

Trick Light Series




TL-1



TL-2



TL-3




TL-4



TL-5



TL-7



TL-8



TL-10

Wall Washer Light Series



WL-1



WL-2



WL-3



WL-4




WL-6



WL-7



WL-8



WL-9



WL-10

Flood light Series



FL-1



FL-2



FL-3



FL-7



FL-8



FL-9

In-ground light Series




IG-1




IG-4



IG-5



IG-6



IG-7

Courtyard light Series



LL-1



LL-9




LL-10



LL-11


轨迹系列

Trick Light Series

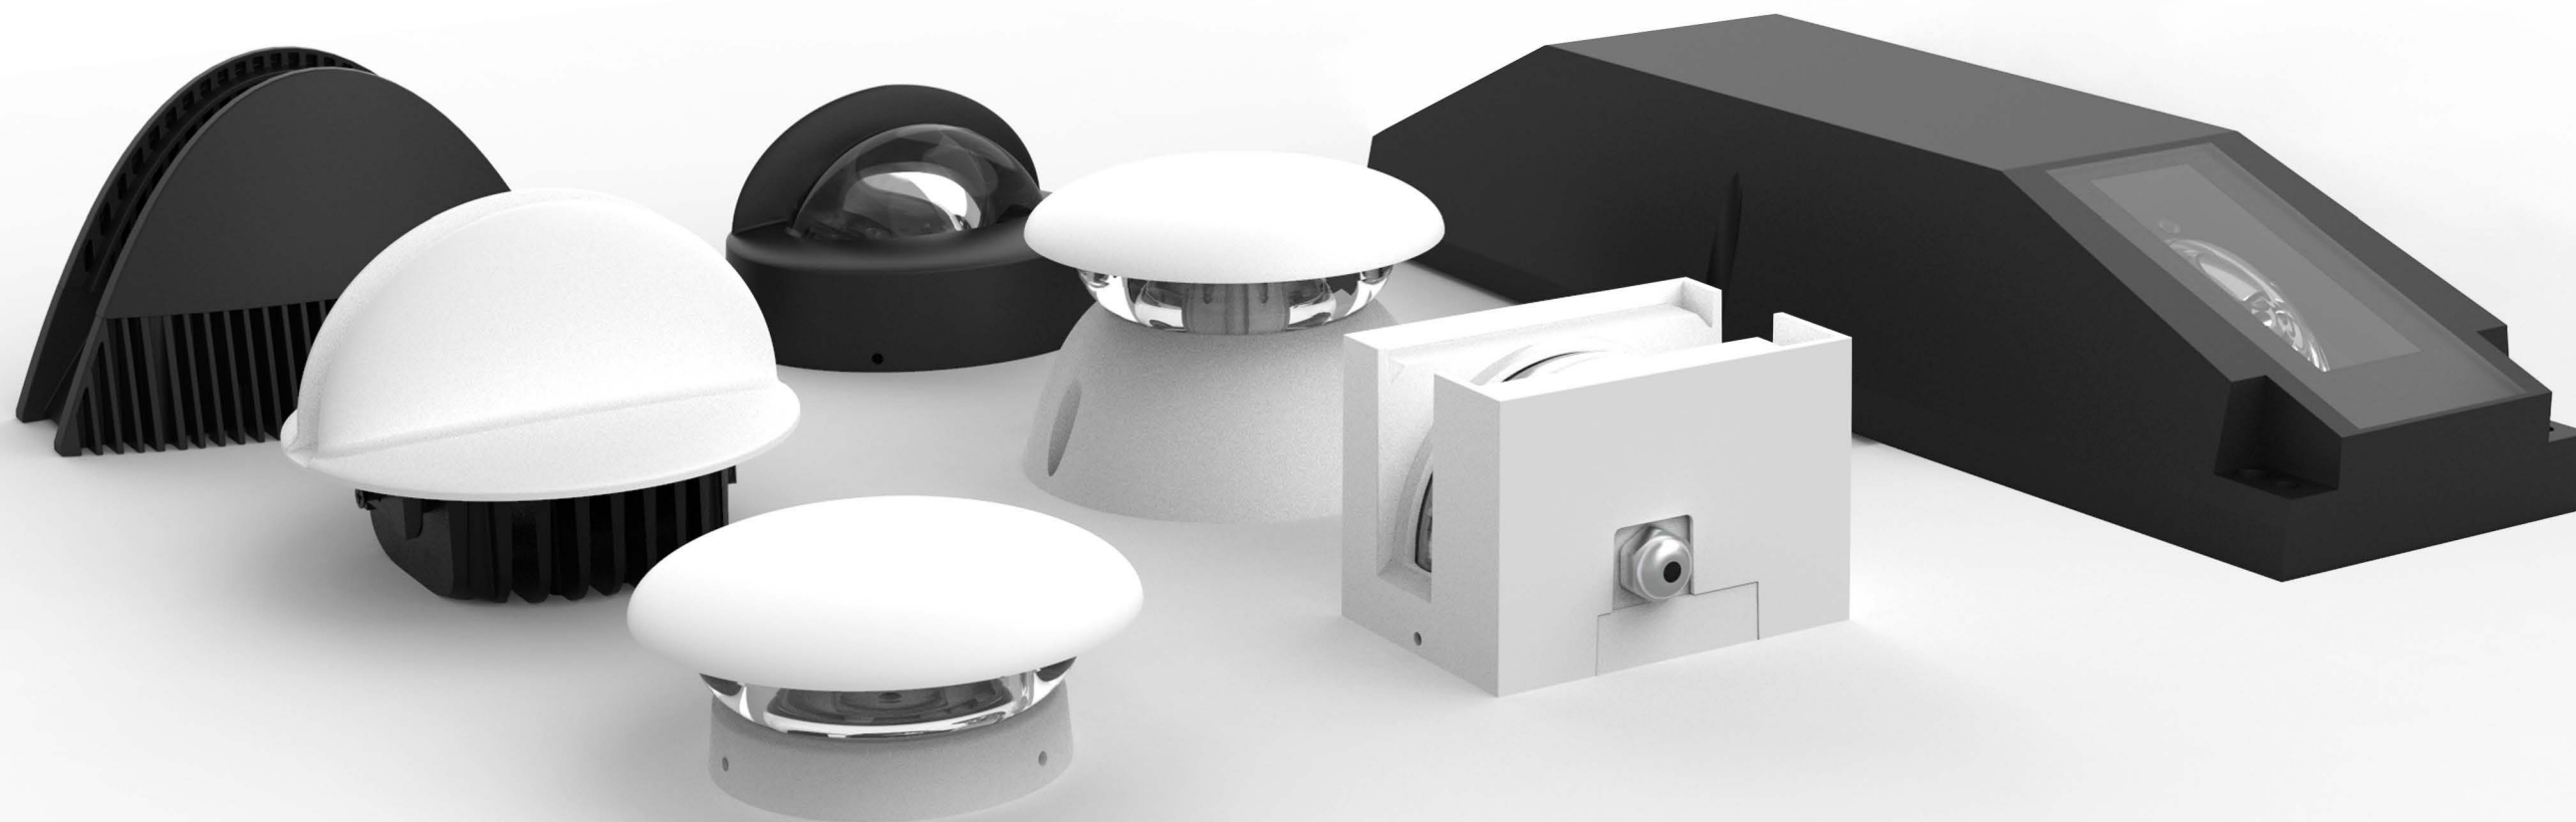


LED

轨迹系列/Trick Light Series

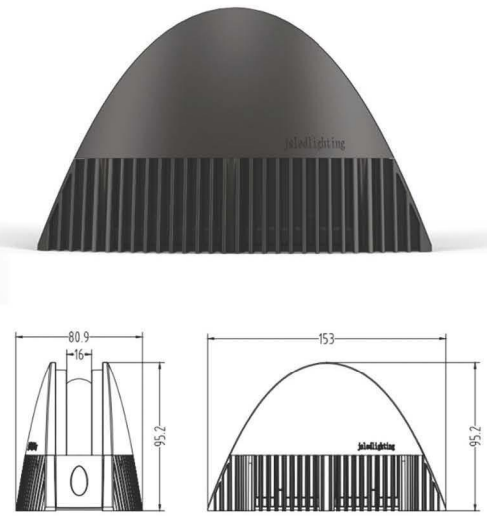

窗台灯/Window Light TL-1


- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞/飞利浦芯片
Cree / Philips chip
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP65
Waterproof grade: IP65
- 应用: 窄角度光学设计, 精致外观, 精准配光, 光斑截止线清晰, 勾勒轮廓, 分割建筑。用于室内照明, 室外照明, 酒店过道, 窗户, 走廊等框架照明。支持光斑定制。
narrow angle optical design, exquisite appearance, precise lighting, clear cut-off line, outline and split the building. For indoor lighting, outdoor lighting, hotel aisles, windows, corridors and other frame lighting. Support customization.



360°




180°

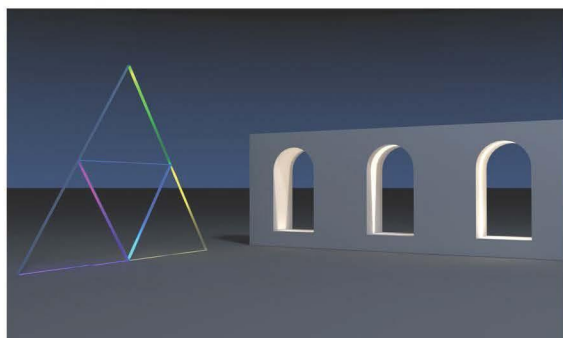


TL-1	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K 5000K	80	8W	276lm	110-277V	180°*2°, 120°*2° 左,120°*2° 右 180°*6°, 120°*6°左,120°*6°右
单彩色: 红/绿/蓝 Single color: Red / Green / blue		8W	276lm	110-277V	180°*2°, 120°*2° 左,120°*2° 右 180°*6°, 120°*6°左,120°*6°右
渐明渐暗 Dimmable	80	8W	276lm	24V	180°*2°, 180°*6°
RGB		9W	305lm	24V	180°*2°, 180°*6°
RGBW		12W	360lm	24V	180°*2°, 180°*6°

轨迹系列/Trick Light Series


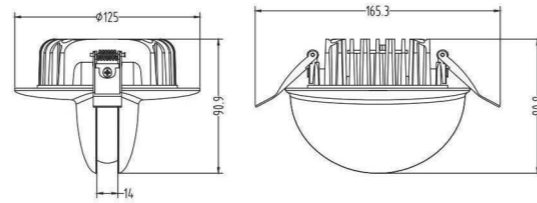


天花灯/Ceiling Light TL-2


- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞/飞利浦芯片
Cree / Philips chip
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP45
Waterproof grade: IP45
- 应用: 精致外观, 精准配光, 光线边沿清晰, 可用于酒店走廊照明, 景区照明, 商场照明, 博物馆内照明, 街道照明。
It has exquisite appearance, precise lighting distribution, clear cut-off line, can be used for hotel corridor lighting, scenic spot lighting, shopping mall lighting, museum inside lighting, street alley lighting.

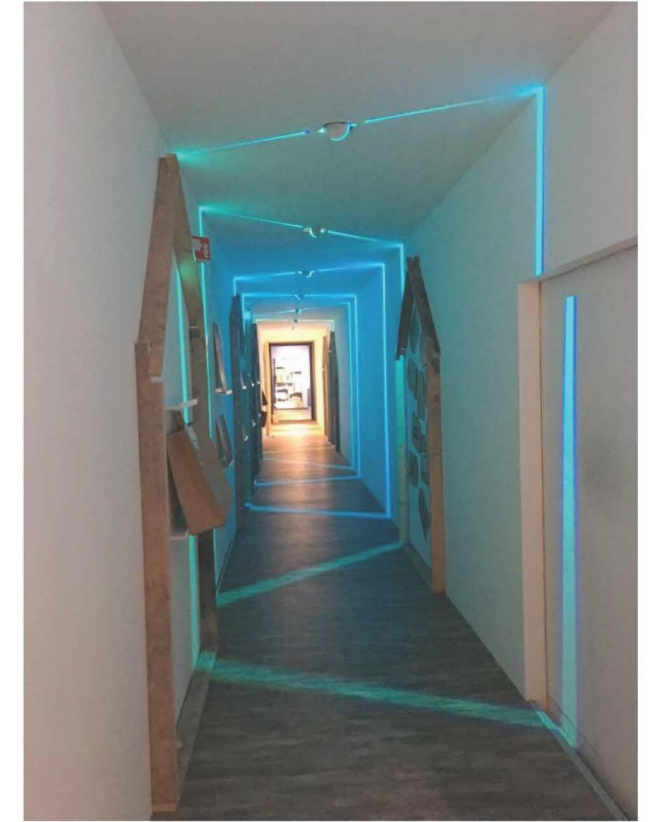

TL-2	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K/5000K	80	6W	180lm	110-277V	360°
单彩色: 红/绿/蓝 Single color: Red / Green / blue		4W	120lm	110-277V	360°
渐明渐暗 Dimmable	80	6W	180lm	24V	360°
RGB		6W	180lm	24V	360°

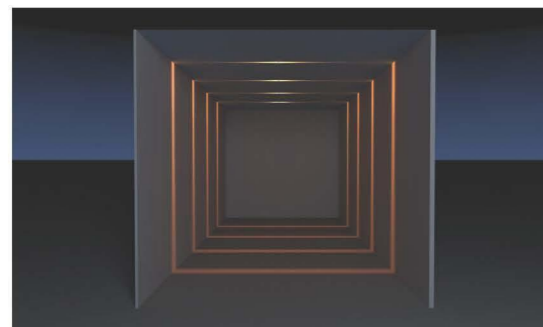


轨迹系列/Trick Light Series

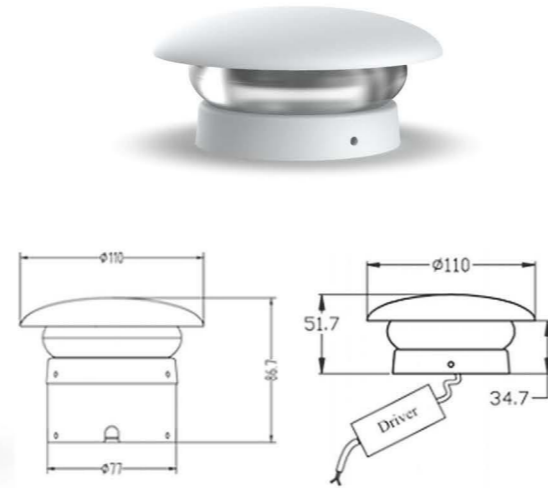


360°壁灯/360°Wall Light TL-3

- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞/飞利浦芯片
Cree / Philips chip
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP45
Waterproof grade: IP45
- 应用: 点线的结合, 完成表面照明, 既有照明效率, 又有装饰效率。适用于室内和室外墙壁照明, 阳台, 外墙, 走廊, 庭院景观, 地标等。
Combination of point and line, completion of surface lighting, both lighting efficiency, but also decorative efficiency. Suitable for indoor and outdoor wall lighting, balconies, exterior walls, corridors, courtyard views, landmarks and so on.





360°

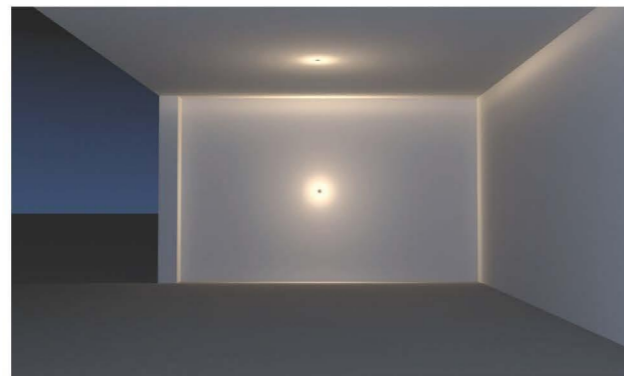




TL-3	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K/5000K	80	6W	380 lm	110-277V	360°*10°
单彩色: 红/绿/蓝 Single color: Red / Green / blue		6W	360 lm	110-277V	360°*10°
渐明渐暗 Dimmable	80	6W	380 lm	24V	360°*10°
RGB		9W		24V	360°*10°
RGBW		12W		24V	360°*10°

轨迹系列/Trick Light Series

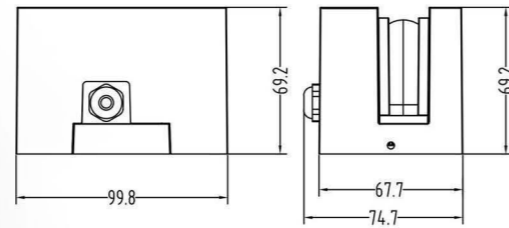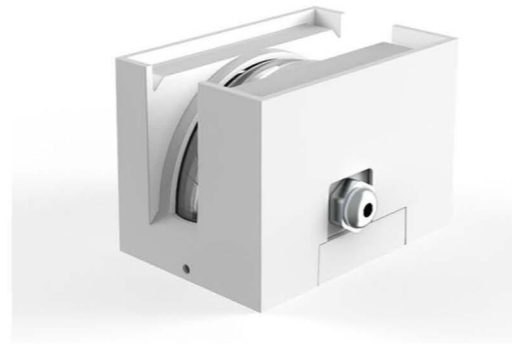



窗框灯/Trick Light TL-4

- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞/飞利浦芯片
Cree / Philips chip
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP65
Waterproof grade: IP65
- 应用: 多种线性光斑, 可根据客户要求定制线性光束长度, 宽度, 单向出光, 双向出光。适用于酒店过道, 窗框轮廓, 走廊, 外墙装饰照明等, 用线性来表达建筑阴影面。
a variety of linear facula, can be customized according to customer requirements linear beam length, width, one-way light, two-way light. It is suitable for hotel corridor, window frame outline, corridor, exterior wall decoration lighting, etc. it uses linear to express architectural shadow surface.

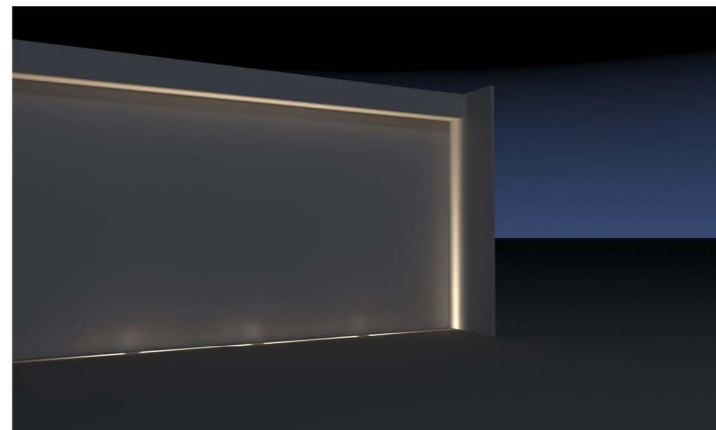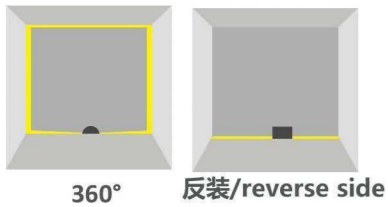

TL-4	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K/5000K	80	6W	180 lm	110-277V	360° /180°
单彩色: 红/绿/蓝 Single color: Red / Green / blue		4W	120 lm	110-277V	360° /180°
渐明渐暗 Dimmable	80	6W	180 lm	24V	360° /180°
RGB		6W		24V	360° /180°
RGBW		8W		24V	360° /180°

轨迹系列/Track Light Series

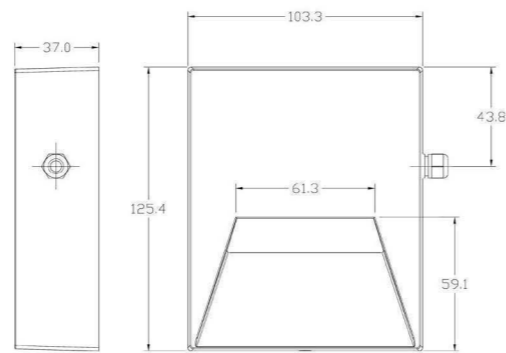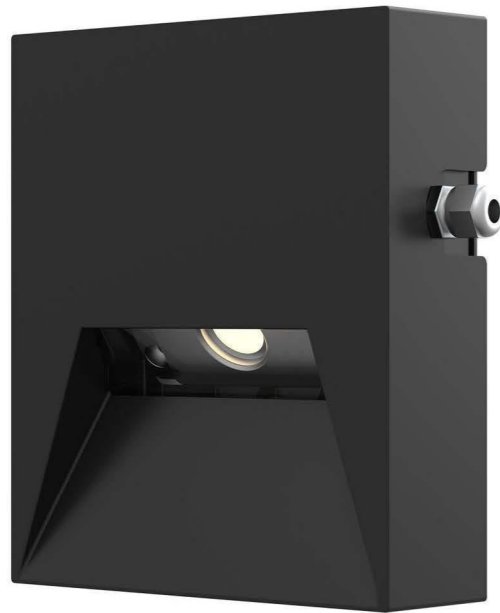

壁灯/Wall lamp TL-5

- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 飞利浦芯片
Philips chip
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP66
Waterproof grade: IP66
- 精致外观, 精准配光, 光线边沿清晰
Exquisite appearance, precise light distribution, clear light edge
- 多种角度设计, 光斑多种选择
Multiple angle design, multiple choices of light spot
- 适用于河道边、护栏等, 实现道路照明、防撞和景观的结合统一
It is suitable for riversides, guardrails, etc., to achieve the combination and unification of road lighting, collision avoidance and landscape



120°




TL-5	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K/5000K	80	3-5W	431 lm	220V	120°

轨迹系列/Trick Light Series



360°壁灯/360°Wall Light TL-7

- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞/飞利浦芯片
Cree / Philips chip
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP65
Waterproof grade: IP65
- 应用: 点与线的结合, 完成了面的照明。适用于室内外照明, 如外墙墙面, 建筑结点, 低矮草坪, 庭院景观, 地标等。主要用于大型购物中心, 现代设计酒店, 商务中心, 创造独特的建筑外观。
The combination of point and line completes the surface lighting. Suitable for indoor and outdoor lighting, such as exterior wall, building node, low lawn, courtyard landscape, landmark, etc. And also used in large shopping centers, modern design hotels and business centers to create unique architectural appearance.




360°*10°



TL-7	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K/5000K	80	15W	780 lm	110-277V	360°*10°
单彩色: 红/绿/蓝 Single color: Red / Green / blue		15W	760 lm	110-277V	360°*10°
渐明渐暗 Dimmable	80	15W	780 lm	24V	360°*10°
RGB		18W		24V	360°*10°
RGBW		24W		24V	360°*10°

轨迹系列/Trick Light Series

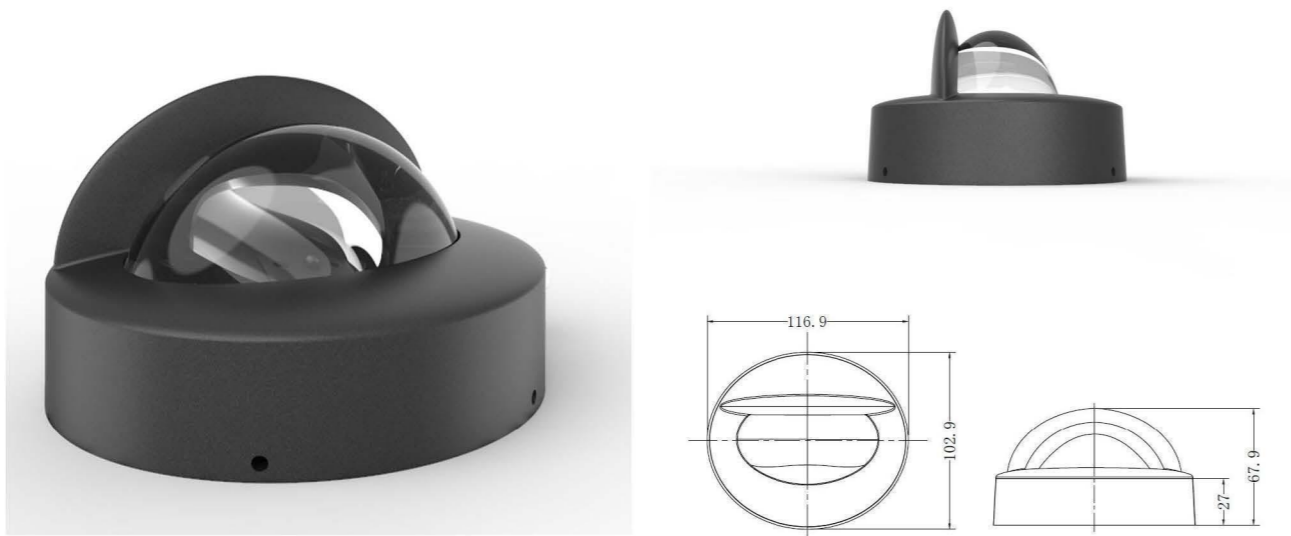


偏光窗台灯/Polarized Window Light TL-8


- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞/飞利浦芯片
Cree / Philips chip
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP65
Waterproof grade: IP65
- 应用: 面线结合, 打造光影效果。适用于室内外照明, 如护栏, 古建屋檐, 建筑空腔, 建筑外立面等。
Combination of surface and line, it creates light and shadow effect. Suitable for indoor and outdoor lighting, such as guardrail, eaves of ancient buildings, building cavity, building facade, etc.



TL-8	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K 5000k/	80	6.5W	485 lm	24v	53*110.5°
渐明渐暗 Dimmable	80	6.5W	485 lm	24v	53*110.5°
RGBW	80	10W	485 lm	24v	53*110.5°




110°

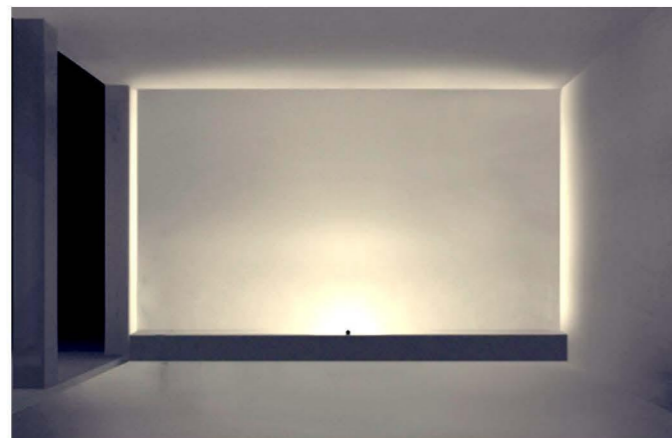

洗墙系列

Wall Washer Light Series

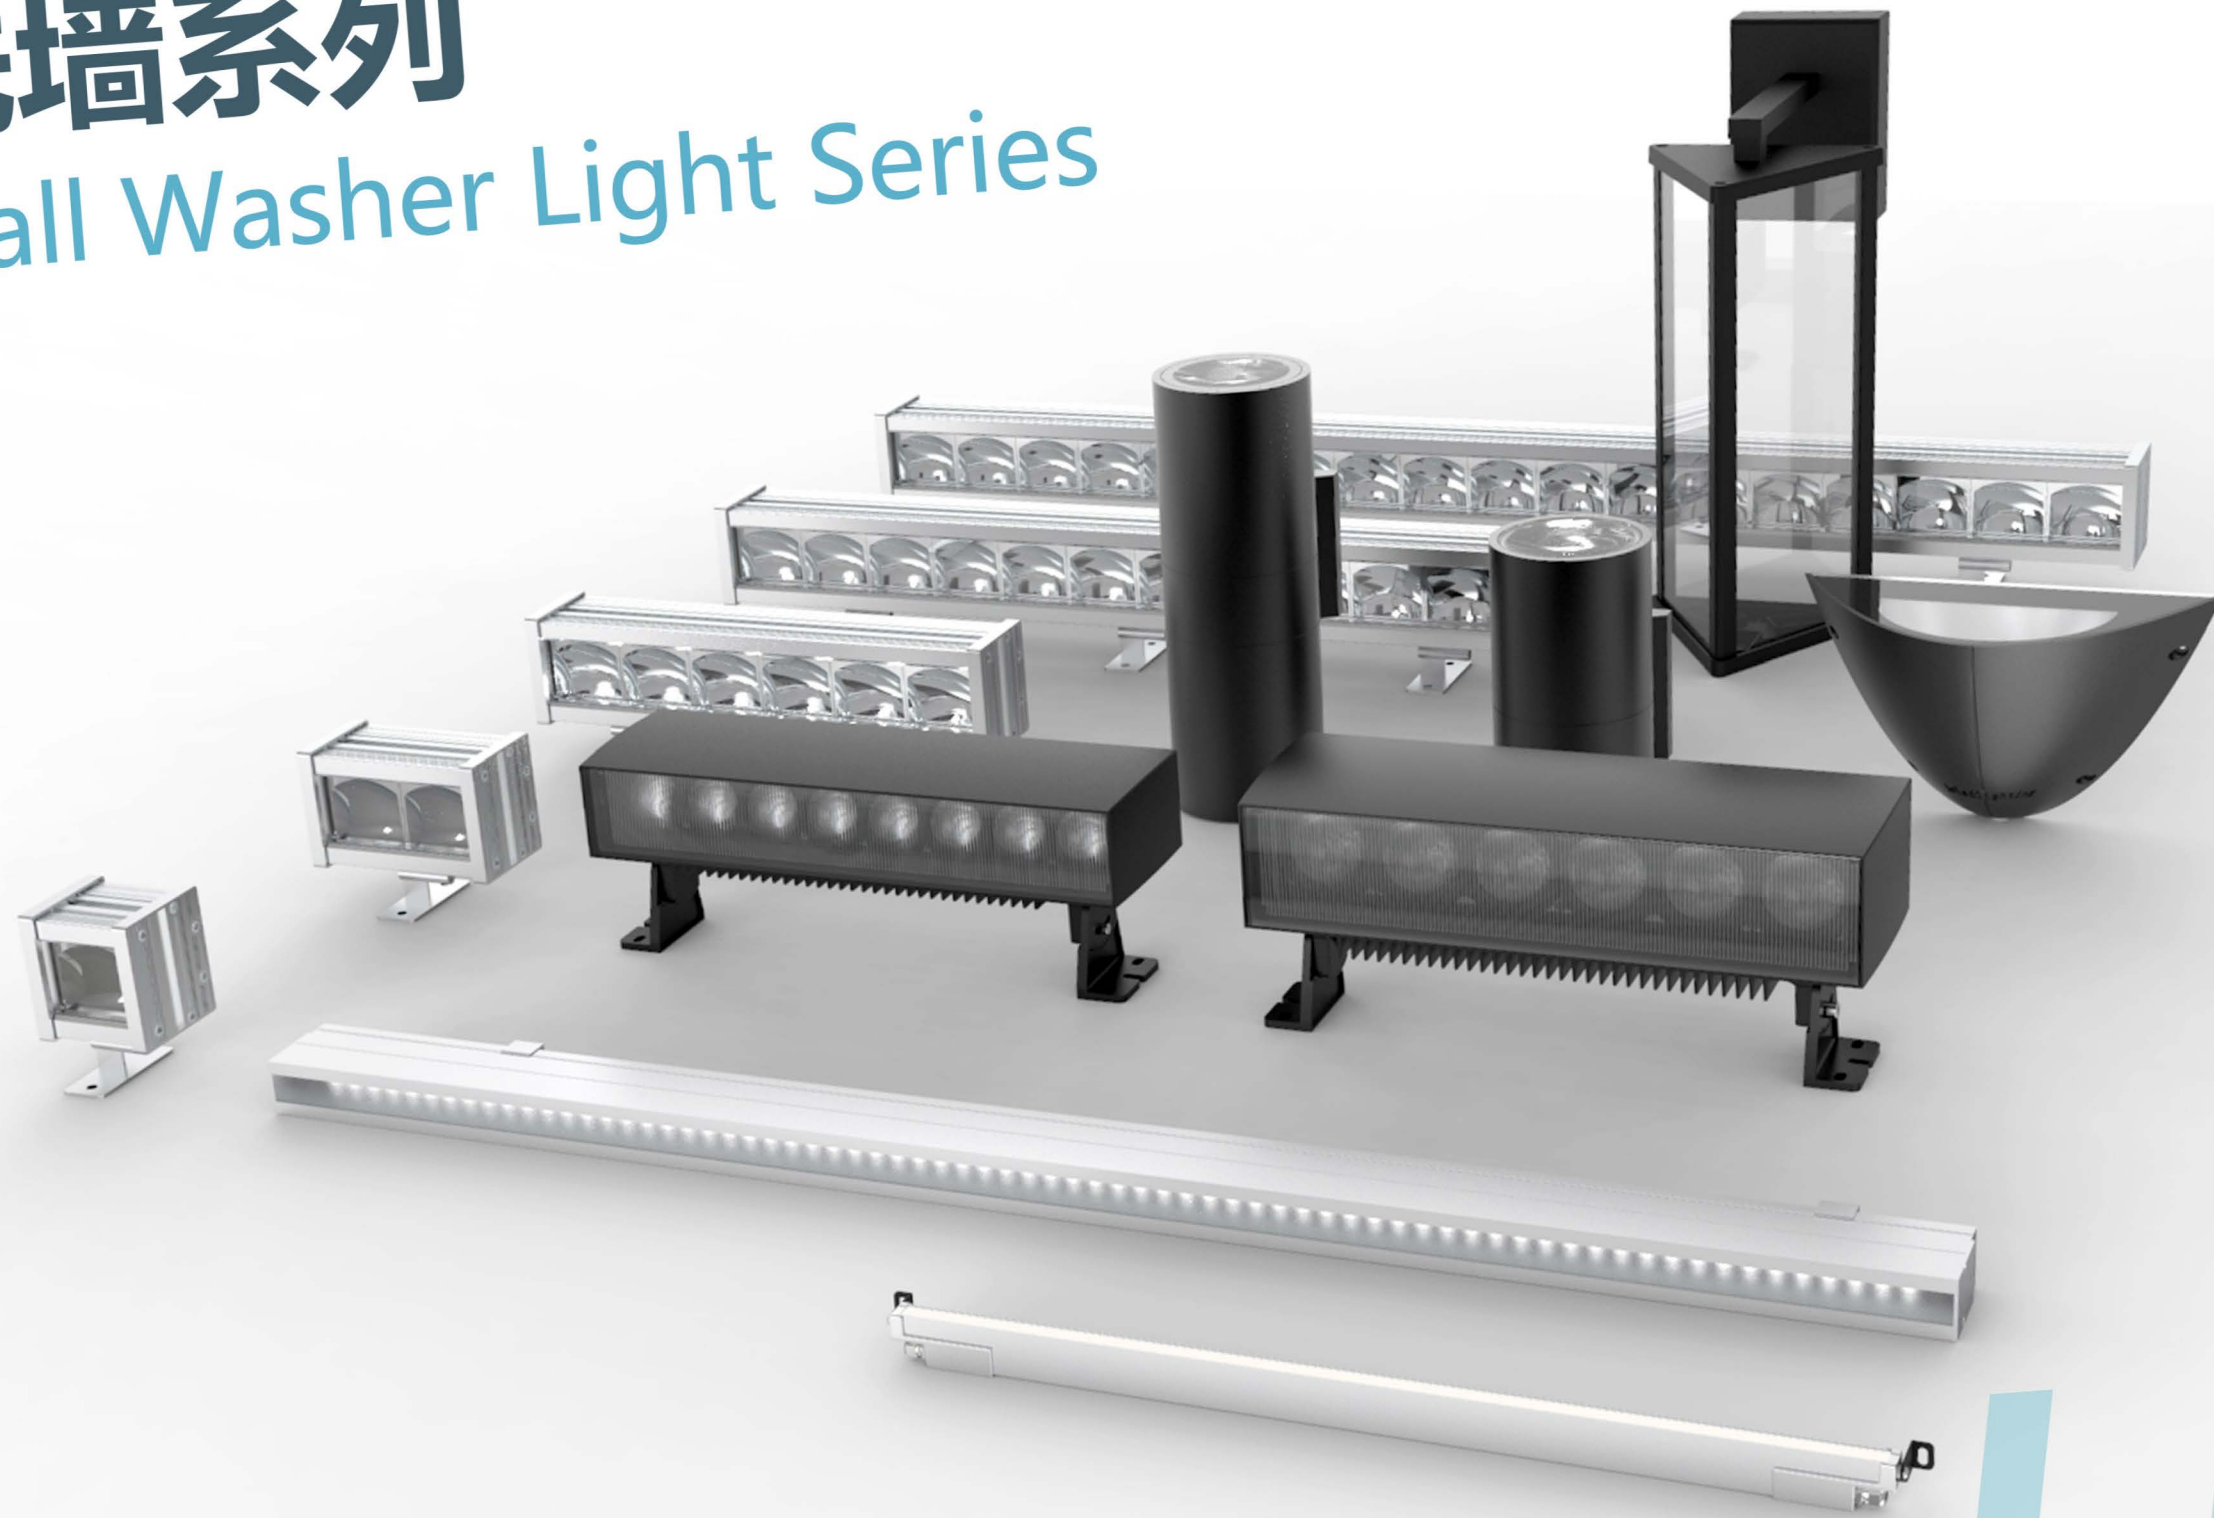

LED

洗墙系列/Wall Washer Light Series





超窄角度洗墙灯/Ultra Narrow Angle Wall Washer Light WL-1


- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞/西铁城/欧司朗芯片
Cree /Citizen/OSRAM
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP65
Waterproof grade: IP65
- 应用: 长距离窄光束 led 投射, 照射距离可达 20-30 米, 勾勒高层建筑外观, 适用于建筑外墙立面, 古建墙柱照明等。
Long distance narrow beam LED projection, irradiation distance up to 20-30 meters, outline the appearance of high-rise buildings, suitable for building facade, ancient building wall column lighting, etc.



WL-1	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K/5000K	80	18W	623lm	110-277V	8°
渐明渐暗 Dimmable	80	12W	420lm	24V	8°
3000K/4000K/5000K	80	24W	1080lm	110-277V	12°

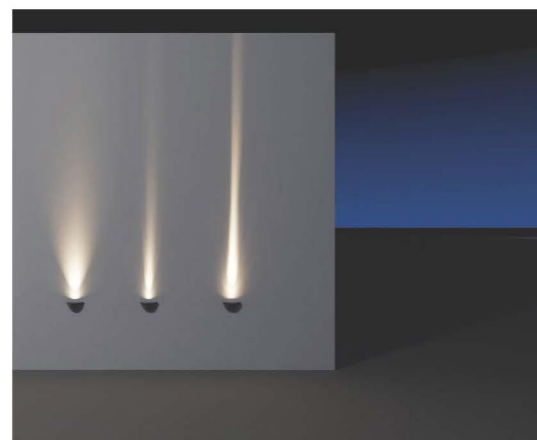
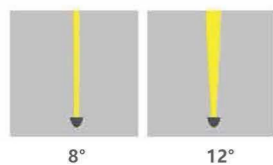


洗墙系列/Wall Washer Light Series

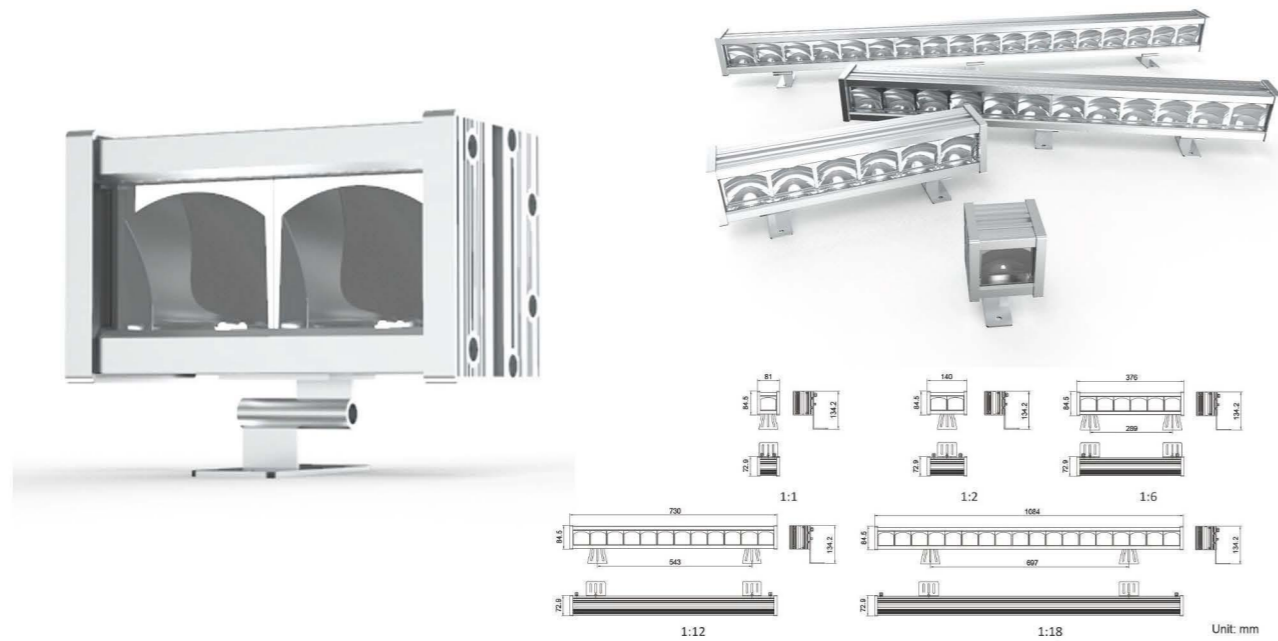


洗墙灯/Wall Washer Light WL-2

- 外壳：压铸铝，粉末涂层；表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞芯片
Cree
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级：IP65
Waterproof grade: IP65
- 应用：照射距离可达 15-20 米，更适用于高层建筑亮化。模块化结构，不同尺寸和瓦数供选择，满足不同高度和宽度墙面需求。
Irradiation distance up to 15-20 meters, more suitable for high-rise building lighting. Modular structure, different sizes and wattage for choice, to meet the needs of different height and width of the wall.

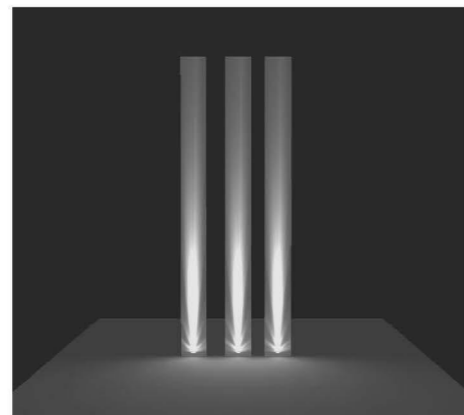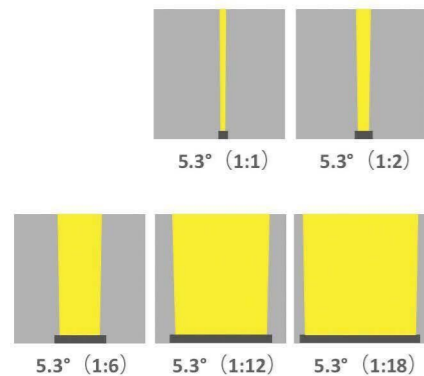

WL-2	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K 5000K	80	3w/6w/12w/24w/36w	217.4lm(3w) 1320lm(6w)	24V	1°
		6w/12w/24w/36w	2608.8lm(12w) 3913.2lm(24w) 1630.5lm(36w)	100-240V	
单彩色：红绿蓝 Single color: Red / Green / blue	80	3w/6w/12w/24w/36w	217.4lm(3w) 1320lm(6w)	24V	1°
		6w/12w/24w/36w	2608.8lm(12w) 3913.2lm(24w) 1630.5lm(36w)	100-240V	
渐明渐暗 Dimmable	80	3w/6w/12w/24w/36w	217.4lm(3w) 1320lm(6w)	24V	1°
		6w/12w/24w/36w	2608.8lm(12w) 3913.2lm(24w) 1630.5lm(36w)		

洗墙系列/Wall Washer Light Series

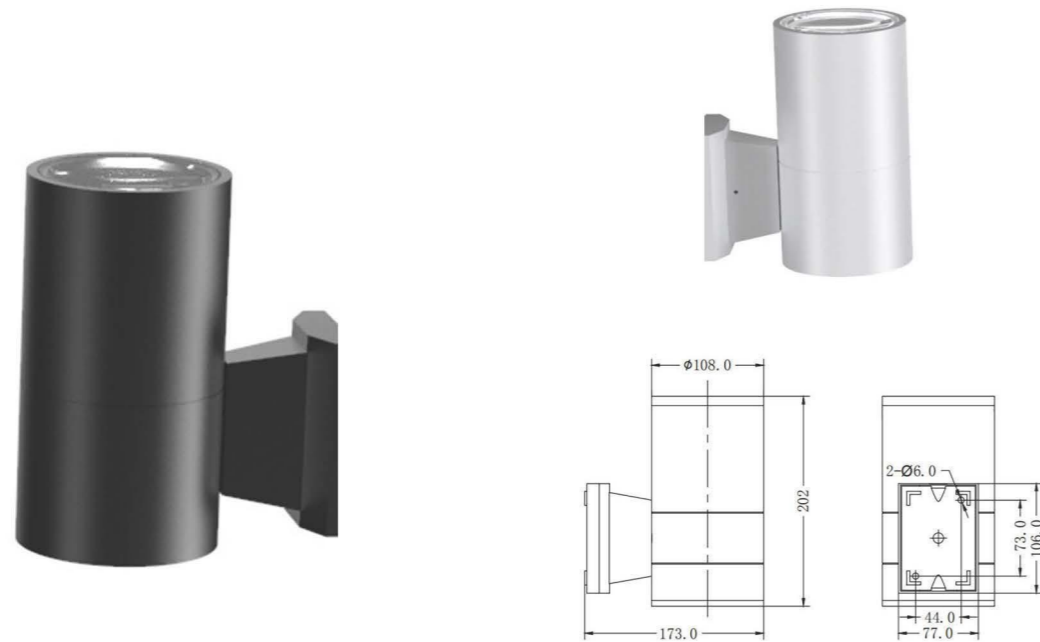


单头壁灯/Single wall light WL-3

- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞芯片
Cree
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP65
Waterproof grade: IP65
- 应用: 单向出光户外墙灯, 主要用于建筑外墙, 圆柱照明, 户外景观装饰等。多种角度营造不同的灯光氛围。
Application: Single direction outdoor wall light, mainly used for building exterior wall, column lighting, outdoor landscape decoration, etc. different angles create different lighting atmosphere.



WL-3	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K 5000K	80	10w	411lm(5.4°) 430.17lm(15°) 448.17lm(65°) 498.17lm(110°)	110-277v	5.4°/15°/ 65°/110°
渐明渐暗 Dimmable	80	10w	411lm(5.4°) 430.17lm(15°) 448.17lm(65°) 498.17lm(110°)	24v	5.4°/15°/ 65°/110°
RGBW		10w		24v	5.4°/15°/ 65°/110°



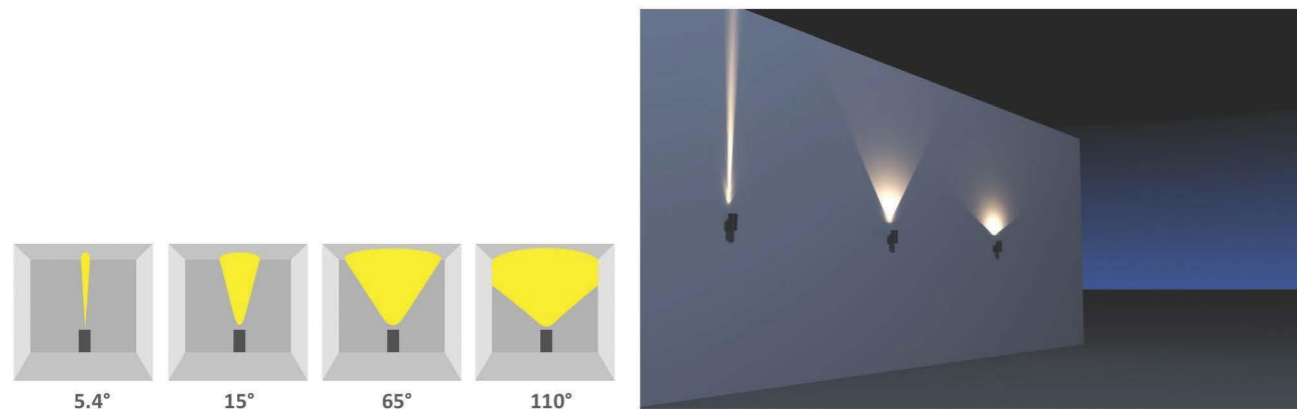


洗墙系列/Wall Washer Light Series




上下壁灯/Up and Down Wall Light WL-4

- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞芯片
Cree
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP65
Waterproof grade: IP65
- 应用: 双向出光户外墙灯, 主要用于建筑外墙, 圆柱照明, 户外景观装饰等。可组合成不同的光斑形状, 营造不同的灯光氛围。
Up and down direction outdoor wall light is mainly used for building exterior wall, column lighting, outdoor landscape decoration, etc. different angles can be combined into different spot shapes to create different lighting atmosphere.

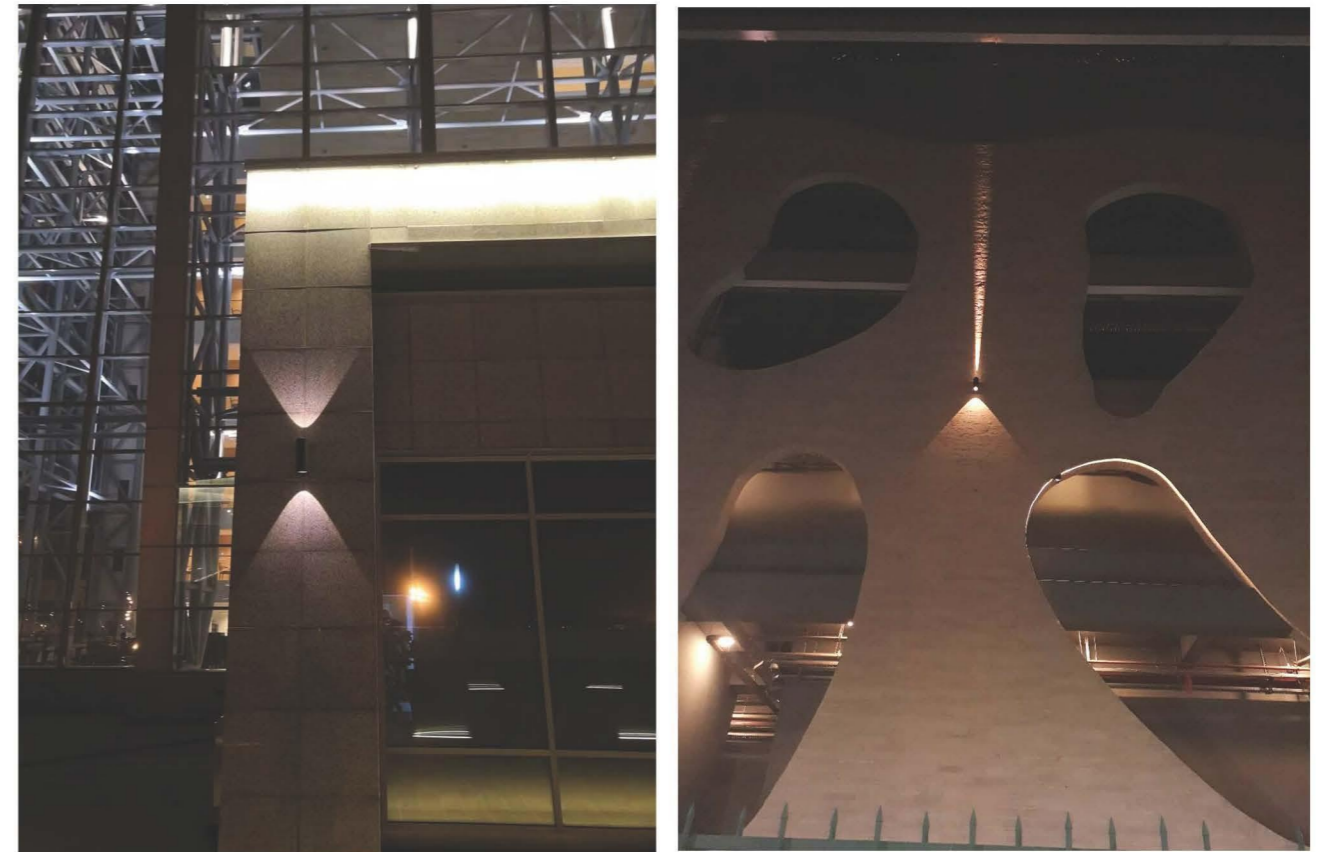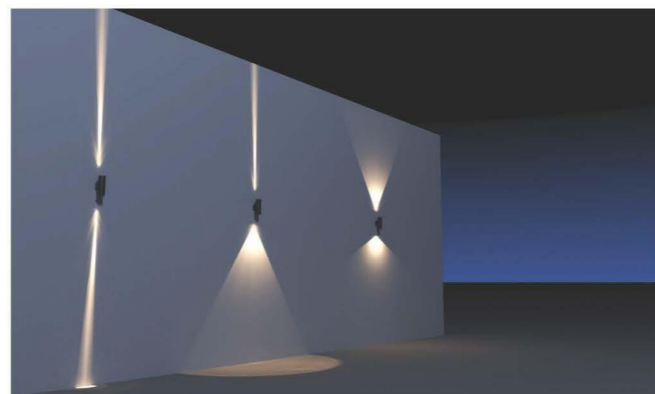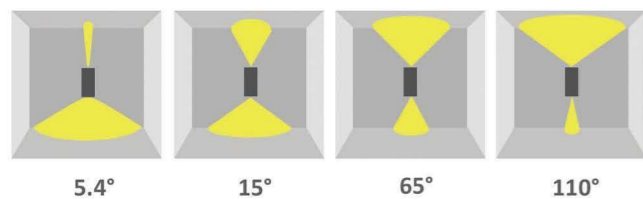

WL-4	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K 5000K	80	20w	411lm(5.4°) 430.17lm(15°) 448.17lm(65°) 498.17lm(110°)	110-277v	5.4°/15°/ 65°/110°
渐明渐暗 Dimmable	80	20w	411lm(5.4°) 430.17lm(15°) 448.17lm(65°) 498.17lm(110°)	24v	5.4°/15°/ 65°/110°
RGBW	80	20w		24v	5.4°/15°/ 65°/110°

洗墙系列/Wall Washer Light Series

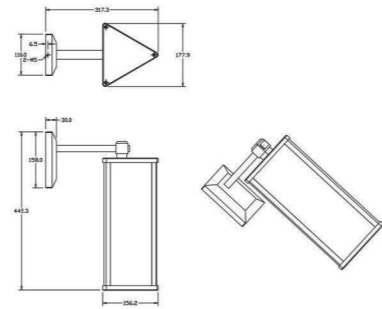


三角壁灯/Triangular Wall Light WL-6


- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞芯片
Cree
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP65
Waterproof grade: IP65
- 应用: 室外外墙照明, 装饰性作用。营造光与影的效果和氛围。适用于现代建筑, 古建筑, 园林外墙等, 凸显墙面, 与环境融合。
Outdoor external wall lighting, decorative function. Create the effect and atmosphere of light and shadow. It is suitable for modern architecture, ancient architecture, garden exterior wall, etc. to highlight the wall and integrate with the environment.



WL-6	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K 5000K	80	25w	1335lm	110-277v/24v	360°



洗墙系列/Wall Washer Light Series

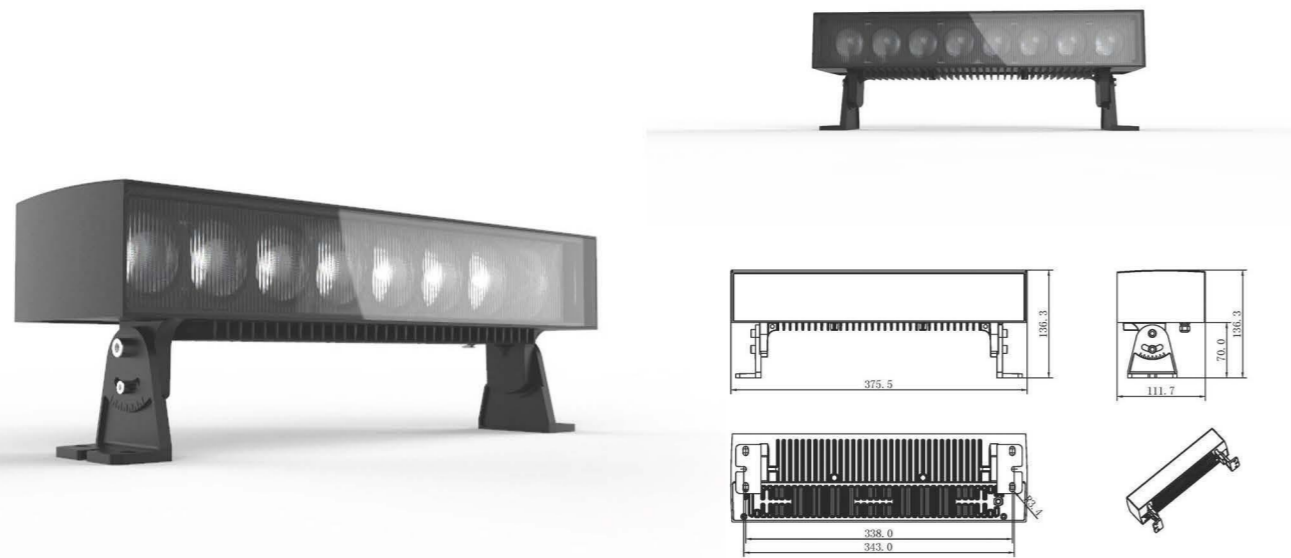


洗墙灯/Wall Washer Light WL-7

- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞芯片
Cree
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP65
Waterproof grade: IP65
- 应用: 远距离窄光束投洗灯, 照射距离可达 25-30 米, 更适用于高层建筑亮化, RGBW 专利光学系统, 色彩丰富饱满灵动, 过度自然, 广泛适用于铝板幕墙, 建筑立面以及地标性建筑等。
It is more suitable for high-rise buildings with narrow beam and long-distance illumination of 25-30 meters. RGBW patented optical system is rich in color, flexible and natural, widely used in aluminum curtain wall, building facade and landmark buildings.




8.4*12.9°

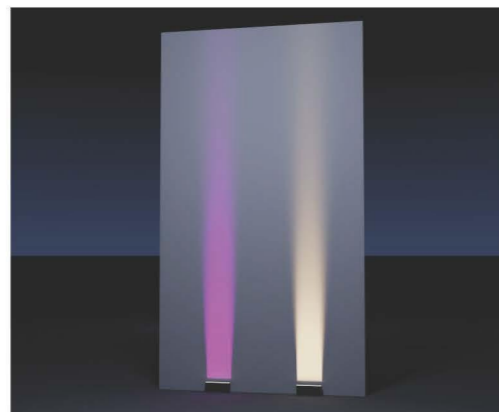

WL-7	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K 5000K	80	40w/50w	1360lm/1700lm	110-277v	8.4*12.9°
双色温 Two color temperature	80	50w	1700lm	24v	8.4*12.9°
渐明渐暗 Dimmable	80	50w	1700lm	24v	8.4*12.9°
RGBW		65w		24v	8.4*12.9°

洗墙系列/Wall Washer Light Series

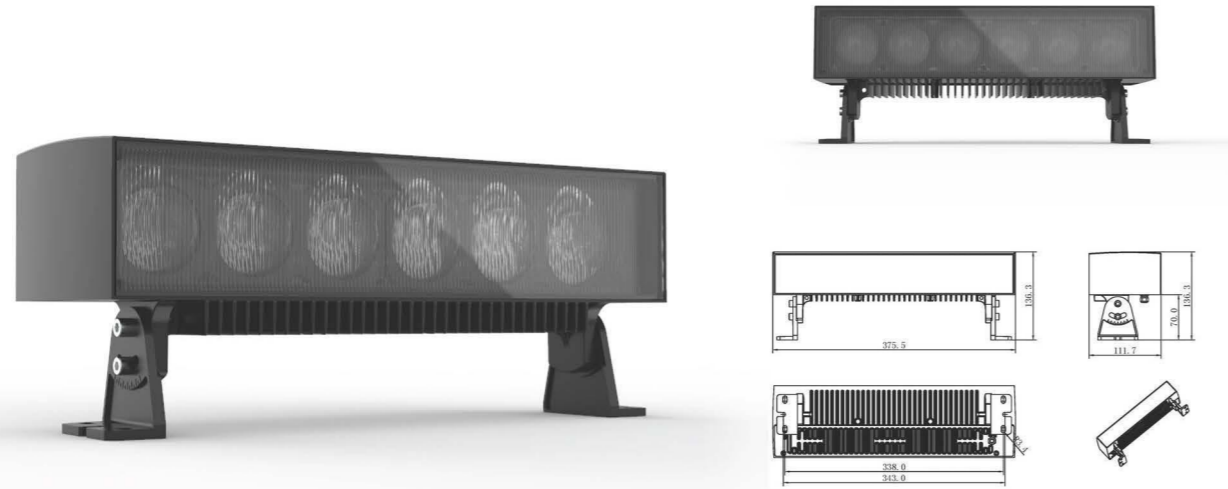


洗墙灯/Wall Washer Light WL-8

- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞芯片
Cree
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP65
Waterproof grade: IP65
- 应用: 大功率 led 投洗灯, 远距离窄光束投洗灯, 照射距离可达 35-40 米, 更适用于高层建筑亮化。RGBW 专利光学系统, 色彩丰富饱满灵动, 过度自然, 广泛适用于铝板幕墙, 建筑立面以及地标性建筑等。
High power LED wash flood light, long distance narrow beam wash flood light, irradiation distance up to 35-40 meters, more suitable for high-rise building lighting. RGBW patented optical system is rich in color, flexible and natural, widely used in aluminum curtain wall, building facade and landmark buildings.




8.4*12.9°

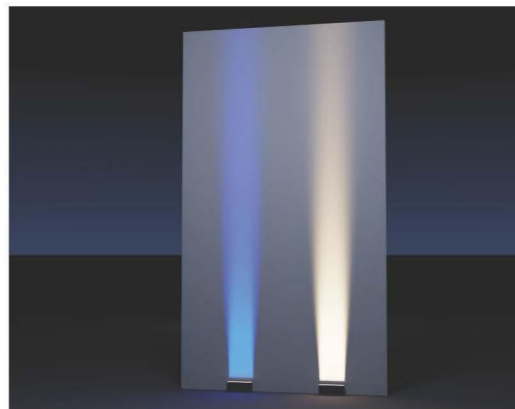

WL-8	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K/5000K	80	90w	3060lm	100-240v	8.4*12.9°
双色温 Two color temperature	80	90w	2950lm	24v	8.4*12.9°
渐明渐暗 Dimmable	80	90w	3060lm	24v	8.4*12.9°
RGBW		100w		24v	8.4*12.9°

洗墙系列/Wall Washer Light Series

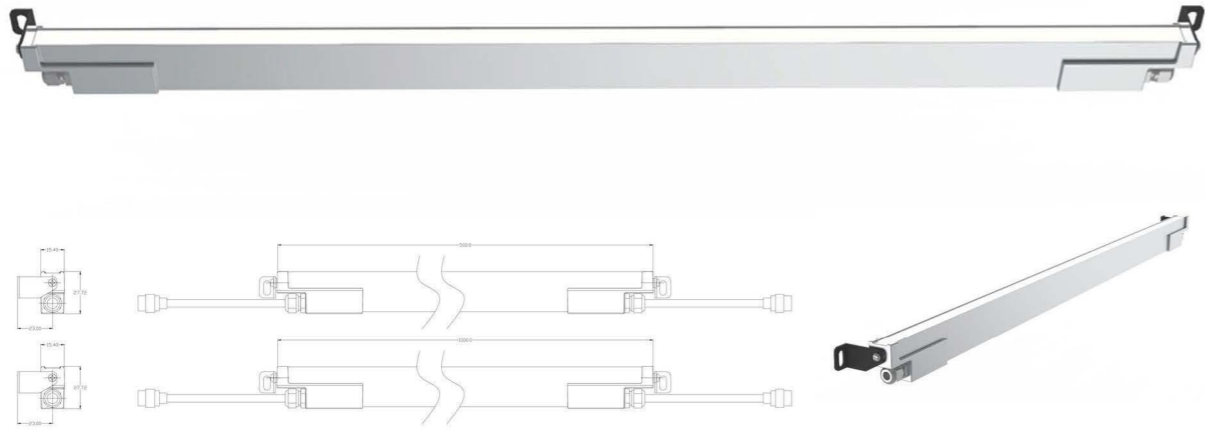


超薄洗墙灯/Ultra-thin Wall Washer Light WL-9

- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞芯片
Cree
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP65
Waterproof grade: IP65
- 应用: 极薄型线条灯, 灯体小巧可隐藏, 适用于短距离洗墙, 如台阶, 现代建筑, 古建筑, 花园外墙等。
Extremely thin line light, small and can be hidden, suitable for short distance wall washing, such as steps, modern buildings, ancient buildings, garden walls, etc.




20*60°

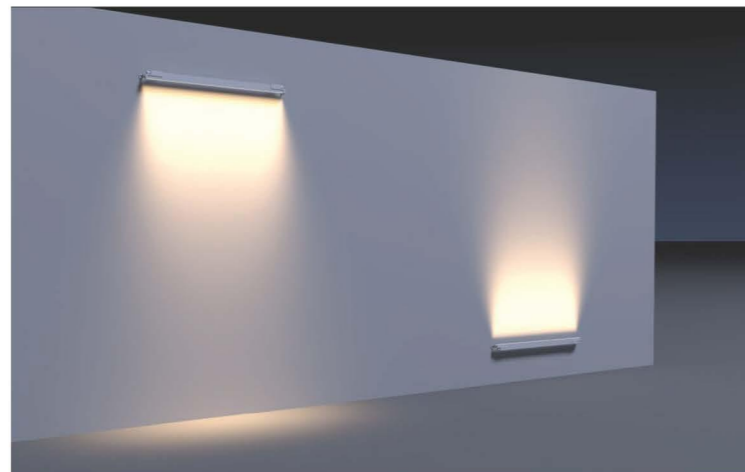

WL-9	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K/5000K	80	12w/18w	504w/702lm	24v	20*60°

洗墙系列/Wall Washer Light Series

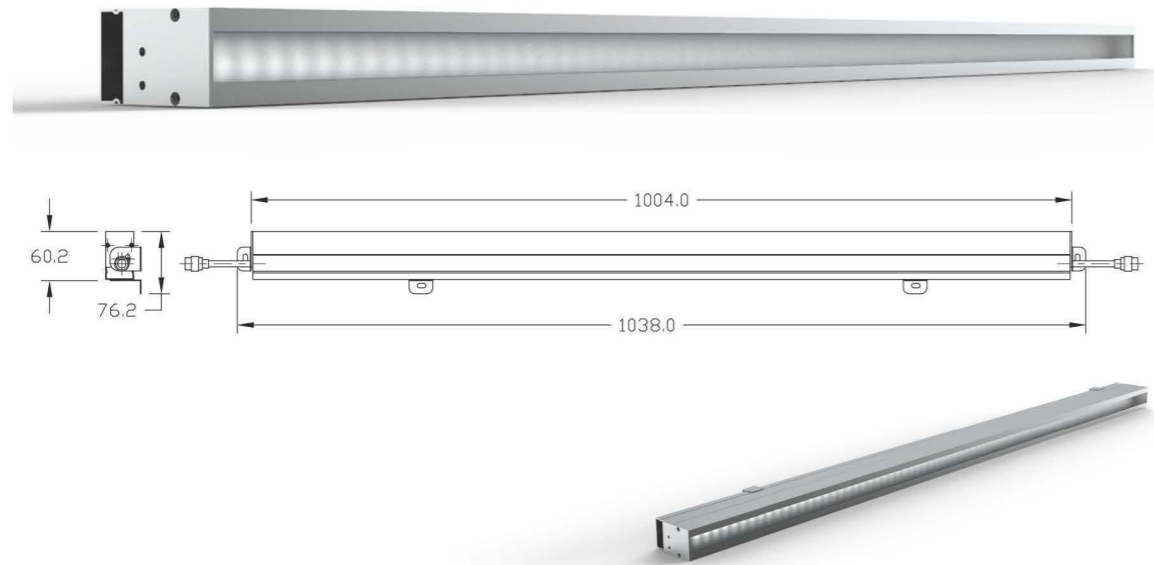


超薄洗墙灯/Ultra-thin Wall Washer Light WL-10


- 外壳：压铸铝，粉末涂层；表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞芯片
Cree
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级：IP65
Waterproof grade: IP65
- 应用：外观精致小巧，易于安装及隐藏，广泛适用于各种洗墙，现代建筑，古建筑，花园外墙等。
The appearance is exquisite and small, easy to install and hide, widely used in all kinds of wall washing, modern buildings, ancient buildings, garden walls and so on.



WL-10	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K/5000k	80	24w/36w	936lm/1404lm	24v	20*60°



20*60°

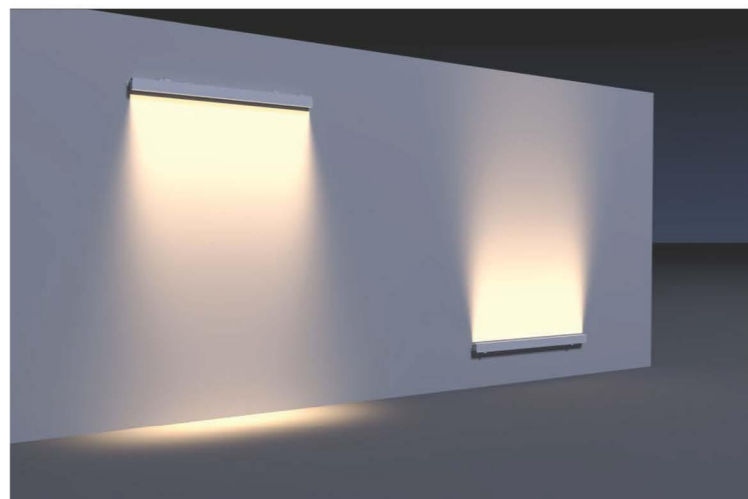


投光系列

Flood light Series



LED

Flood Light Series

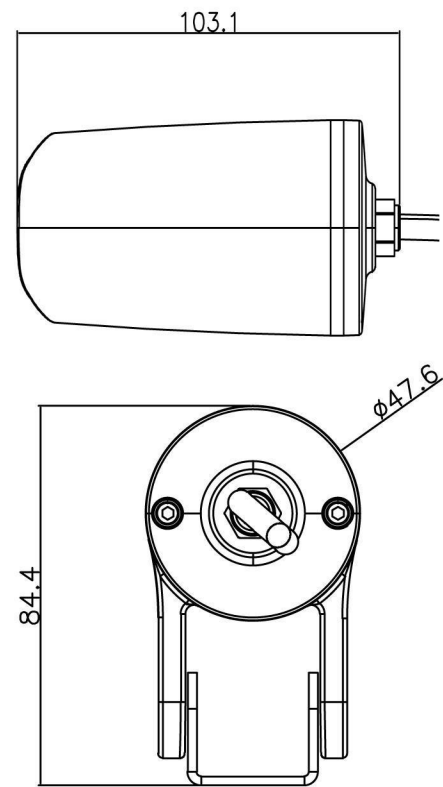


Tree Spot Light FL-1

- Shell: die casting aluminum, powder coating; customized color
- Cree / Philips chip
- Jinshun / DMX512 control device
- Waterproof grade: IP65
- Application: it can be applied to a variety of bushes, grasses, trees and other landscape lighting, but also can be applied to external walls, windows, fashion stores, hotels and other indoor and outdoor applications. Used to show the fading effect of different colors, or to create a colorful atmosphere with RGBW.




FL-1	CRI/RA	Power/W	LED	Voltage/V	Angle/°
3000K	80	3W	SMD	DC24V	20°/25°/30°
RGBW	80	6W	Custom chip	DC24V	20°/25°/30°

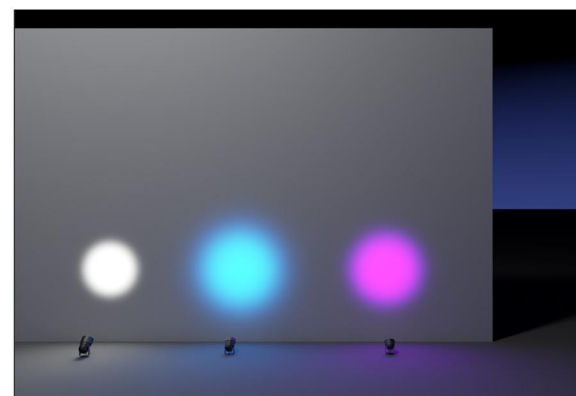



Flood Light Series


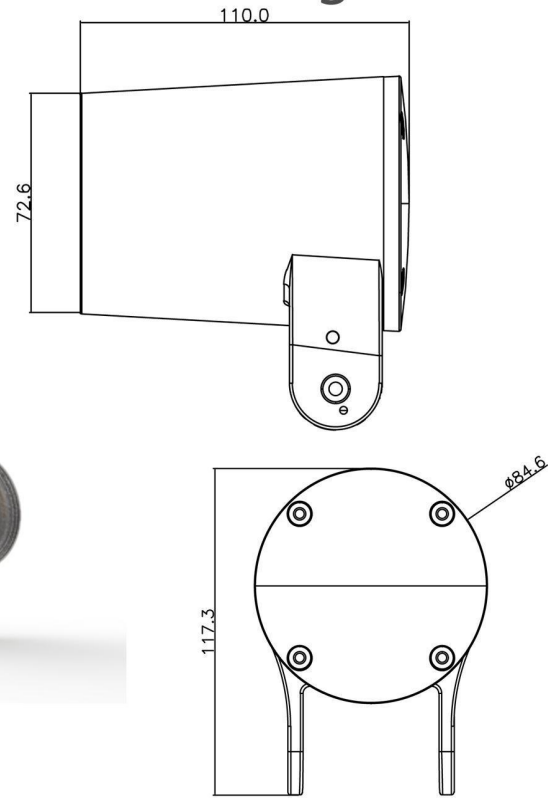


Tree Spot Light FL-2



- Shell: die casting aluminum, powder coating; customized color
- Cree / Philips chip
- Jinshun / DMX512 control device
- Waterproof grade: IP65
- Application: it can be applied to a variety of bushes, grasses, trees and other landscape lighting, but also can be applied to external walls, windows, fashion stores, hotels and other indoor and outdoor applications. Used to show the fading effect of different colors, or to create a colorful atmosphere with RGBW.



FL-2	CRI/RA	Power/W	LED	Voltage/V	Angle/°
3000K/4000K	80	9W	SMD	DC24V	47°
RGBW	80	10W	SMD	DC24V	7°/32°
Light Blue	80	12W	SMD	DC24V	55°

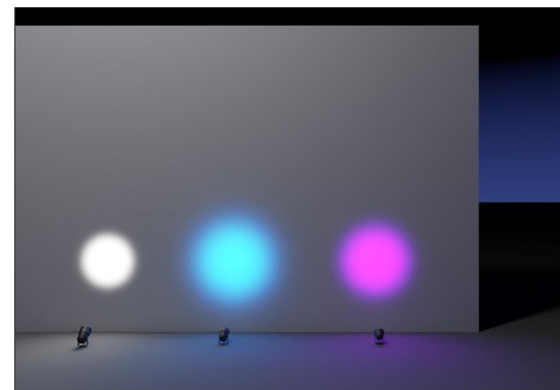
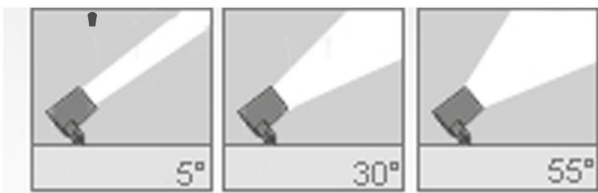


Flood Light Series

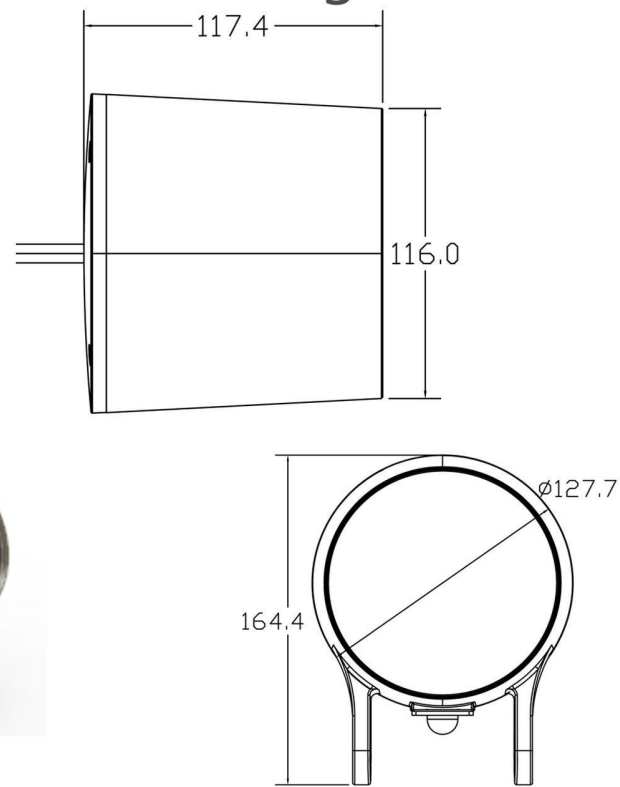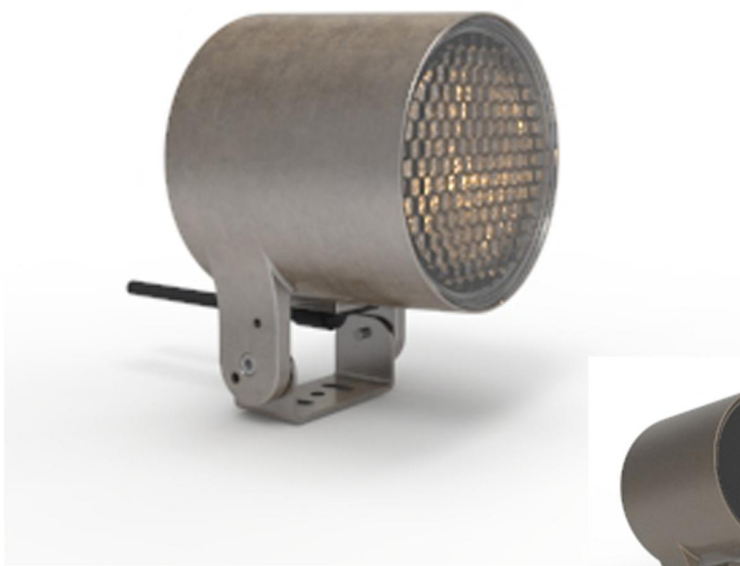


Tree Spot Light FL-3

- Shell: die casting aluminum, powder coating; customized color
- Cree / Philips chip
- Jinshun / DMX512 control device
- Waterproof grade: IP65
- Application: it can be applied to a variety of bushes, grasses, trees and other landscape lighting, but also can be applied to external walls, windows, fashion stores, hotels and other indoor and outdoor applications. Used to show the fading effect of different colors, or to create a colorful atmosphere with RGBW.

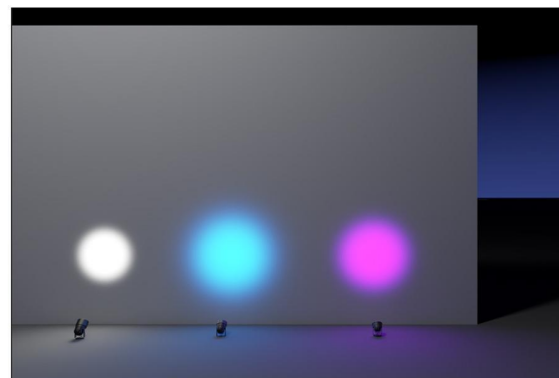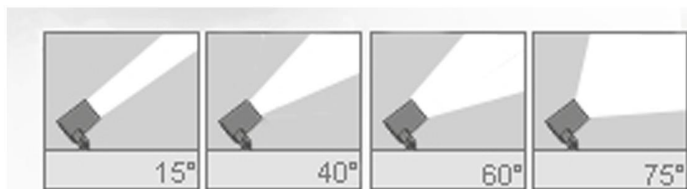





FL-3	CRI/RA	Power/W	LED	Voltage/V	Angle/°
3000K	80	18W	COB	100-277V	18°/50°
3000K	80	24W	COB	100-277V	40°
3000K	80	18W	SMD	100-277V	58°/75°
3000K	80	24W	SMD	100-277V	58°/65°/75°
RGBW	80	30W	Cree	DC24V	28°/65°

Flood Light Series

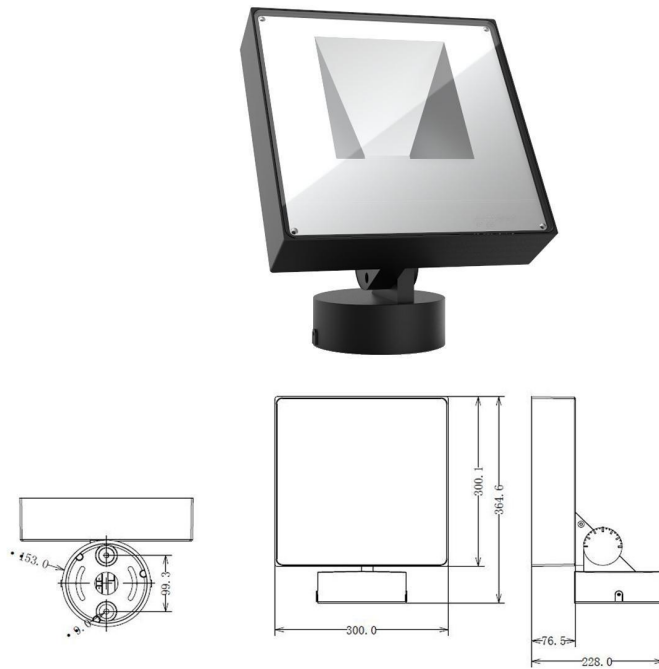


Flood Light FL-7

- Shell: die casting aluminum, powder coating; customized color
- Cree / Philips chip
- Jinshun control device
- Waterproof grade: IP65
- Application: suitable for green plants, bridges, eaves, sculptures, roofs, etc. Complete casting options and budgets are available.

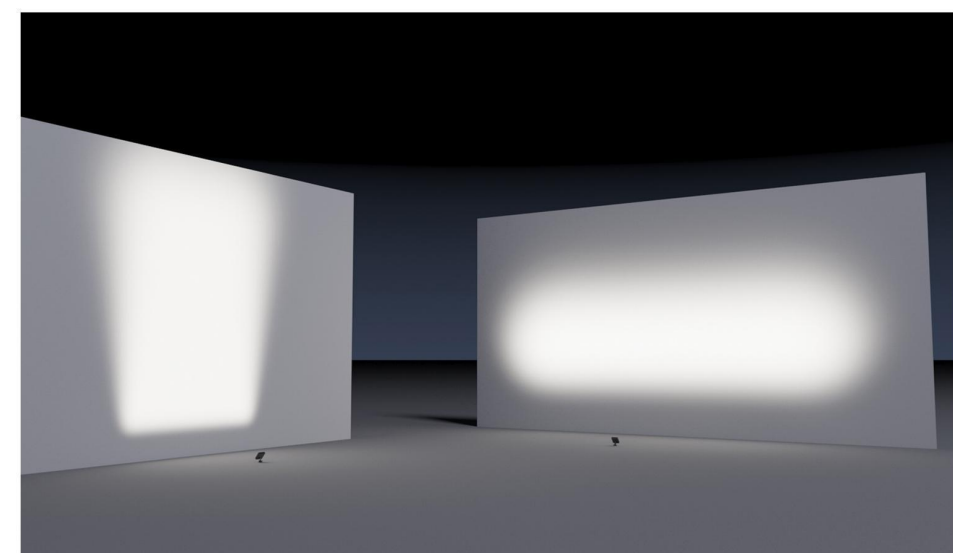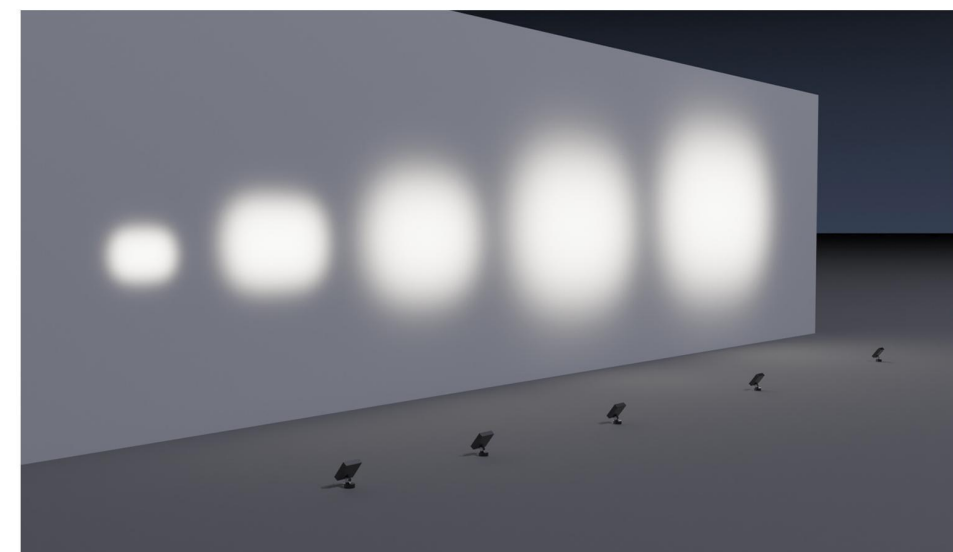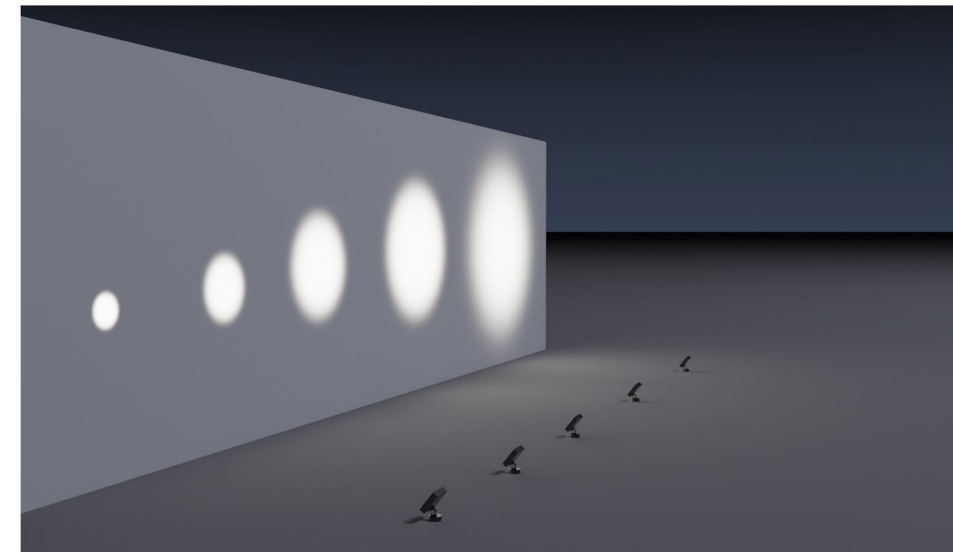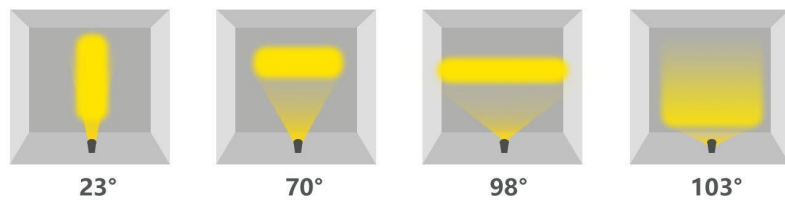

Flood Light Series

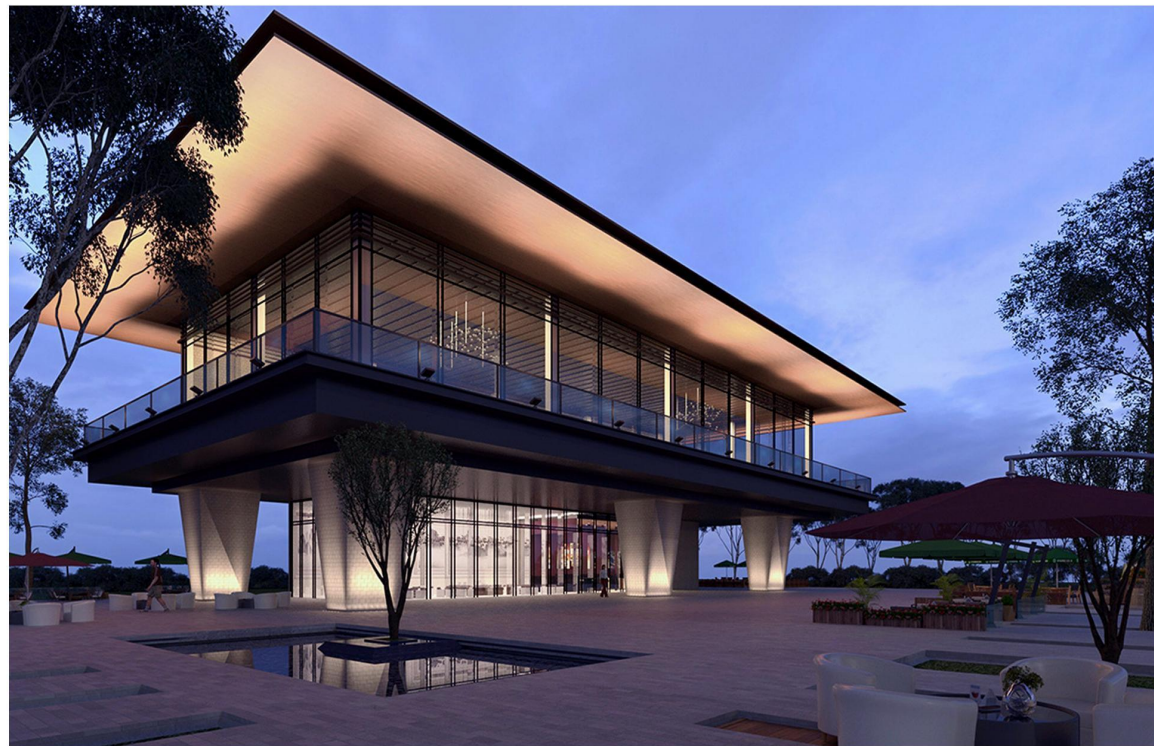



FL-7	CRI/RA	Power/W	Lumens/LM	Voltage/V	Angle/°
3000K/4000K/5000K	80	80W	9336lm	100-240V	70°
3000K/4000K/5000K	80	80W	2760lm	100-240V	28°
3000K/4000K/5000K	80	80W	2656lm	100-240V	19°
3000K/4000K/5000K	80	80W	1920lm	100-240V	9°
3000K/4000K/5000K	80	80W	2512lm	100-240V	6°
3000K/4000K/5000K	80	80W	2744lm	100-240V	7°
3000K/4000K/5000K	80	80W	2584lm	100-240V	11°
3000K/4000K/5000K	80	80W	2035lm	100-240V	29°
3000K/4000K/5000K	80	80W	1936lm	100-240V	22°
3000K/4000K/5000K	80	80W	2176lm	100-240V	16°
3000K/4000K/5000K	80	80W	2112lm	100-240V	10°
3000K/4000K/5000K	80	80W	2112lm	100-240V	12°
3000K/4000K/5000K	80	80W	2216lm	100-240V	23°
3000K/4000K/5000K	80	80W	2024lm	100-240V	15°
3000K/4000K/5000K	80	80W	5424m	100-240V	78°
3000K/4000K/5000K	80	80W	6792lm	100-240V	116°
3000K/4000K/5000K	80	80W	7024lm	100-240V	103°
3000K/4000K/5000K	80	80W	3080lm	100-240V	120°
3000K/4000K/5000K	80	80W	3160lm	100-240V	106°
3000K/4000K/5000K	80	80W	3576lm	100-240V	98°
3000K/4000K/5000K	80	80W	5488lm	100-240V	57°

Flood Light Series




Narrow Beam Angle Flood Light FL-8

- Shell: die casting aluminum, powder coating; customized color
- Cree / Philips chip
- Jinshun control device
- Waterproof grade: IP65
- Application: a wide range of beam angles are available, with a unique optical structure and optical design of ultra-compact cast lamps, beam angles up to 40 to 50 meters, high power, soft and uniform light, and perfect integration with the environment.

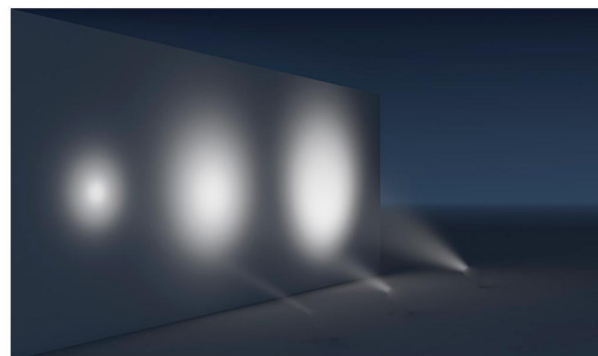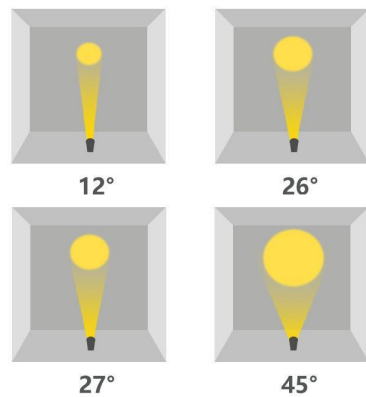

FL-8	CRI/RA	Power/W	Lumens/LM	Voltage/V	Angle/°
3000K/4000K 5000K	80	35W	3209lm	100-240V	27°
3000K/4000K 5000K	80	35W	2763lm	100-240V	45°
3000K/4000K 5000K	80	35W	2618lm	100-240V	26°
3000K/4000K 5000K	80	35W	721lm	100-240V	12°

Flood Light Series

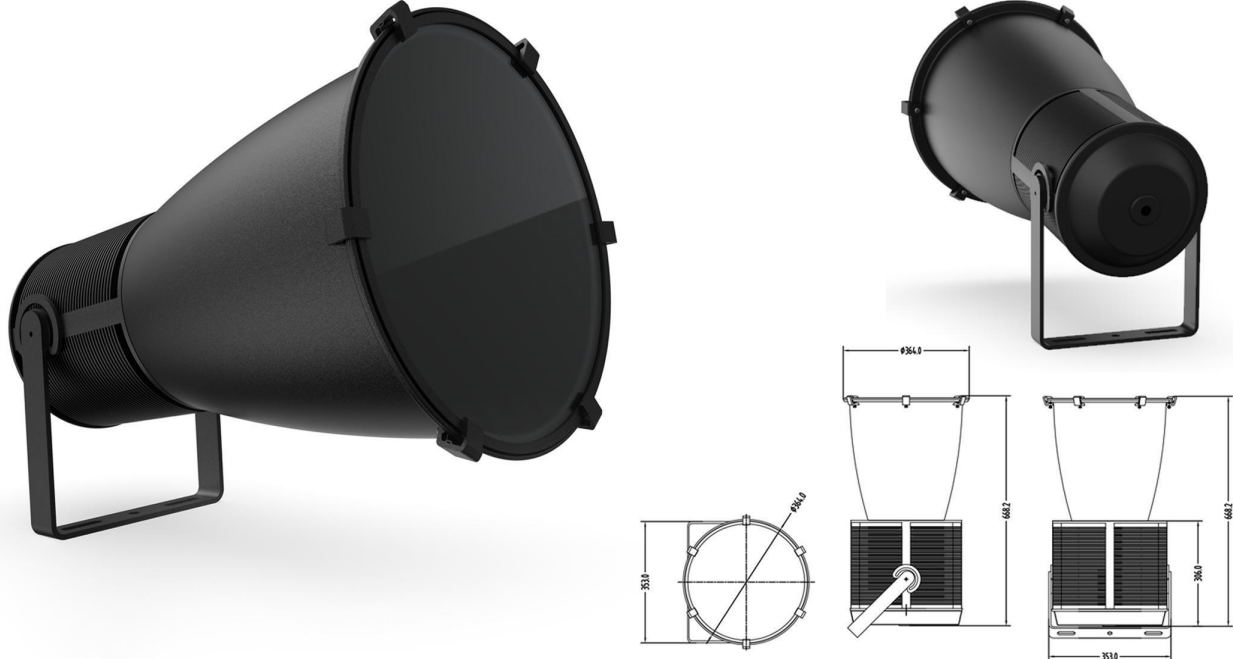


Narrow Beam Spot Light FL-9

- Shell: die casting aluminum, powder coating; customized color
- Cree / Philips chip
- Jinshun control device
- Waterproof grade: IP66
- Application: it widely used for searchlight/accent lighting/bridge lighting/outdoor lighting/architecture lighting/stadium/lighting show/flag lighting e.t.c.




4°

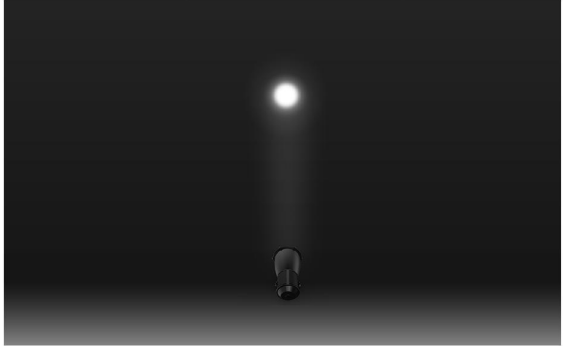

FL-9	CRI/RA	Power/W	Lumens/LM	Voltage/V	Angle/°
3000K/4000K 5000K	80	200W	8298lm	100-240V	4°
3000K/4000K 5000K	80	300W	12457lm	100-240V	4°
3000K/4000K 5000K	80	500W	20745lm	100-240V	4°

地埋系列

In-ground light Series

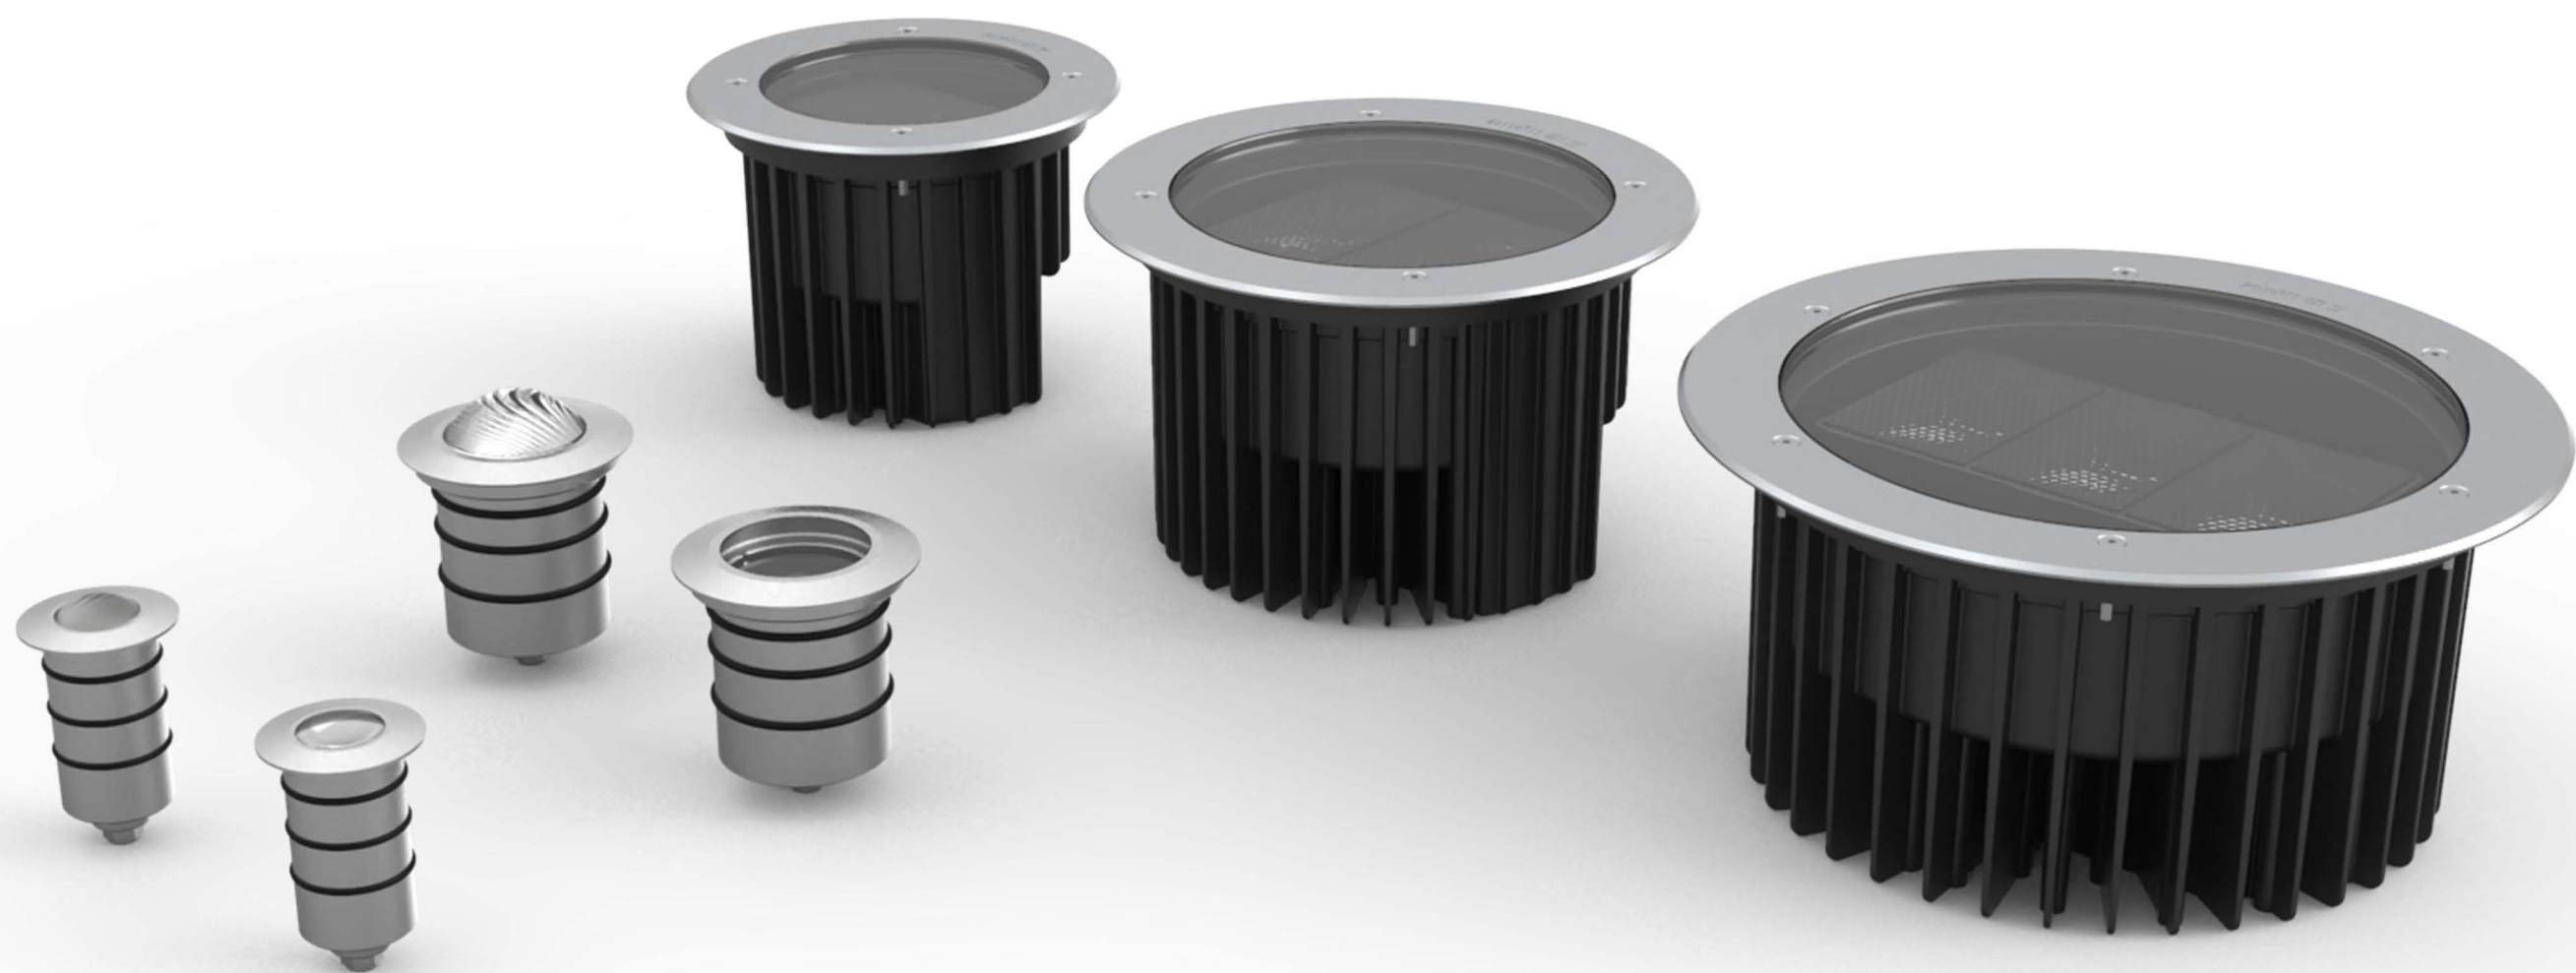



LED

地埋系列/In-ground light Series





地埋灯/In-ground light IG-1

- 外壳: 不锈钢精铸, 粉末涂层; 表面颜色可定制
Shell: Stainless steel precision casting, powder coating; customized color
- 科瑞/飞利浦芯片
Cree / Philips chip
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP68
Waterproof grade: IP68
- 应用: 可作为古建亮化用灯, 木栈道装饰用灯, 泳池用灯, 也适用于绿化带, 公园亮化工程, 草坪, 庭院, 步行街等夜景照明。
It can be used for lighting ancient buildings, wooden plank road, swimming pool, green belt, park lighting, lawn, courtyard, pedestrian street, etc.

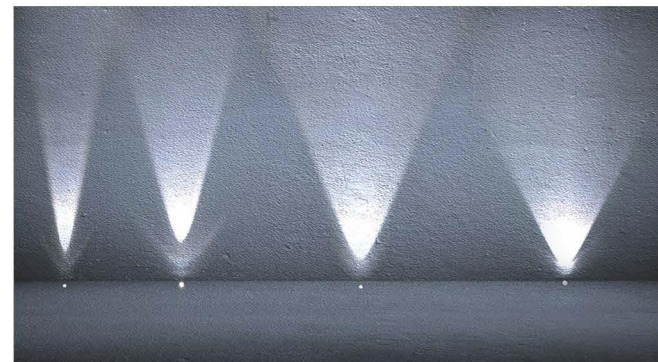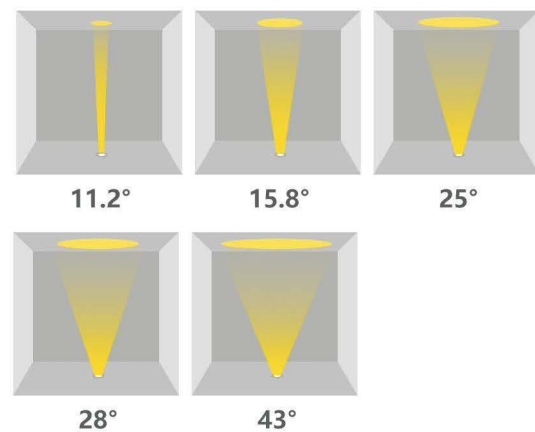



IG-1	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K 5000k	80	2W	52lm	12v/24v	11°
			69lm		12°
			87lm		16°
			39lm		17°
			36lm		23°
			65lm		25°
			35lm		28°
74lm	43°				
单彩色: 红/绿/蓝	80	2W	52lm	12v/24v	11°
			69lm		12°
			87lm		16°
			39lm		17°
			36lm		23°
			65lm		25°
			35lm		28°
74lm	43°				
渐明渐暗 Dimmable	80	2W	52lm	12v/24v	11°
			69lm		12°
			87lm		16°
			39lm		17°
			36lm		23°
			65lm		25°
			35lm		28°
74lm	43°				

地理系列/In-ground light Series

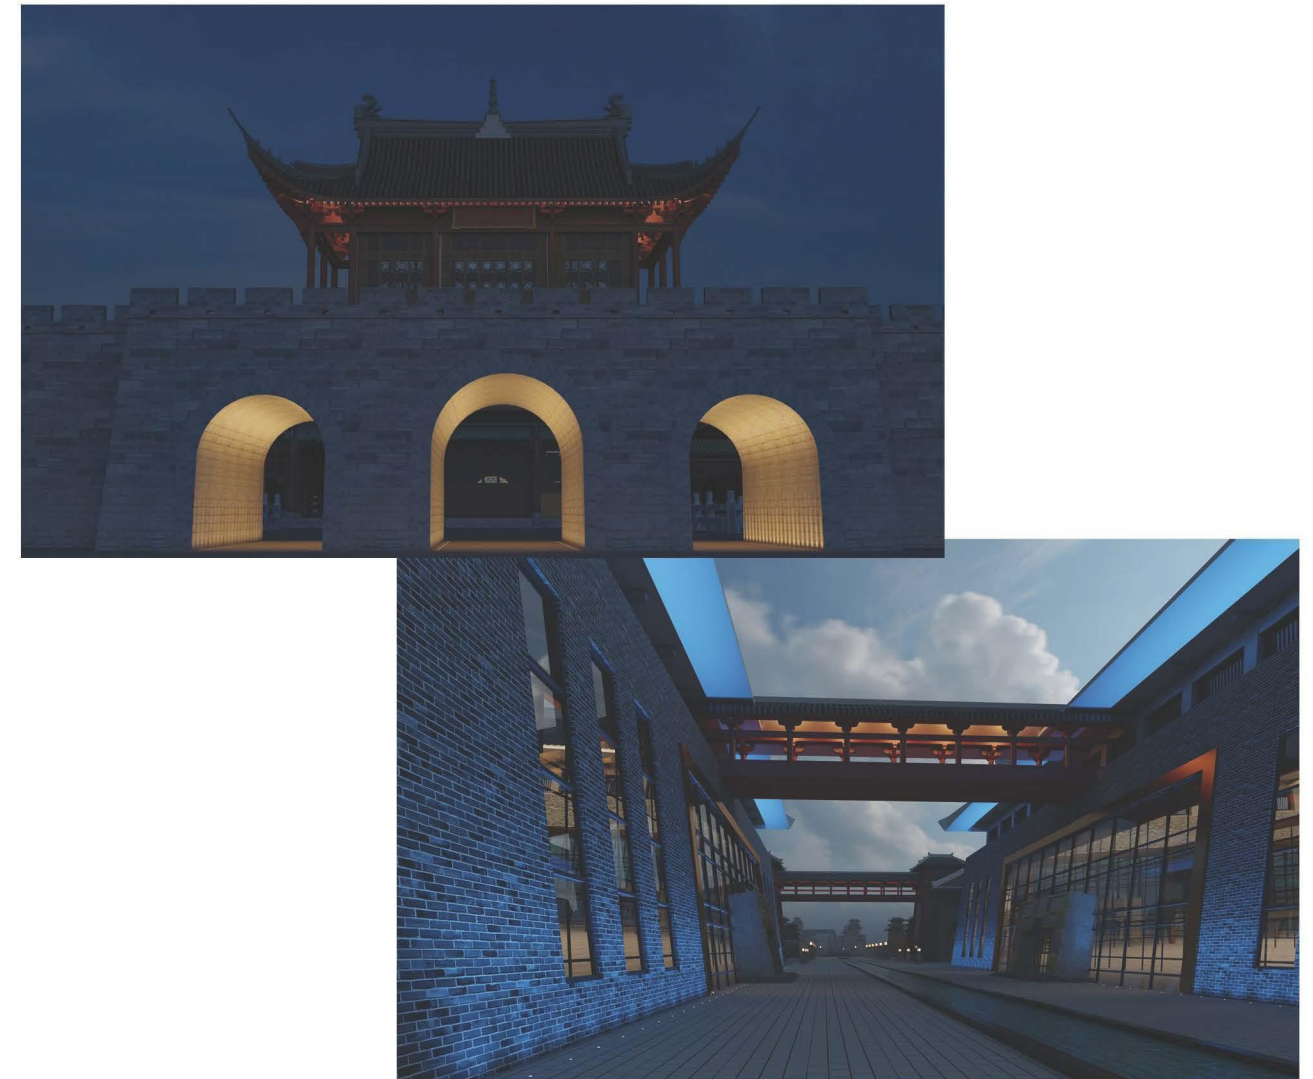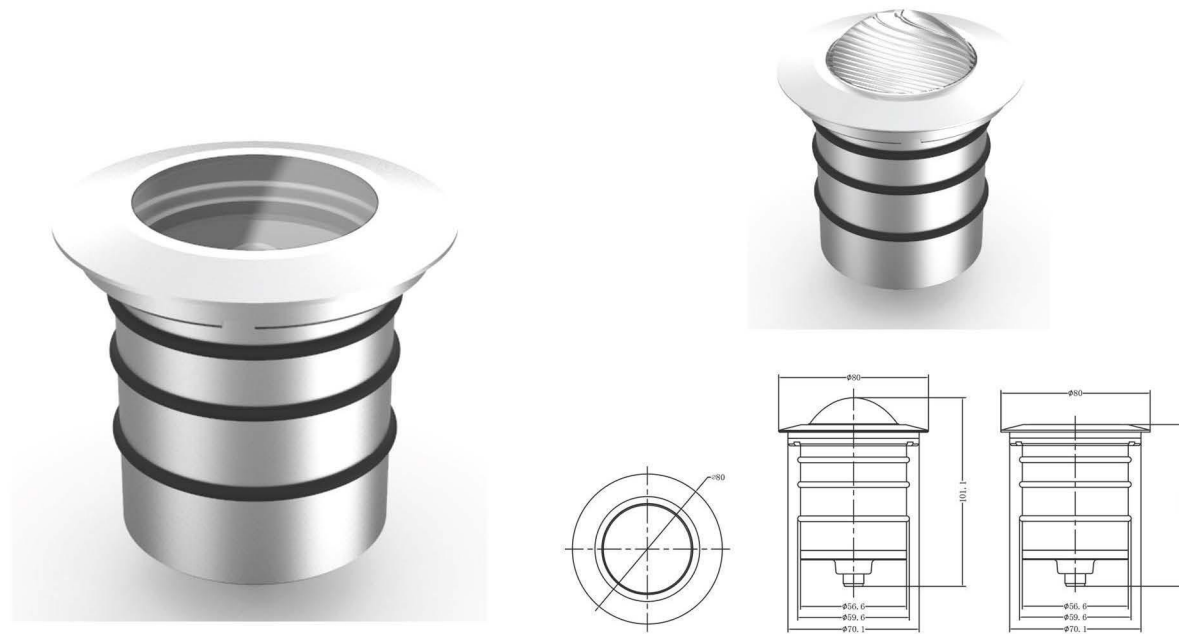

地理灯/In-ground light IG-4

- 外壳: 不锈钢精铸, 粉末涂层; 表面颜色可定制
Shell: Stainless steel precision casting, powder coating; customized color
- 科瑞/飞利浦芯片
Cree / Philips chip
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP66
Waterproof grade: IP66
- 应用: 可作为古建亮化用灯, 木栈道装饰用灯, 也适用于绿化带, 公园亮化工程, 草坪, 庭院, 步行街等夜景照明
It can be used for lighting ancient buildings, wooden plank road, green belt, park lighting, lawn, courtyard, pedestrian street, etc.

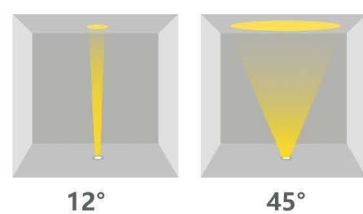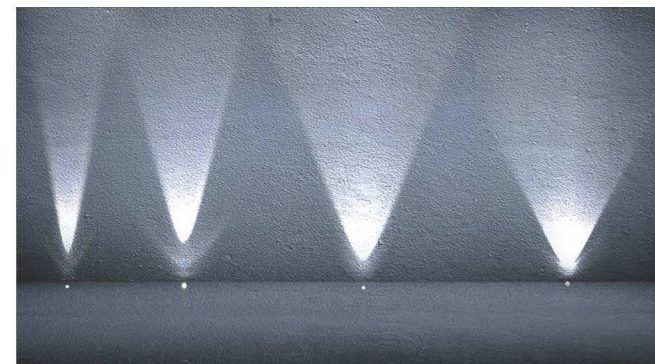



IG-4	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K 5000k	80	6.5W	94lm 410lm	24v	20*45° 12°
RGBW	80	10W		24v	R 27.1° / B 26.6° G 24.8° /W 27.5°
RGBW	80	10W		24v	R38.5° / B 40.5° G41° /W 41.6°

地埋系列/In-ground light Series




地埋灯/In-ground light IG-5

- 外壳: 压铸铝结构和不锈钢精铸面盖的结合, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum construction with stainless steel precision casting face cover, powder coating; customized color
- 科瑞/飞利浦芯片
Cree / Philips chip
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP66
Waterproof grade: IP66
- 应用: 可作为古建亮化用灯, 木栈道装饰用灯, 也适用于绿化带, 公园亮化工程, 草坪, 庭院, 步行街等夜景照明
It can be used for lighting ancient buildings, wooden plank road, green belt, park lighting, lawn, courtyard, pedestrian street, etc.

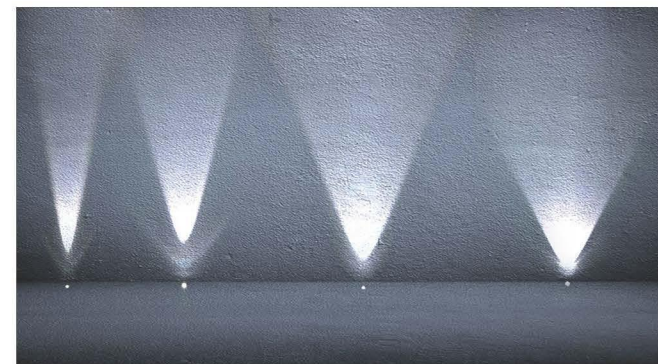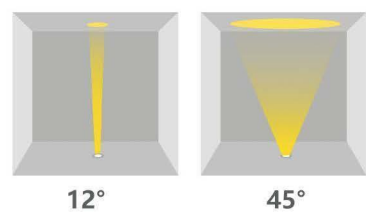



IG-5	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K 5000k	80	10W	94lm 410lm	24v 100-240	20*45° 12°
明暗渐变 Dimmable	80	10W		24v	
RGBW	80	20W		24v	

地埋系列/In-ground light Series

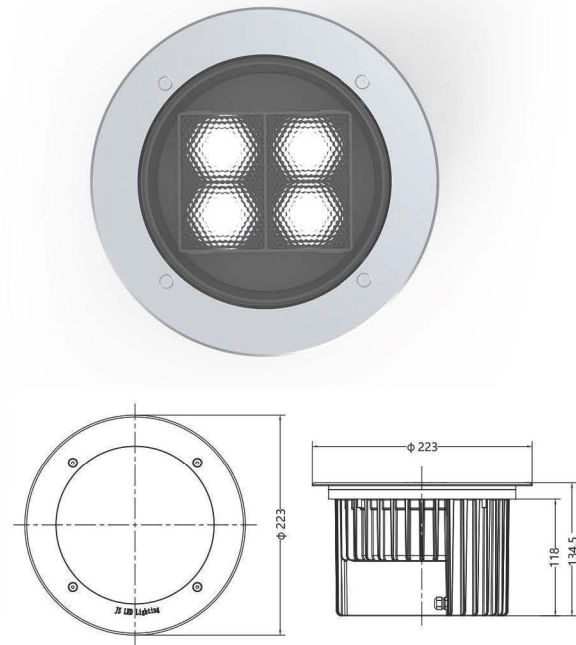


地埋灯/In-ground light IG-6

- 外壳: 压铸铝结构和不锈钢精铸面盖的结合, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum construction with stainless steel precision casting face cover, powder coating; customized color
- 科瑞/飞利浦芯片
Cree / Philips chip
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP66
Waterproof grade: IP66
- 应用: 可作为古建亮化用灯, 木栈道装饰用灯, 也适用于绿化带, 公园亮化工程, 草坪, 庭院, 步行街等夜景照明
It can be used for lighting ancient buildings, wooden plank road, green belt, park lighting, lawn, courtyard, pedestrian street, etc.

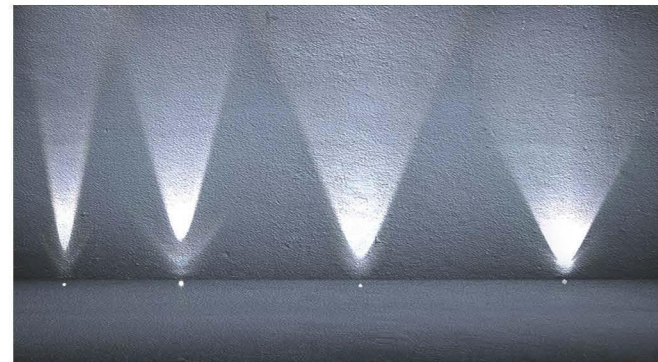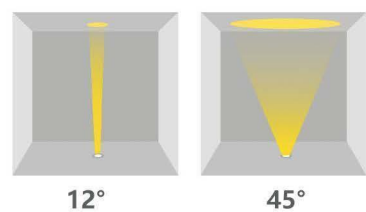





IG-6	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K 5000k	80	20W	94lm 410lm	24v 100-240	20*45° 12°
渐明渐暗 Dimmable	80	20W		24v	
RGBW	80	40W		24v	

地埋系列/In-ground light Series

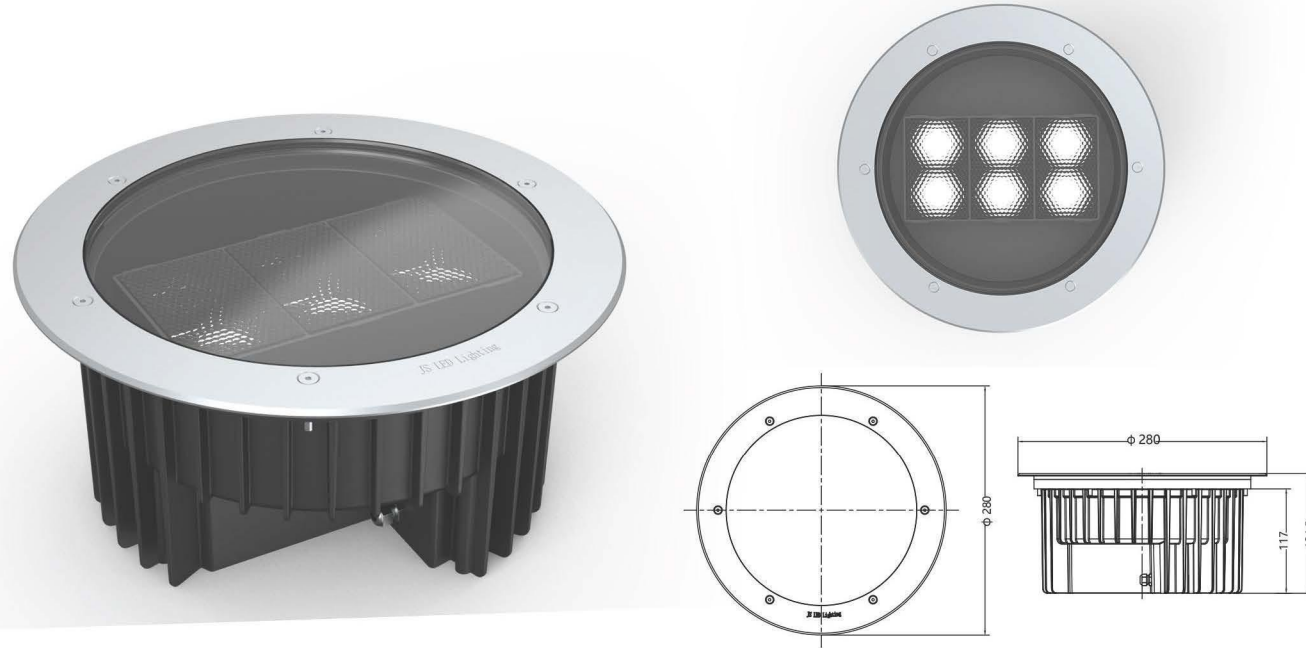

地埋灯/In-ground light IG-7

- 外壳：压铸铝结构和不锈钢精铸面盖的结合，粉末涂层；表面颜色可定制
Shell: die casting aluminum construction with stainless steel precision casting face cover, powder coating; customized color
- 科瑞/飞利浦芯片
Cree / Philips chip
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级：IP66
Waterproof grade: IP66
- 应用：可作为古建亮化用灯，木栈道装饰用灯，也适用于绿化带，公园亮化工程，草坪，庭院，步行街等夜景照明
It can be used for lighting ancient buildings, wooden plank road, green belt, park lighting, lawn, courtyard, pedestrian street, etc.

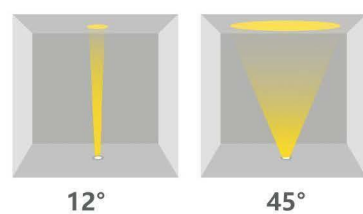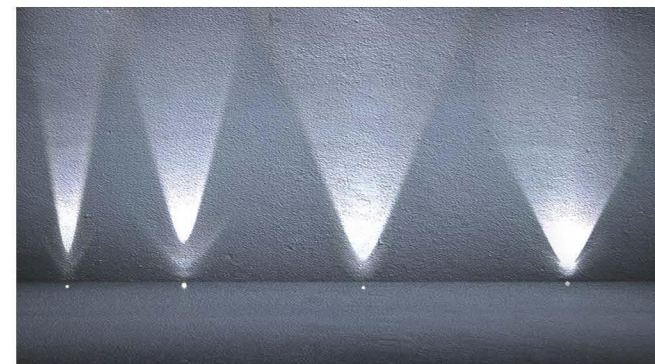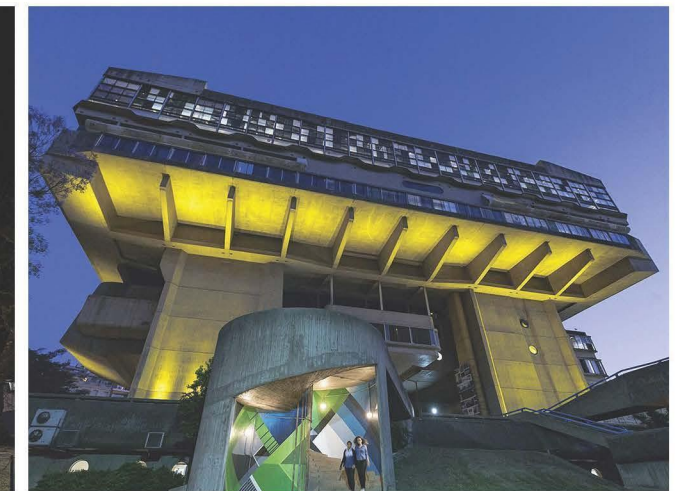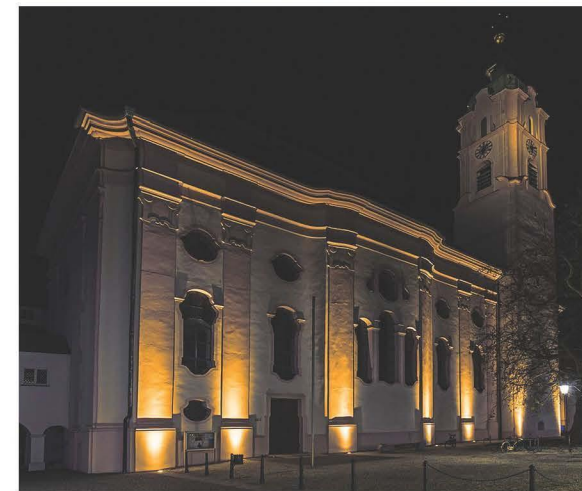

IG-7	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K 5000k	80	40W	94lm 410lm	24v	20*45° 12°
渐明渐暗 Dimmable	80	40W		24v	
RGBW	80	60W		24v	



庭院系列

Courtyard light Series



LED

庭院系列/Courtyard light Series

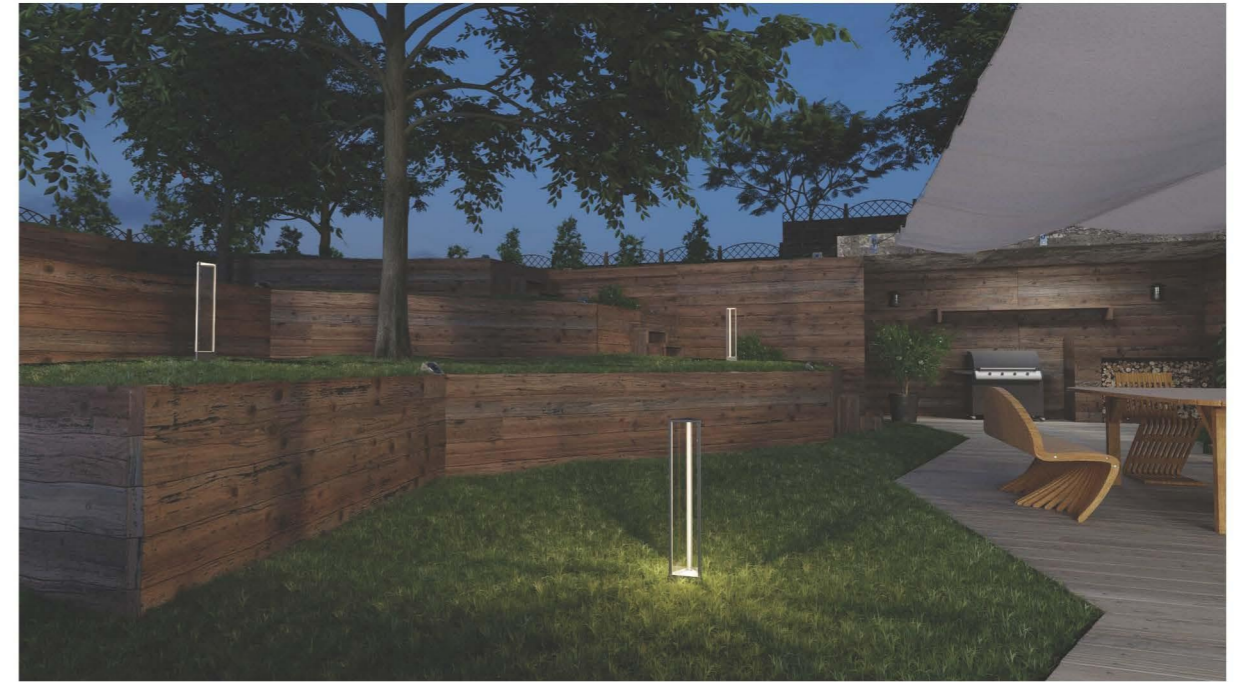
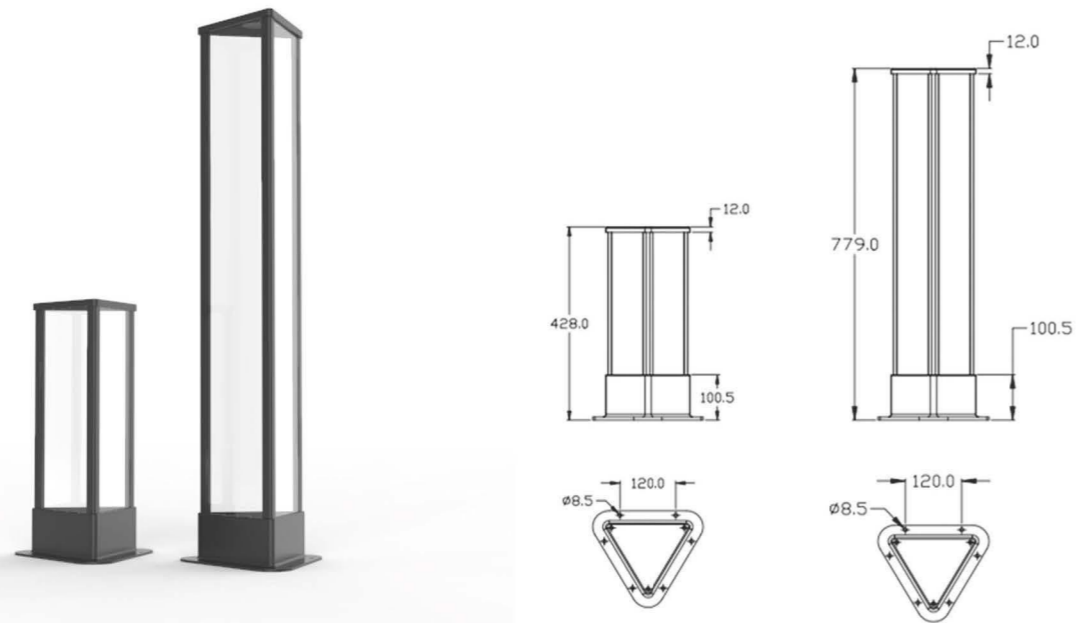


三角草坪灯/Triangular Lawn Light LL-1


- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞/飞利浦芯片
Cree / Philips chip
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP65
Waterproof grade: IP65
- 应用: 三面出光, 每个方向 60 度反射阴影, 适用于草坪、庭院等环境景观照明
three directions, each direction is 60 degrees reflecting the shadow, suitable for lawn, courtyard and other environmental landscape lighting



LL-1	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K 5000k	80	25W	1332lm	110-277v	360°

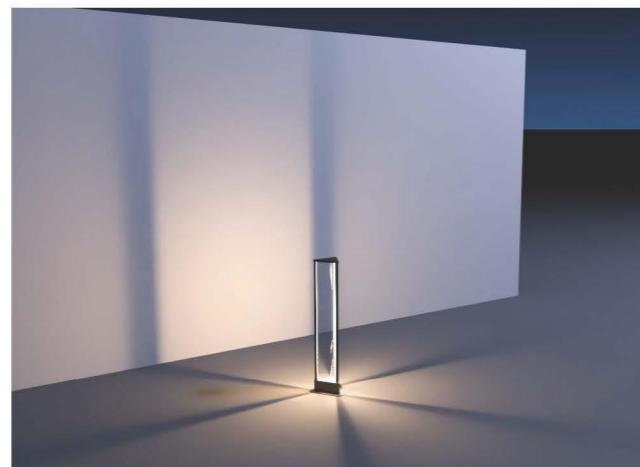

庭院系列/Courtyard light Series

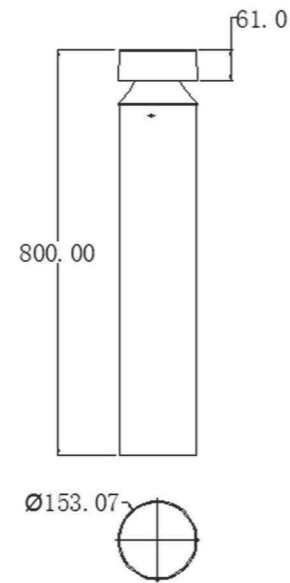


圆柱草坪灯/Cylindrical Lawn Light LL-9


- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞/飞利浦芯片
Cree / Philips chip
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP65
Waterproof grade: IP65
- 应用: 采用环形透镜的创新光学系统, 在视觉上将室外的路径和广场连接起来, 180°对齐的光分布可用于路径, 360°的光分布可用于广场等开放区域。光斑均匀, 无眩光。
An innovative optical system with ring lenses visually connects outdoor paths to squares, with 180-degree aligned light distributions available for paths and 360-degree light distributions for open areas such as squares. The spot is uniform and glare-free.




LL-9	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K 5000k	80	18W	446lm	110-277v	360°



360°

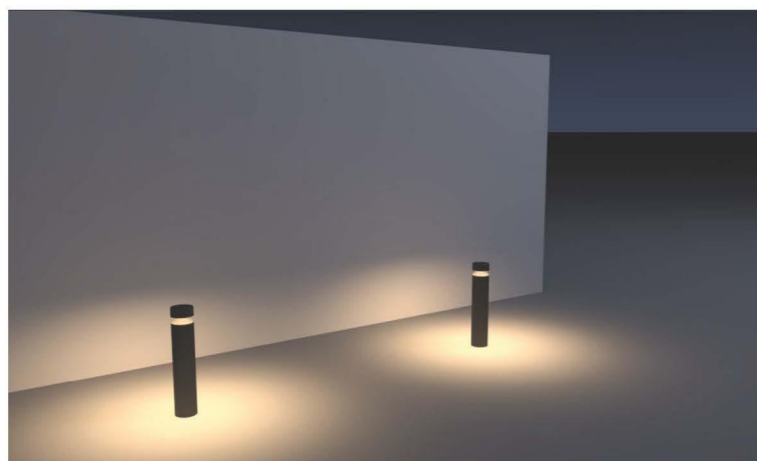

庭院系列/Courtyard light Series

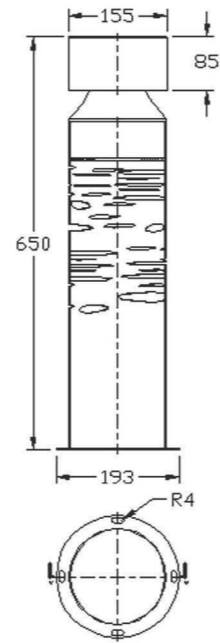


水纹草坪灯/Water Ripple Lawn Light LL-10


- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- SMD 2835/西铁城028
SMD 2835 / Xitiecheng028
- 金顺
Jinshun
- 防水等级: IP65
Waterproof grade: IP65
- 应用: 造型新颖, 镂空的花纹, 上下出光, 光线像荡漾的水波纹, 为单调的道路增添了别样的韵味。
The luminaires have novel shapes, hollow patterns, up and down the light, and the light is like ripples of water, adding a different charm to the monotonous road.



LL-10	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K 5000k	80	上↑:20W 下↓:12W	上↑:524lm 下↓:298lm	110-277v	上↑:60° 下↓:360°

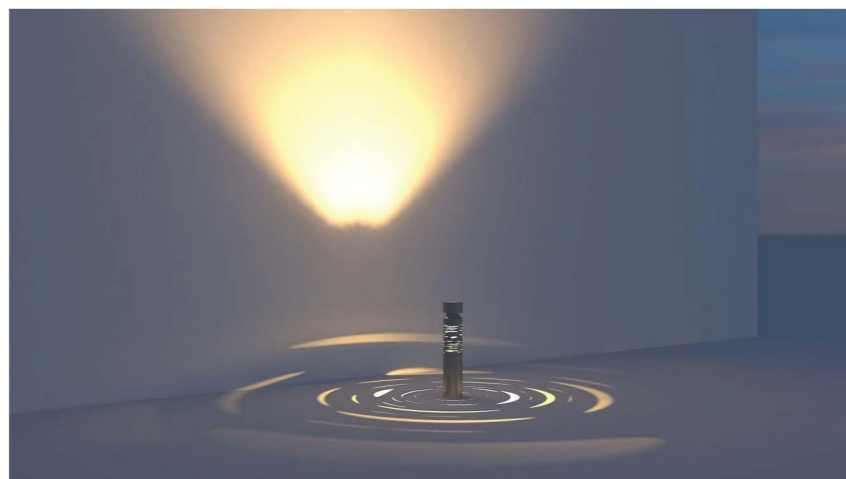

庭院系列/Courtyard light Series

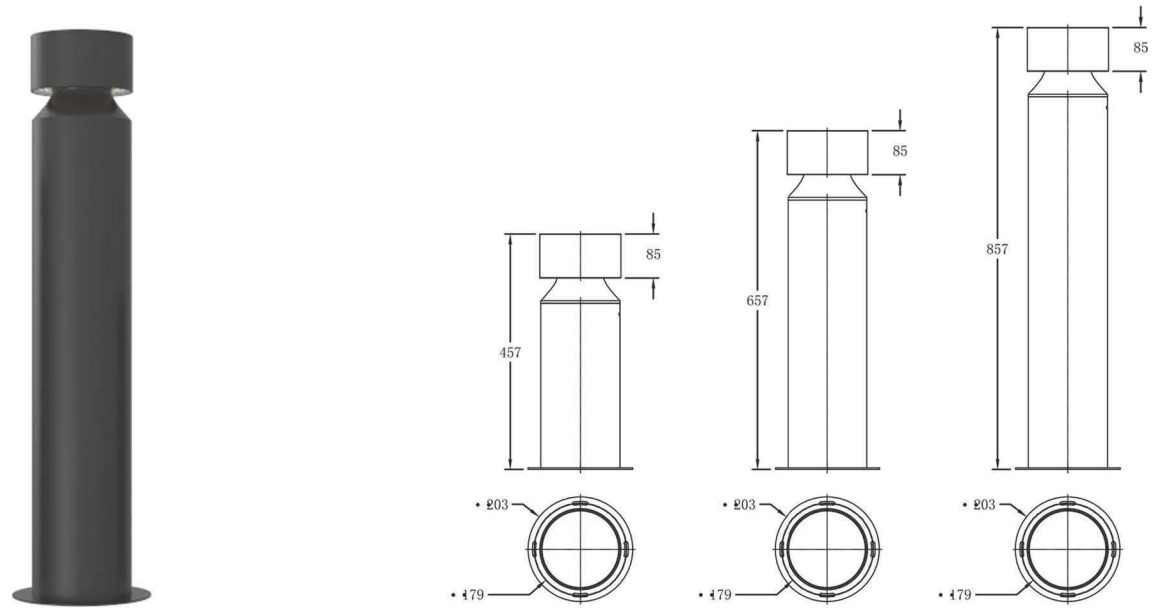


上下出光草坪灯/Up and Down Lawn Light LL-11

- 外壳: 压铸铝, 粉末涂层; 表面颜色可定制
Shell: die casting aluminum, powder coating; customized color
- 科瑞/飞利浦芯片
Cree / Philips chip
- 金顺 /DMX512 控制装置
Jinshun / DMX512 control device
- 防水等级: IP65
Waterproof grade: IP65
- 应用: 在圆形草坪灯的基础上, 采用上下双出光的新模式, 出光均匀, 无眩光。上出光可用于小路径, 下出光可用于广场等开放区域, 同时出光洗亮周围环境, 营造整体的氛围感。
On the basis of the circular lawn light, a new mode of up and down double light is adopted, with uniform light and no glare. Up light can be used for small paths, downlight can be used for squares and other open areas, while light washes the surrounding environment, creating a sense of overall atmosphere.



LL-11	显指/RA	功率/W	流明值/LM	电压/V	角度/°
3000K/4000K 5000k	80	上:20W 下:12W	上:524lm 下:298lm	110-277v	360°



48°/360°

