



**Arasvet**  
WHERE THE LIGHT IS, IT IS THE FOCAL POINT

SAFE AND COMFORTABLE RESTORATION



- Ra-97, Высокий уровень цветопередачи
- Компактная конструкция, высокое качество и деликатность.
- Корпус лампы из алюминиевого сплава
- Анти-бликовая решётка
- Мягкое и комфортное освещение
- Профессиональная оптическая линза, эффективное рассеивание тепла, мягкий световой поток

Track	Surface	Embedded	Magnetic Track

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Zoom-Bell-07W	7W	≥450lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming	3000K 4000K 6000K	6-50 degree	White Black	 honeycomb

• **Функционал:** Идеально для ресторанного и акцентного освещения






- Ra  $\geq$  97, The higher color rendering index, the more natural the product will be displayed
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface	Embedded	Magnetic Track

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Bell-10 W	10W	$\geq$ 600lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming DALI dimming	3000K 4000K 6000K	6-50 degree	White Black	 honeycomb

- Application: Best- suited for dining areas such as restaurant,lounge

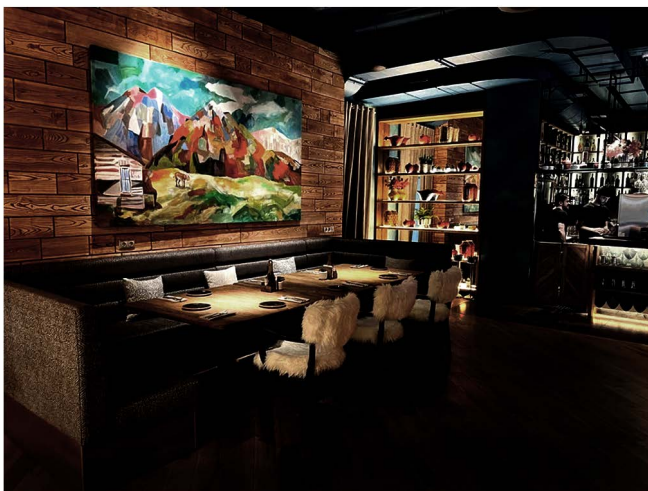



- 3 degree small angle spotlight
- Ra  $\geq$  97, The higher color rendering index, the more natural the product will be displayed
- Aluminum alloy lamp body
- High altitude small angle lighting
- Anti glare
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface	Embedded	Magnetic Track

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Bell-10-X	10W	$\geq$ 600lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming DALI dimming	3000K 4000K 6000K	3-24 degree	White Black	 honeycomb

- Application: Most suitable for restaurants, high-altitude small angle lighting






- Ra  $\geq$  97, The higher color rendering index, the more natural the product will be displayed
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface	Embedded	Magnetic Track

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Bell-9	9W	$\geq$ 540lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming	3000K 4000K 6000K	9-40 degree	White Black	no

- Application scenarios: art galleries, tea spaces, shopping malls, etc.

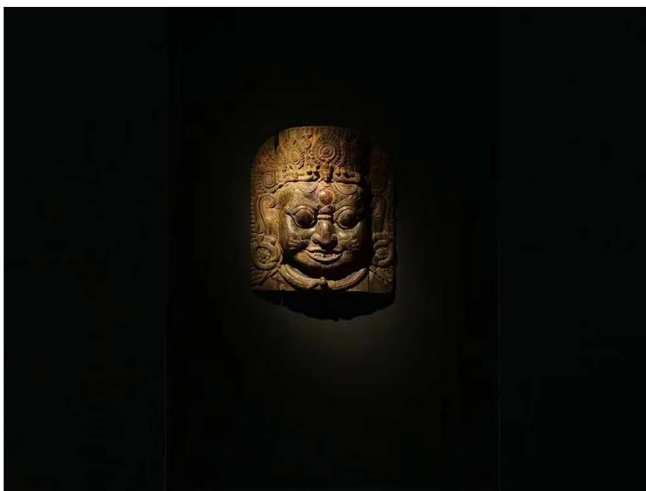




- Ra  $\geq$  97, The higher color rendering index, the more natural the product will be displayed
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface	Embedded	Magnetic Track

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
-Foc-12	12W	$\geq$ 794lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming 0-10V Local dimming DALI dimming	3000K 4000K 6000K	10-60 degree	White Black	 honeycomb

- Application scenarios: art galleries, tea spaces, shopping malls, etc.

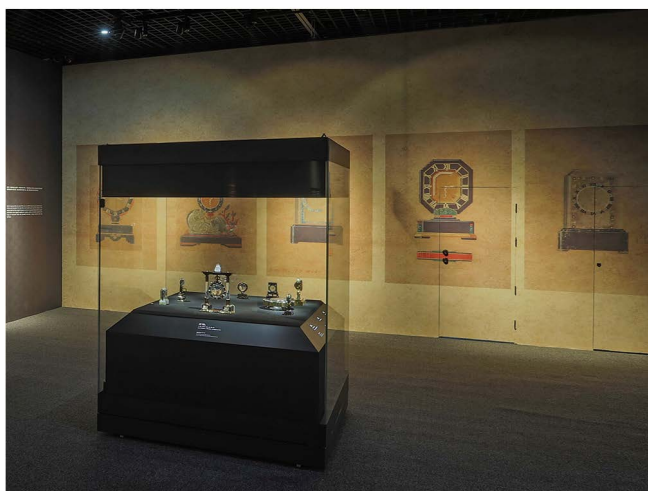




- Ra  $\geq$  97, The higher color rendering index, the more natural the product will be displayed
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface	Embedded	Magnetic Track

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Cam-5/7	5W 7W	$\geq$ 300lm $\geq$ 420lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming	3000K 4000K 6000K	10-40 degree	White Black	 honeycomb

- Application scenarios: art galleries, tea spaces, shopping malls, etc.

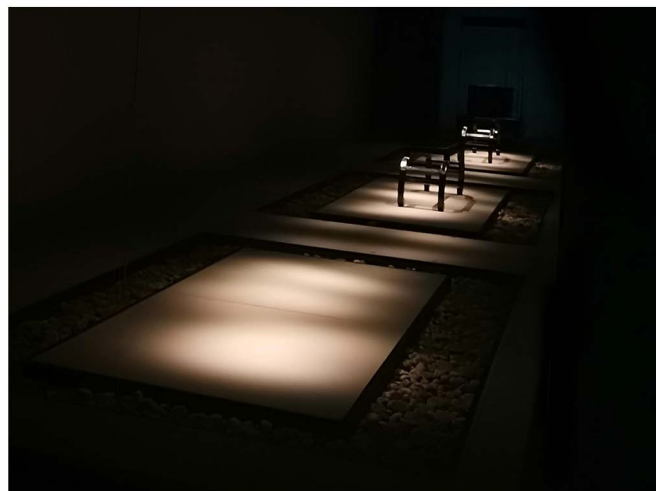




- Ra  $\geq$  97, The higher color rendering index, the more natural the product will be displayed
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- patented product
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Cam-20/24	20W	$\geq$ 1600lm	Track	non dimming	3000K	12-60 degree	White	 honeycomb
	24W	$\geq$ 1920lm	Surface	220V Triac dimming	4000K 6000K		Black	

- Application scenarios: art galleries, museums, etc.

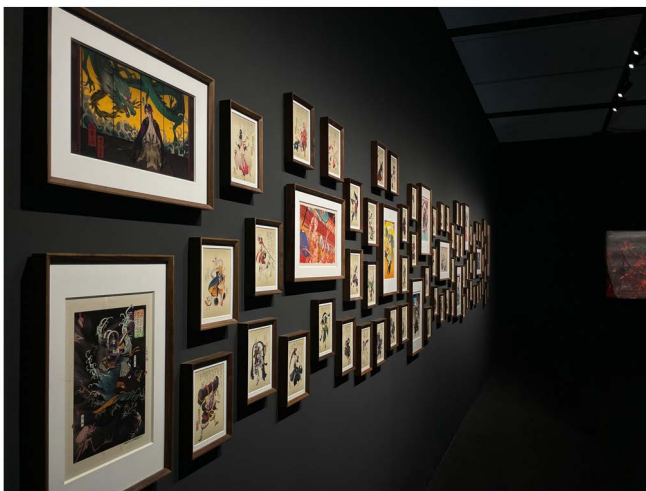



- Ra  $\geq$  93, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Usage scenario: museums, high-altitude lighting
- 15-60 degree zoom

Track	Surface


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Zoom-Bok	24W	$\geq$ 2160lm	Track Surface	non dimming	3000K	15-60 degree	Black	no
	35W	$\geq$ 3250lm		220V Triac dimming	4000K			
	45W	$\geq$ 4050lm		0-10V Local dimming DALI dimming	6000K			

- Application scenarios: exhibitions, museums, high-altitude lighting






- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
ChikPik-5	5W	$\geq$ 300lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming	3000K 4000K 6000K	10-42 degree	White Black	 honeycomb


- Application scenarios: Decorative clothing lighting, wall lighting, and key lighting.

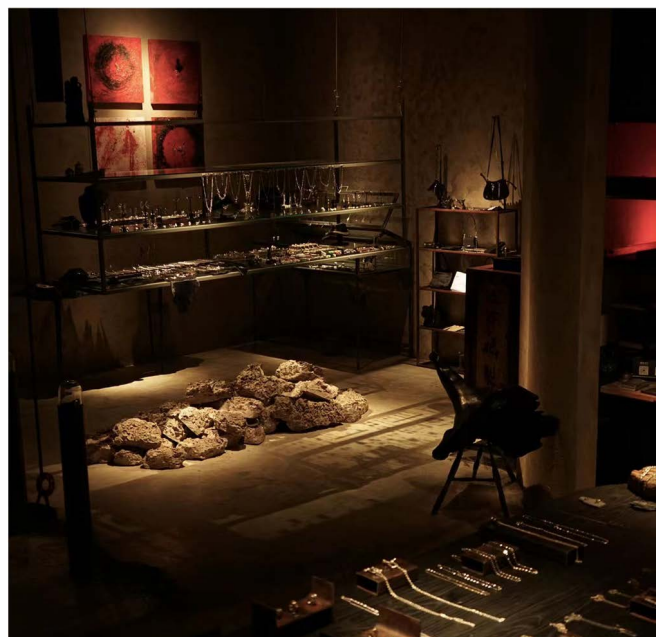




- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
ChikPik	7W 10W	$\geq$ 420lm $\geq$ 600lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming	3000K 4000K 6000K	15-45 degree	White Black	 honeycomb

- Application scenarios: Decorative clothing lighting, wall lighting, and key lighting.

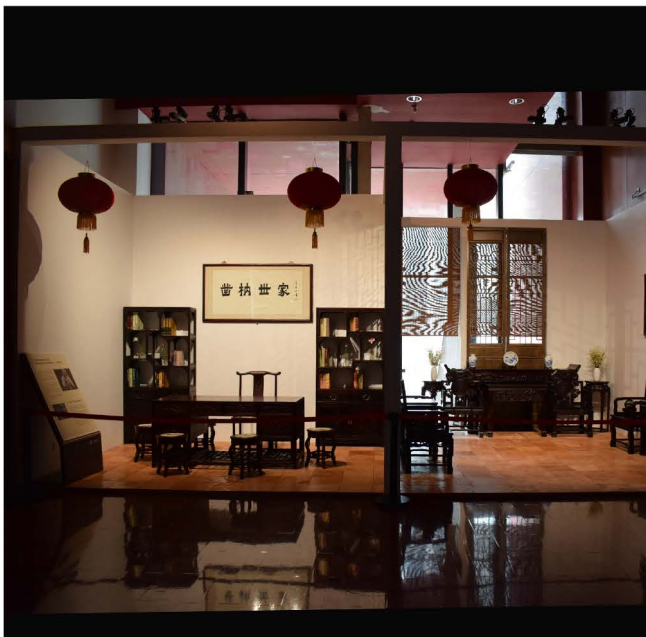





- Ra  $\geq$  97, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Rotate 355 degrees horizontally and swing 90 degrees vertically

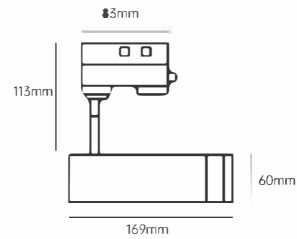

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Zoom-Fit-15W	15W	$\geq$ 900lm	track	non dimming	3000K	12-50 degree	Black	 honeycomb
	18W	$\geq$ 1080lm	surface mount	220V Triac dimming DALI dimming	4000K 6000K			

- Application scenarios: layout, painting, sculpture.

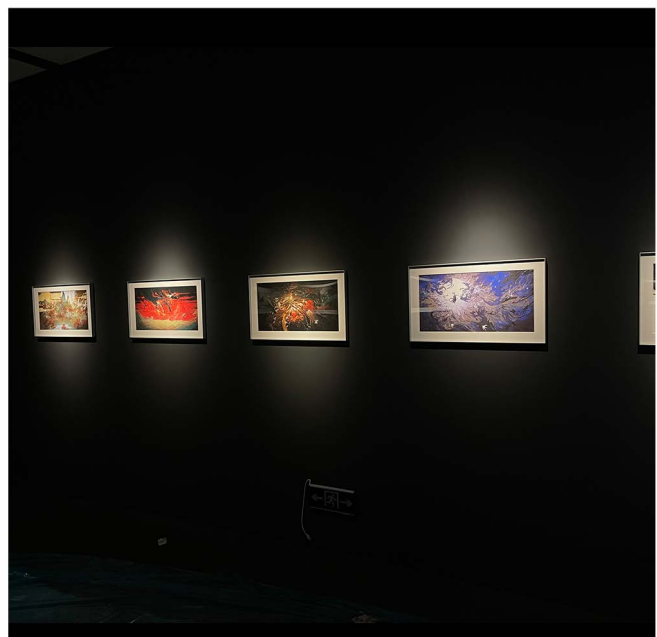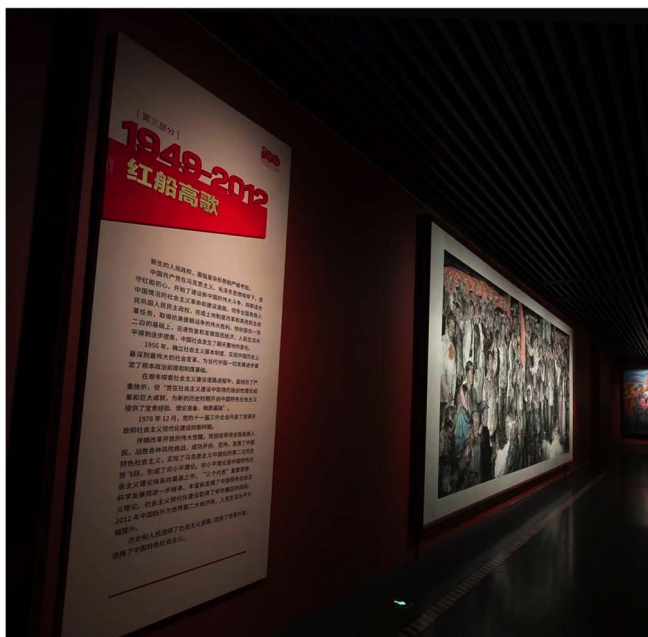





- Ra  $\geq$  97, The higher color rendering index, the more natural the product will be displayed
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface	Embedded	Magnetic Track


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Zoom-Cub 118	18W	$\geq$ 1080lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming 0-10V Local dimming DALI dimming	2700K 3000K 4000K 6000K	15-45 degree	White Black	 honeycomb Lamp blinds


- Application scenarios: art galleries, tea spaces, shopping malls, etc.

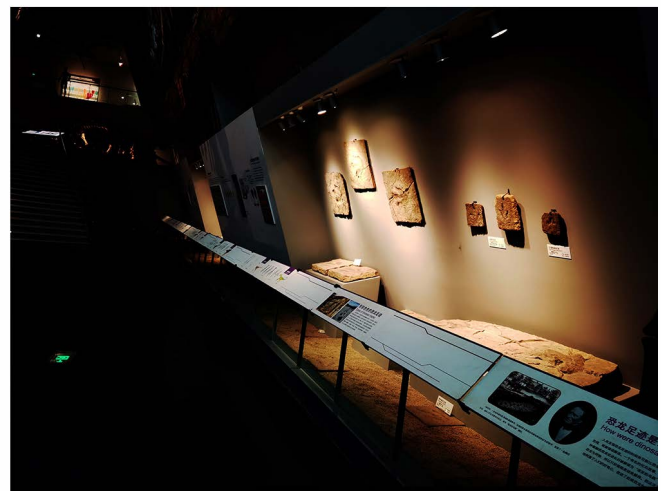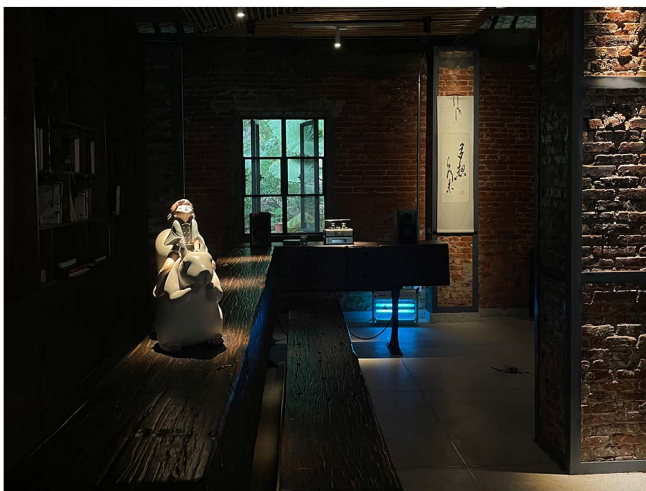





- Ra  $\geq$  97, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Rotate 355 degrees horizontally and swing 90 degrees vertically.

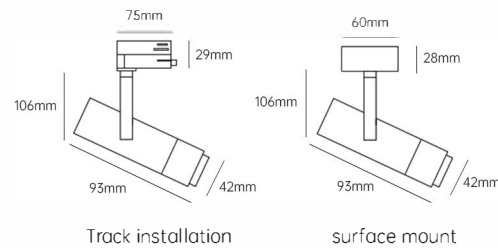


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Push-7W	5W 7W	$\geq$ 350lm $\geq$ 490lm	Track surface mount	non dimming 220V Triac dimming 0-10V dimming DALI dimming	3000K 4000K 6000K	9-60 degree	White Black	 honeycomb


• Application scenarios: layout, painting, sculpture.

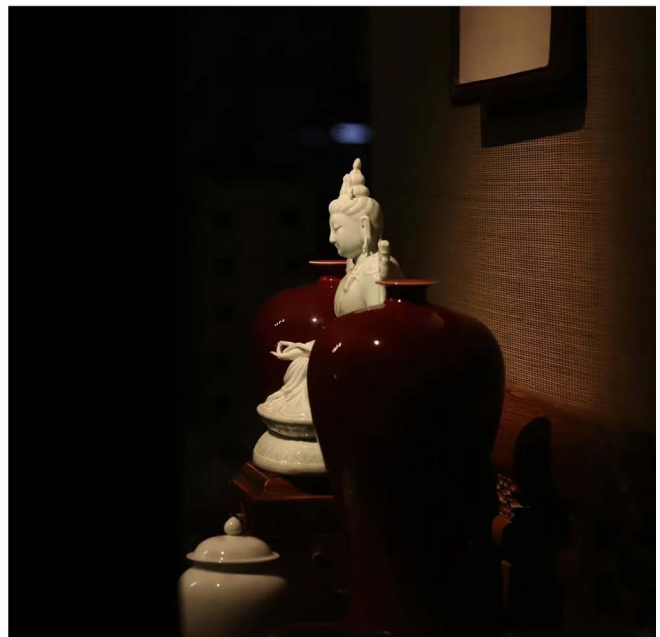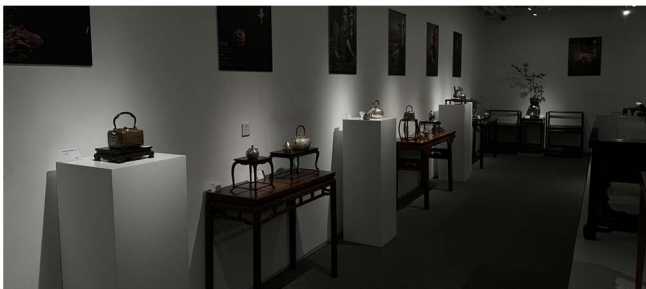




- Ra  $\geq$  97, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Rotate 355 degrees horizontally and swing 90 degrees vertically.

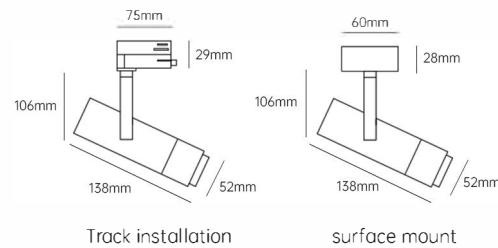


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Puch -12W	9W 12W	$\geq$ 600lm $\geq$ 800lm	Track surface mount	non dimming 220V Triac dimming 0-10V dimming DALI dimming	3000K 4000K 6000K	9-60 degree	White Black	 anti-dazzling screen   honeycomb

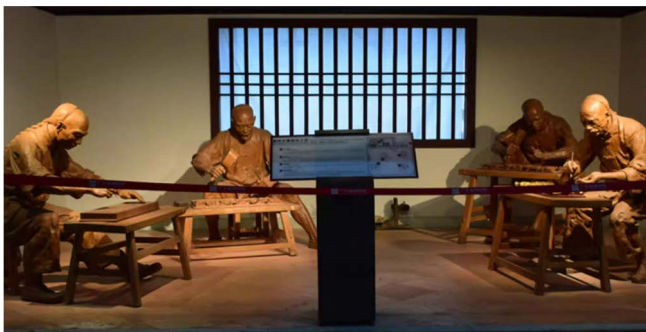

- Application scenarios: layout, painting, sculpture.



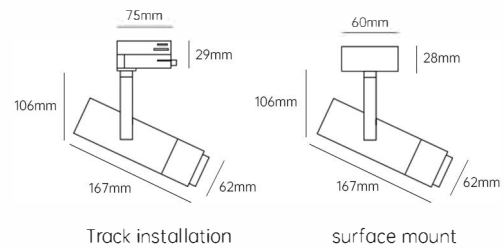

- Ra  $\geq$  97, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Rotate 355 degrees horizontally and swing 90 degrees vertically.




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Push	15W	$\geq$ 1070lm	Track surface mount	non dimming 220V Triac dimming 0-10V dimming DALI dimming	3000K 4000K 6000K	9-60 degree	White Black	 anti-dazzling screen   honeycomb



- Application scenarios: layout, painting, sculpture.



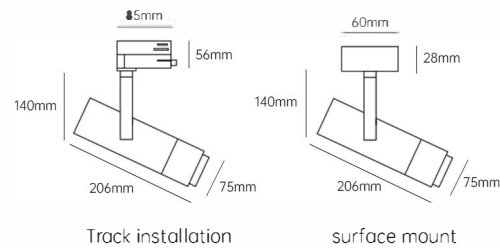

- Ra  $\geq$  97, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Rotate 355 degrees horizontally and swing 90 degrees vertically.



Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Push	18W 24W	$\geq$ 1350lm $\geq$ 1800lm	Track surface mount	non dimming 220V Triac dimming 0-10V dimming DALI dimming	3000K 4000K 6000K	9-60 degree	White Black	 anti-dazzling screen   honeycomb

- Application scenarios: layout, painting, sculpture.








- Ra  $\geq$  92, The higher color rendering index, the more natural the product will be displayed
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface	Embedded	Magnetic Track

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Sola	5W 7W	$\geq$ 300lm $\geq$ 420lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming	3000K 4000K 6000K	15 Degree	White Black	 honeycomb

- Application scenarios: art galleries, tea spaces, shopping malls, etc.

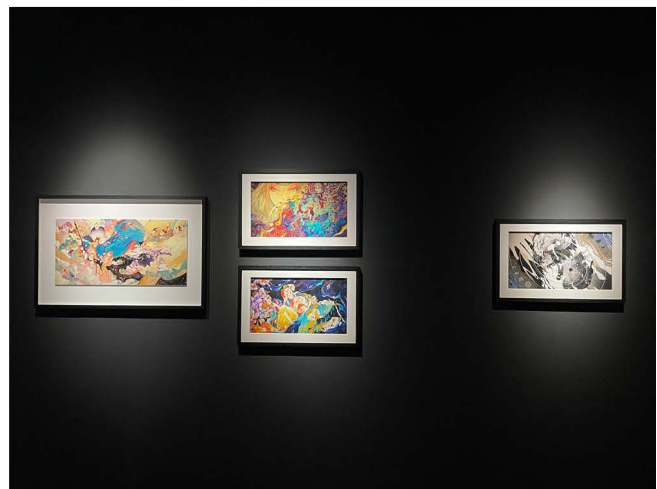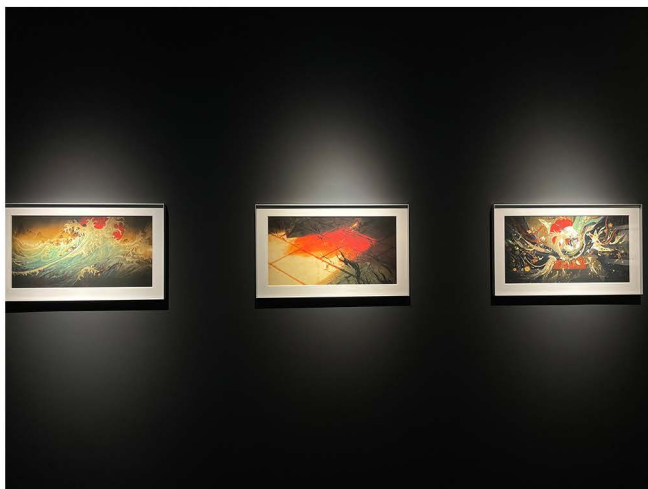

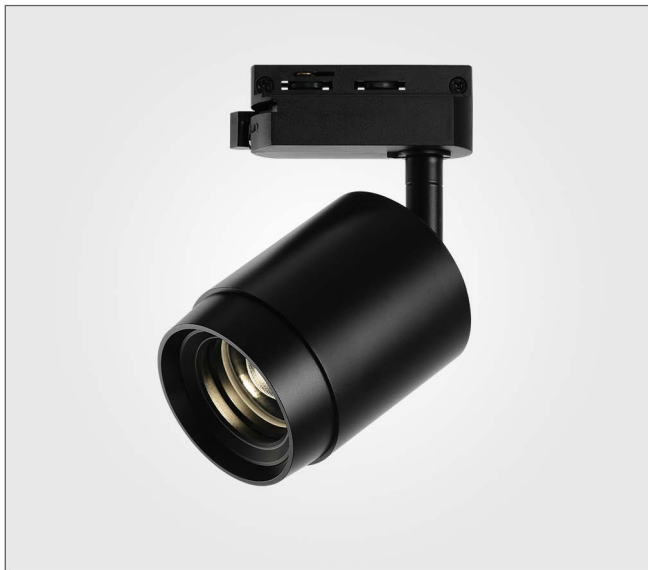


- Ra  $\geq$  93, The higher color rendering index, the more natural the product will be displayed
- 9-60 degree beam angle zoom
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface	Embedded	Magnetic Track


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
<b>Sola</b>	9W 12W	$\geq$ 720lm $\geq$ 900lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming	3000K 4000K 6000K	9-60 degree	Black	 honeycomb

- Application scenarios: art galleries, tea spaces, shopping malls, etc.

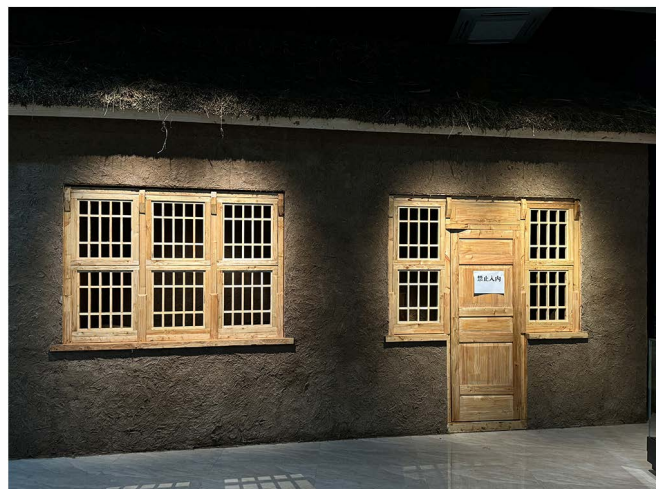




- Ra  $\geq$  97, The higher color rendering index, the more natural the product will be displayed
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury
- Professional optical lens, efficient heat dissipation, soft and comfortable

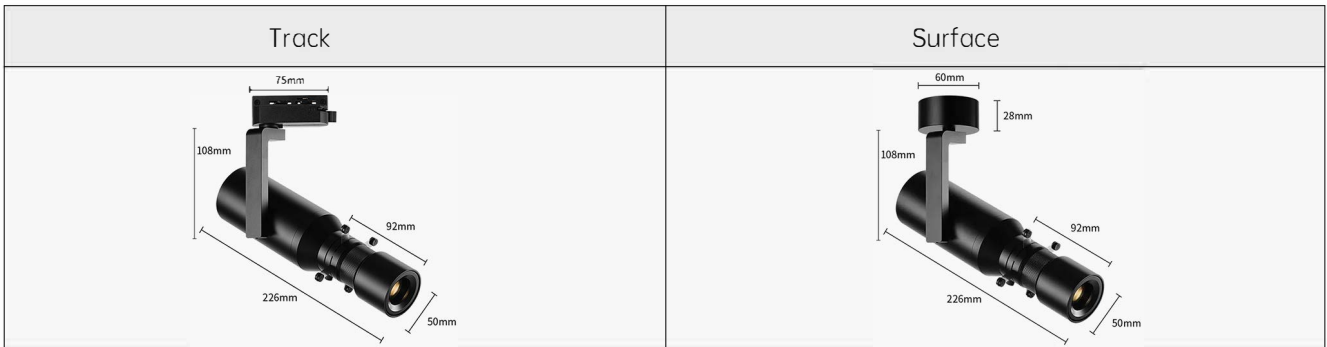


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Gallery	15W 18W	$\geq$ 900lm $\geq$ 1080lm	Track Surface	non dimming 220V Triac dimming 0-10V Local dimming DALI dimming	3000K 4000K 6000K	24-42 degree (Shapeable)	White Black	no

- Application scenarios: exhibition halls, calligraphy and painting, printmaking, etc.

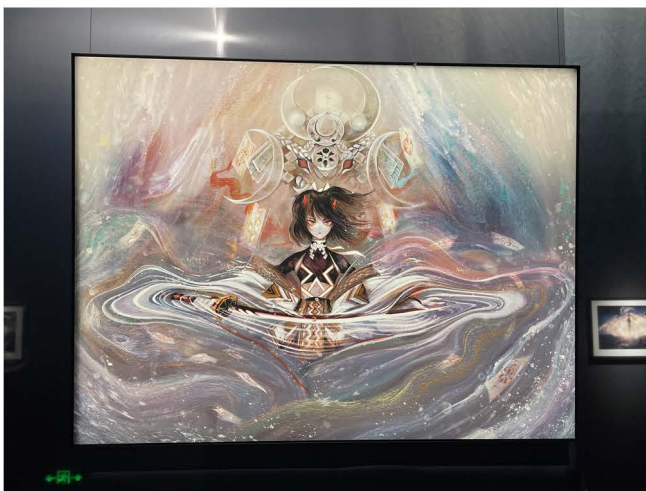




- Ra  $\geq$  95, The higher color rendering index, the more natural the product will be displayed
- Spot illumination ratio up to 1:0.8
- No blue edge when emitting light
- Soft and comfortable lighting
- Large wattage irradiation
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface
	

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Gallery-30W	24W 30W	$\geq$ 1440lm $\geq$ 1880lm	Track Surface	non dimming 220V Triac dimming 0-10V Local dimming DALI dimming	3000K 4000K 6000K	Spot shape 1:0.8	White Black	no

- Application scenarios: exhibition halls, calligraphy and painting, printmaking, etc.

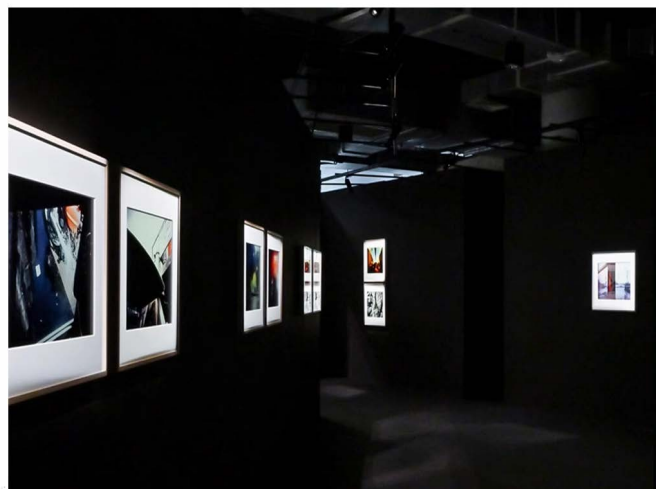




- Ra  $\geq$  94, The higher color rendering index, the more natural the product will be displayed
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Evening Sunshine
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface	Embedded	Magnetic Track

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
BELL-Y	7W	$\geq$ 420lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming	model A model B model C model D	6-50 degree	White Black	

- Application scenarios: internet red light, Qingba, indoor atmosphere.

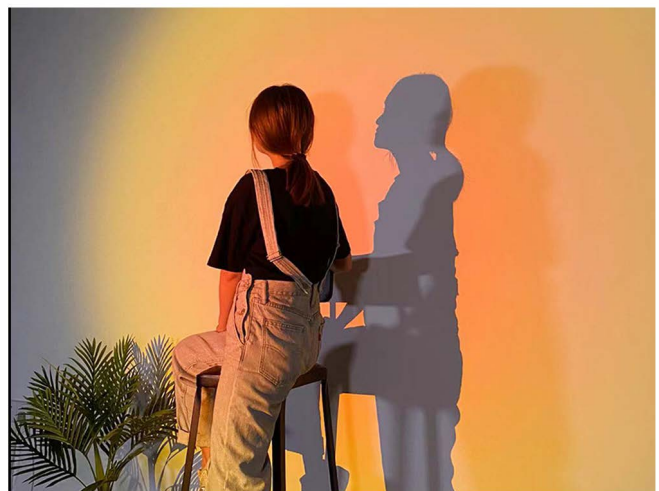



- Ra  $\geq$  94, The higher color rendering index, the more natural the product will be displayed
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Evening Sunshine
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface	Embedded	Magnetic Track


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
GSWY 0067	10W	$\geq$ 600lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming	model A model B model C model D	6-50 degree	White Black	

- Application scenarios: internet red light, Qingba, indoor atmosphere.







- Ra  $\geq$  97, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury

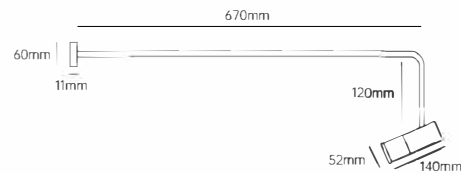


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
WALL	12W	$\geq$ 794lm	Wall Surface	non dimming 220V Triac dimming 0-10V Local dimming DALI dimming	2700K 3000K 4000K 6000K	6-60 degree	White Black	 honeycomb


- Application scenarios: museums, art galleries, exhibitions

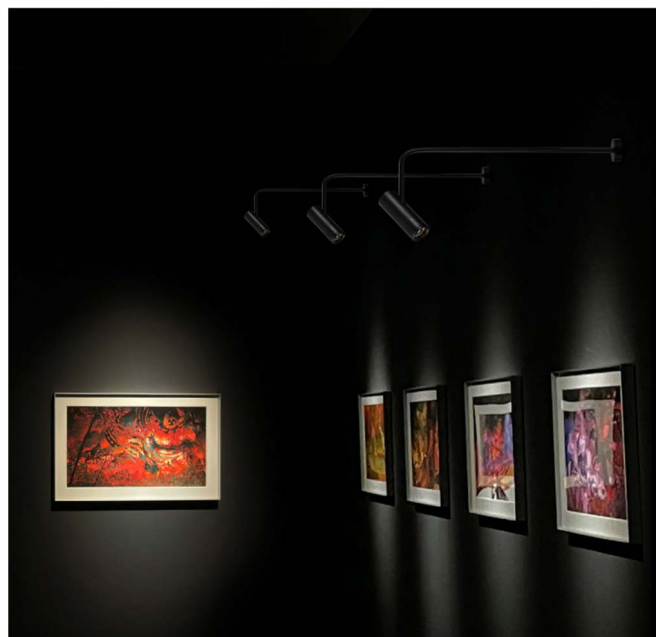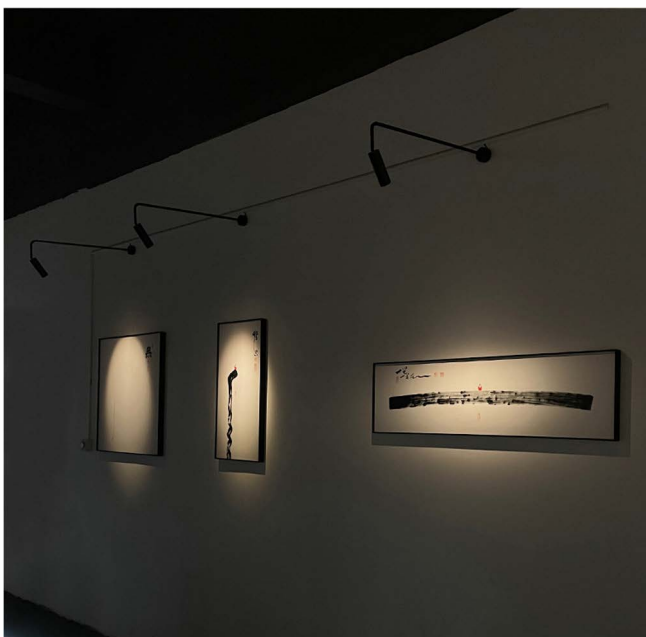





- Ra 97, высокая цветопередача
- Компактная конструкция, высокое качество и деликатность.
- Корпус лампы из алюминиевого сплава
- Мягкое и комфортное освещение
- Дистанционное управление яркостью, регулировкой цвета и фокусировкой.

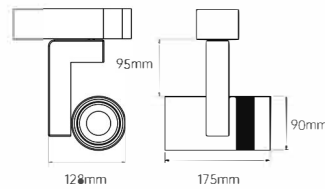

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Re-Contro	35W	≥1750lm	track	Wireless remote control	Remote color adjustment 3000K-6000K	10-50 degree	Black	 honeycomb

- Application scenarios: layout, painting, sculpture.

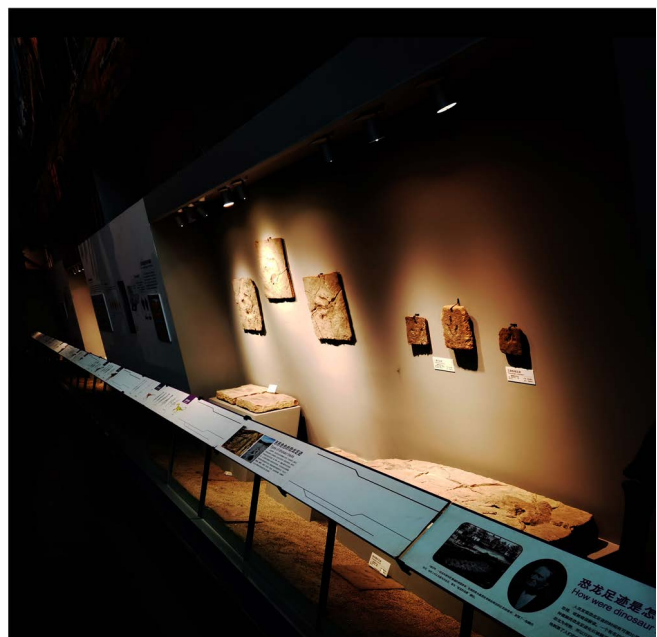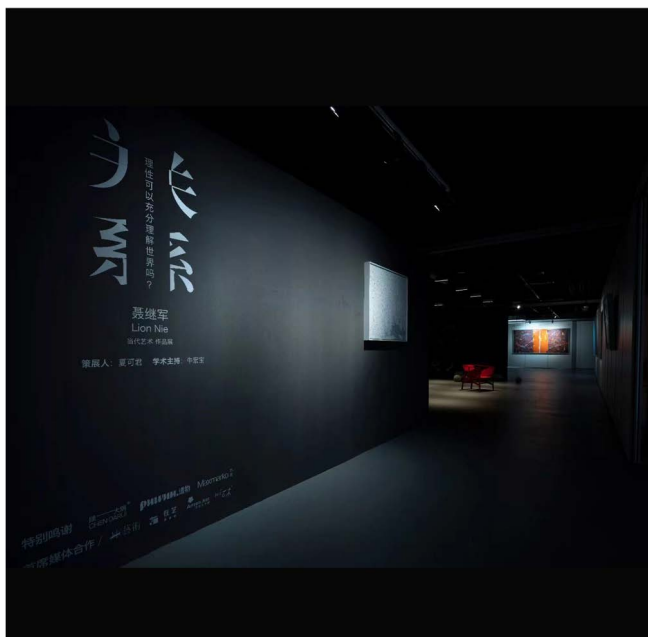





- Optical glass lens, fadeless
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Evening Sunshine
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface	Embedded	Magnetic Track

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Portable	7W	≥420lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming	model A model B model C model D	6-50 degree	White Black	

- Application scenarios: internet red light, Qingba, indoor atmosphere.

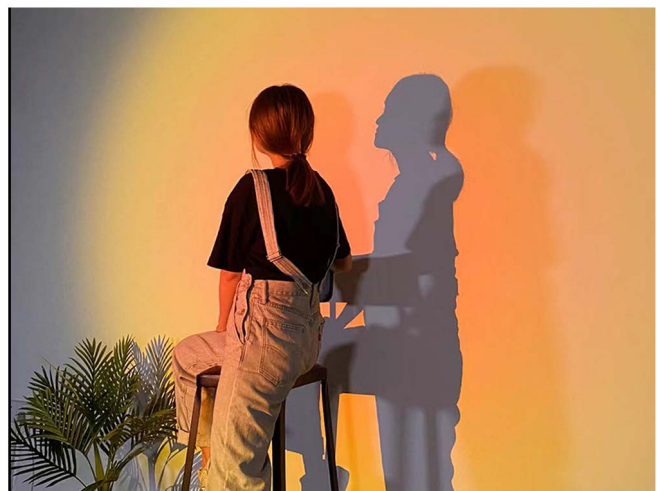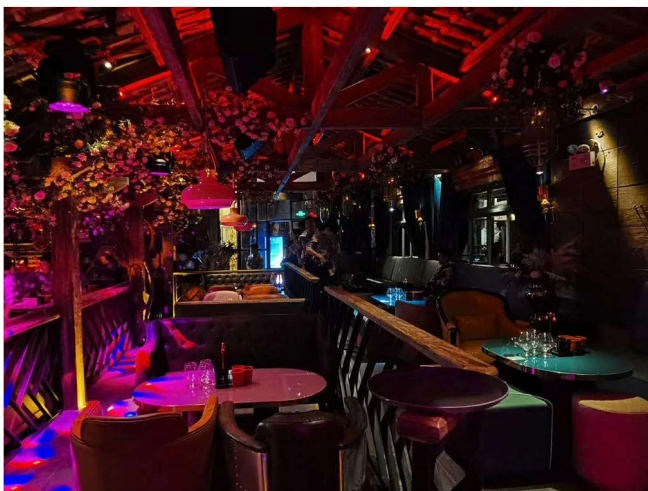





- Optical glass lens, fadeless
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Evening Sunshine
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface	Embedded	Magnetic Track

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
GSWY 0037	10W	≥600lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming	model A model B model C model D	6-50 degree	White Black	

- Application scenarios: internet red light, Qingba, indoor atmosphere.

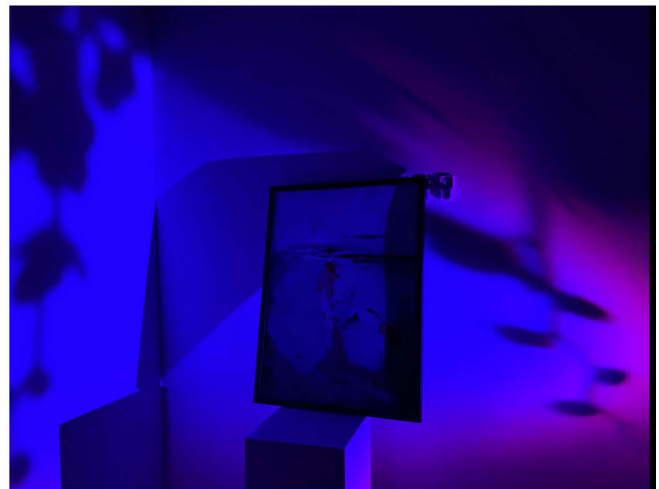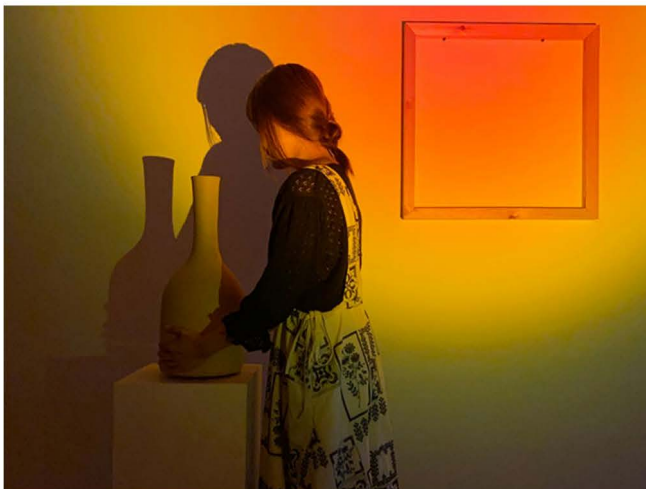





- Ra  $\geq$  97, The higher color rendering index, the more natural the product will be displayed
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface	Embedded	Magnetic Track

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Portable 0037	7W	$\geq$ 420lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming	3000K 4000K 6000K	6-50 degree	White Black	 honeycomb

- Application: Best- suited for dining areas such as restaurant,lounge

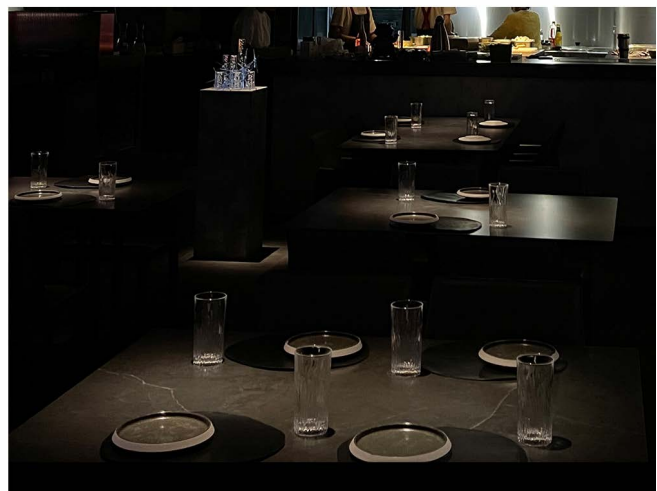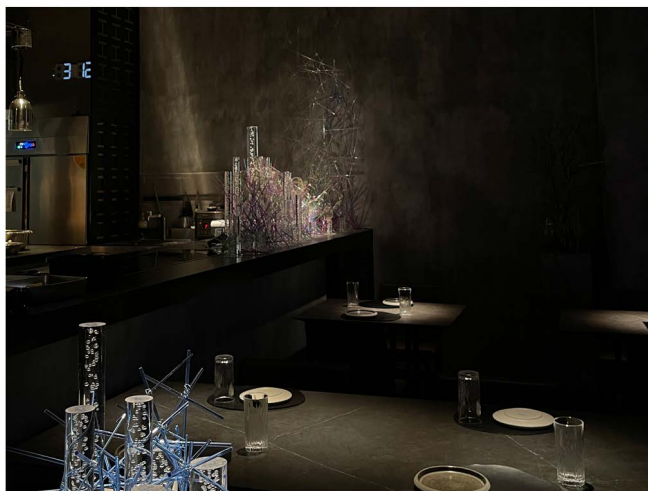





- Ra  $\geq$  97, The higher color rendering index, the more natural the product will be displayed
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface	Embedded	Magnetic Track

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Portable 0037	10W	$\geq$ 600lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming	3000K 4000K 6000K	6-50 degree	White Black	 honeycomb

- Application: Best- suited for dining areas such as restaurant,lounge

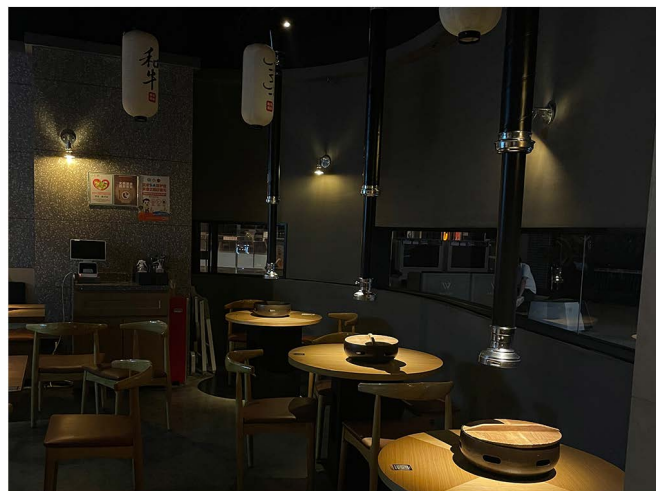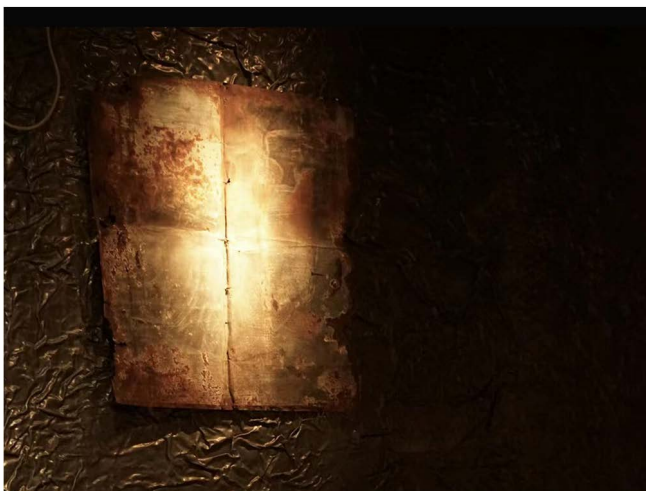



- Ra  $\geq$  97, The higher color rendering index, the more natural the product will be displayed
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare
- Professional optical lens, efficient heat dissipation, soft and comfortable

Track	Surface	Embedded	Magnetic Track


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Bell-heng	7W 10w	$\geq$ 450lm	Track Surface Embedded Magnetic Track	non dimming 220V Triac dimming	3000K 4000K 6000K	6-50 degree	White Black	 honeycomb

- Application scenarios: art galleries, tea spaces, shopping malls, etc.






- Ra 95, высокая цветопередача
  - Компактная конструкция, высокое качество и деликатность.
  - Корпус лампы из алюминиевого сплава
  - Мягкое и комфортное освещение
  - Защита от бликов, позволяющая избежать слепящего момента
- Замена ламп с патроном E27

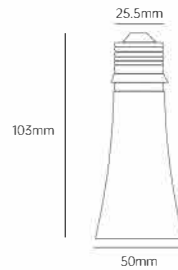


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Nero-wach	3W	≥ 240lm	Screw spot E27	non dimming	2700K	8-40 degree	Black	 honeycomb
	5W	≥ 400lm		220V Triac dimming	3000K			


- Application scenarios: catering stores, tea spaces, shopping malls, etc.

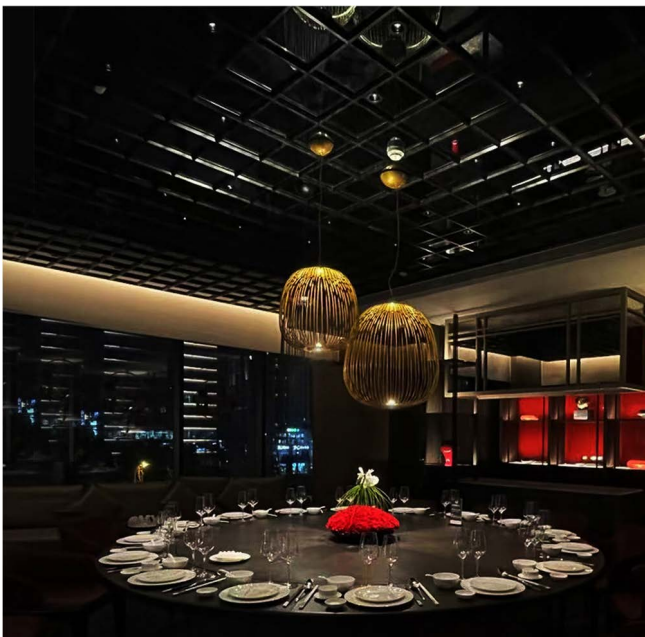




- Ra  $\geq$  92, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury

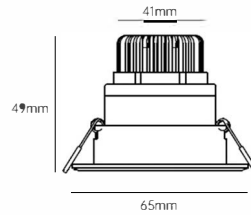


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
DEEP	3W 5W	$\geq$ 240lm $\geq$ 400lm	Embedded (Cutout 55mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	8-36 degree	White Black	 honeycomb

- Application scenarios: catering stores, home furnishings, shopping malls, etc.

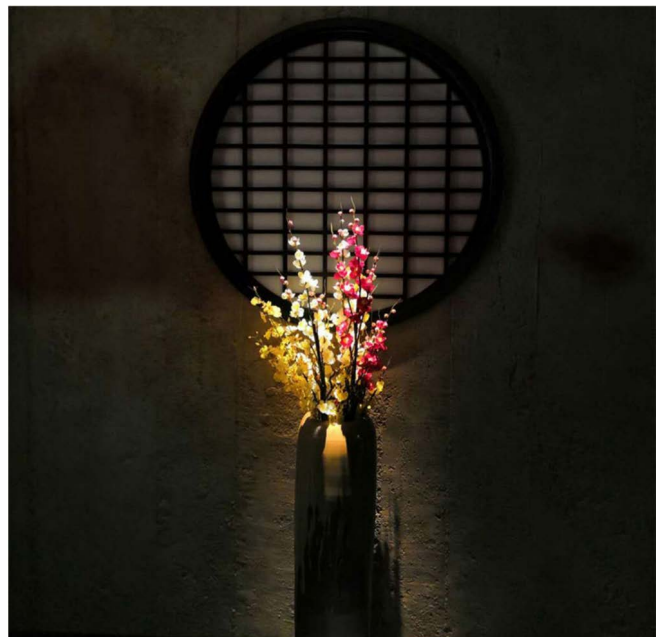




- Ra  $\geq$  92, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Deep-7W-2	7W 9W	$\geq$ 560lm $\geq$ 720lm	Embedded (Cutout 55mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	10-40 degree	White Black	 honeycomb

- Application scenarios: catering stores, home furnishings, shopping malls, etc.

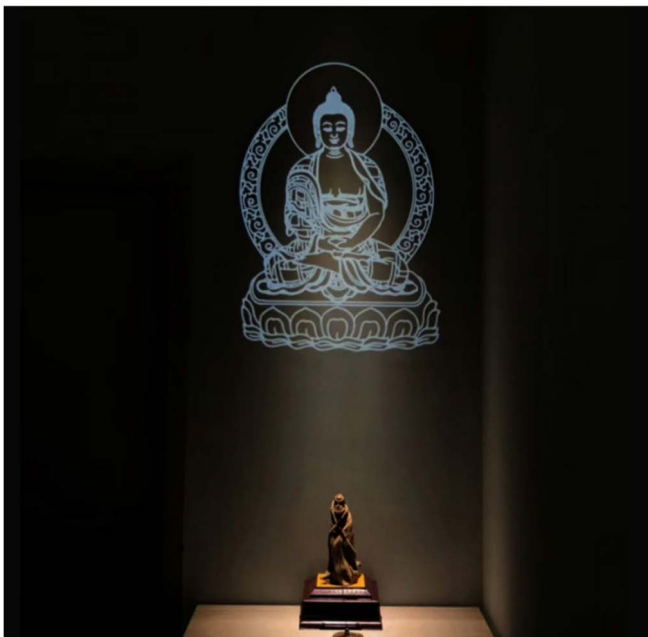



- Ra  $\geq$  92, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury

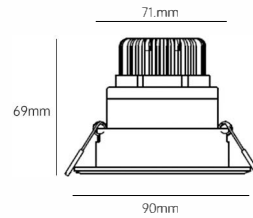


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
GSWY24	5W	$\geq$ 400lm	Embedded (Cutout 75mm)	non dimming 220V Triac dimming	3000K	10-40 degree	White Black	 honeycomb
	7W	$\geq$ 560lm			4000K			
	10W	$\geq$ 800lm			6000K			

- Application scenarios: catering stores, home furnishings, shopping malls, etc.





- Ra  $\geq$  92, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Deep-Fix	3W	$\geq$ 240lm	Embedded (Cutout 75mm)	non dimming 220V Triac dimming	3000K	10 Degrees	White Black	 honeycomb
	5W	$\geq$ 400lm			4000K	15 Degrees		
	7W	$\geq$ 560lm			6000K	24 Degrees		

- Application scenarios: catering stores, home furnishings, shopping malls, etc.







- Ra  $\geq$  92, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Cubic	7W	$\geq$ 525lm	Surface Mounted	non dimming 220V Triac dimming	3000K 4000K 6000K	15°Degree 24°Degree 26°Degree	White	no

- Application scenarios: home, living room, commercial

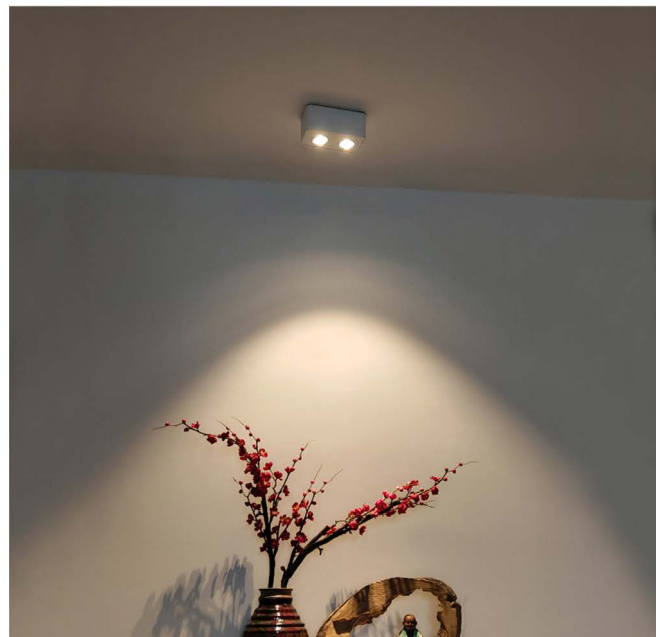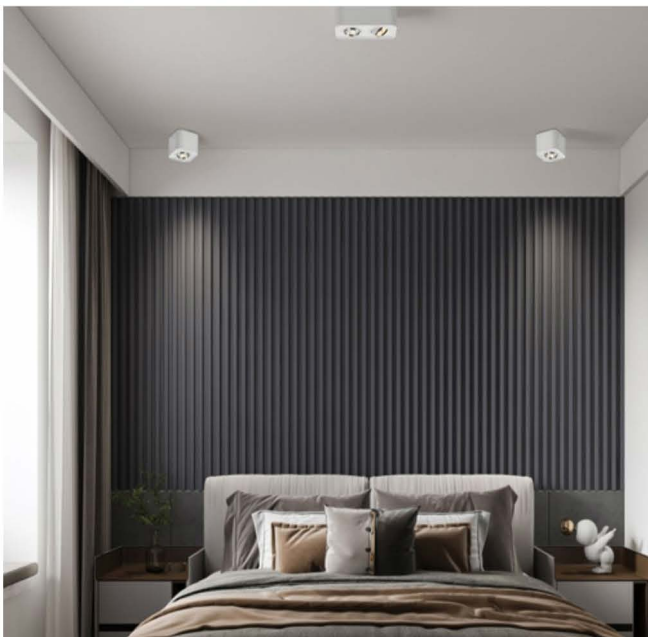




- Ra  $\geq$  92, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
12524	14W	$\geq$ 1050lm	Surface Mounted	non dimming 220V Triac dimming DALI dimming	3000K 4000K 6000K	15°Degree 24°Degree 26°Degree	White	no

- Application scenarios: home, living room, commercial

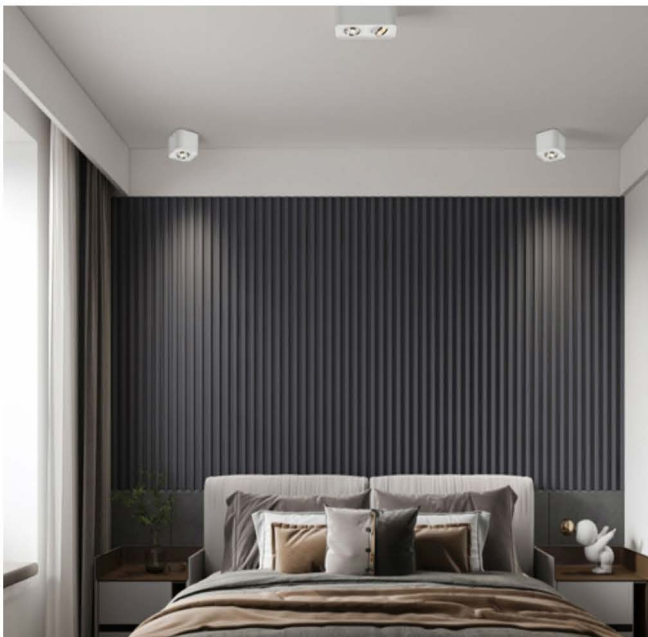




- Ra  $\geq$  92, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
12524	28W	$\geq$ 2010lm	Surface Mounted	non dimming 220V Triac dimming DALI dimming	3000K 4000K 6000K	15°Degree 24°Degree 26°Degree	White	no

- Application scenarios: home, living room, commercial

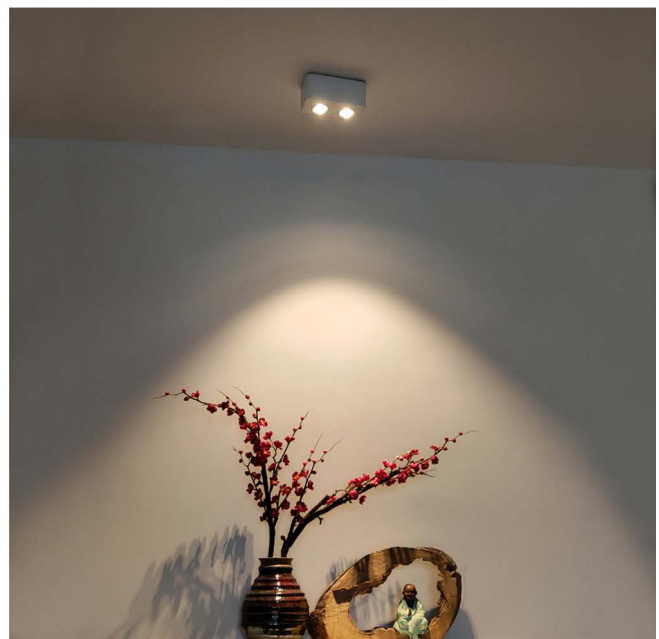





- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Round	5W 7W	$\geq$ 375lm $\geq$ 525lm	Surface Mounted	non dimming 220V Triac dimming	3000K 4000K 6000K	15 Degree 24 Degree 36 Degree	White Black	 honeycomb

- Application scenarios: living room, hallway, room

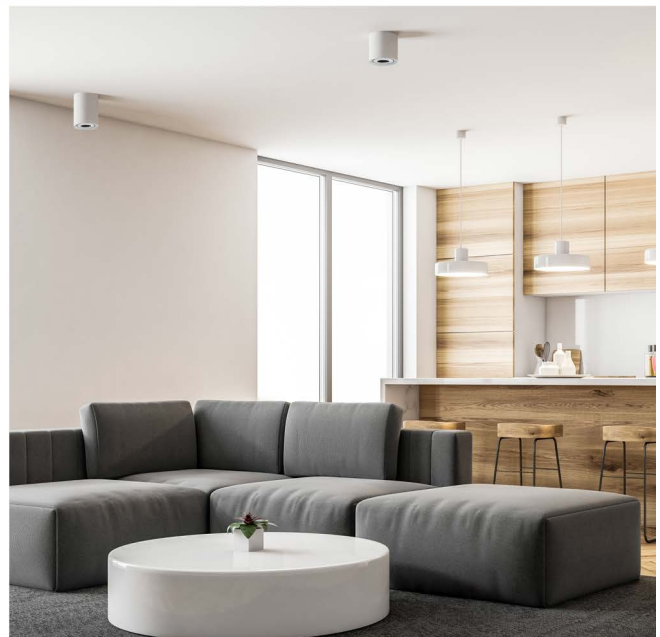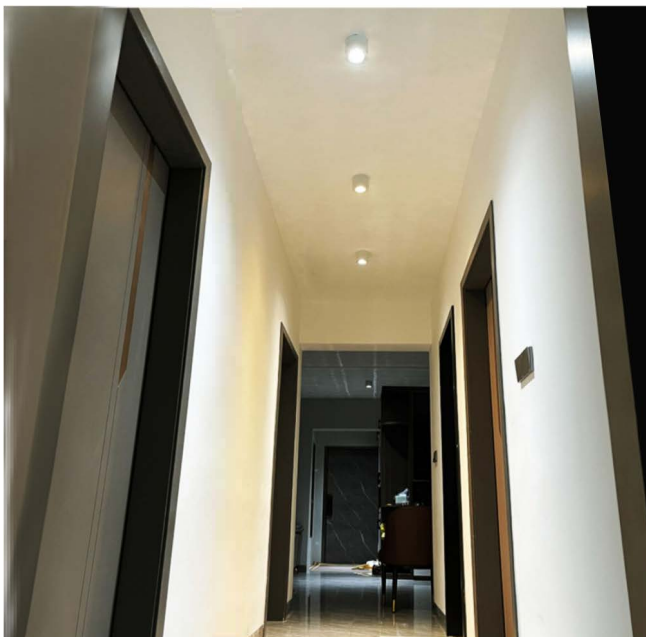




- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
ROUND	9W	$\geq$ 675lm	Surface Mounted	non dimming 220V Triac dimming	3000K 4000K 6000K	15 Degree 24 Degree 36 Degree	White Black	 honeycomb

- Application scenarios: living room, hallway, room

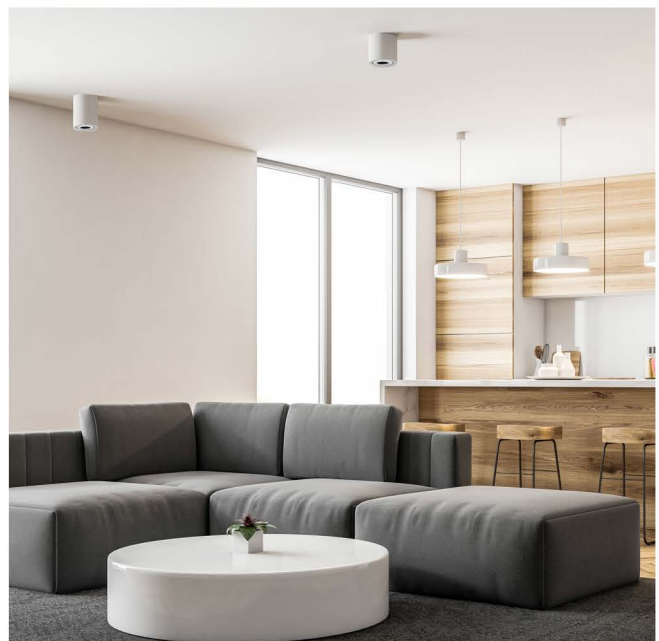



- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
ROUND	12W	$\geq$ 1100lm	Surface Mounted	non dimming 220V Triac dimming DALI dimming	3000K 4000K 6000K	15 Degree 24 Degree 36 Degree	White Black	 honeycomb

- Application scenarios: living room, hallway, room






- Ra  $\geq$  92, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury

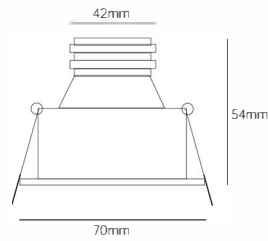


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Deep-Fix	3W	$\geq$ 240lm	Embedded (Cutout 55mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	5 Degree	White Black	no

- Application: Best- suited for accent lighting

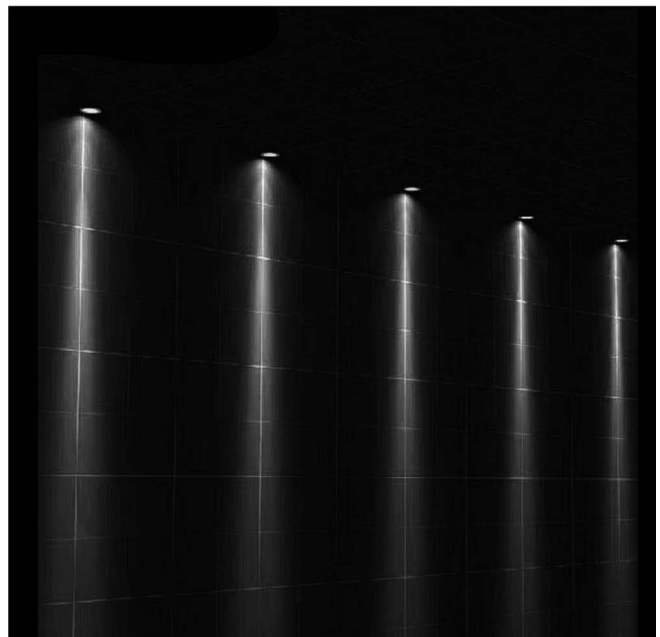



- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Deep-Well	5W	$\geq$ 375lm	Embedded (Cutout 55mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	15 Degree 24 Degree 36 Degree	White Black	no

- Application: Best- suited for Home living room






- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Deep-Well	7W	$\geq$ 525lm	Embedded (Cutout 75mm)	non dimming	3000K	15 Degree	White Black	no
	10W	$\geq$ 750lm		220V Triac dimming	4000K	24 Degree		
					6000K	36 Degree		

- Application: Best- suited for Home living room

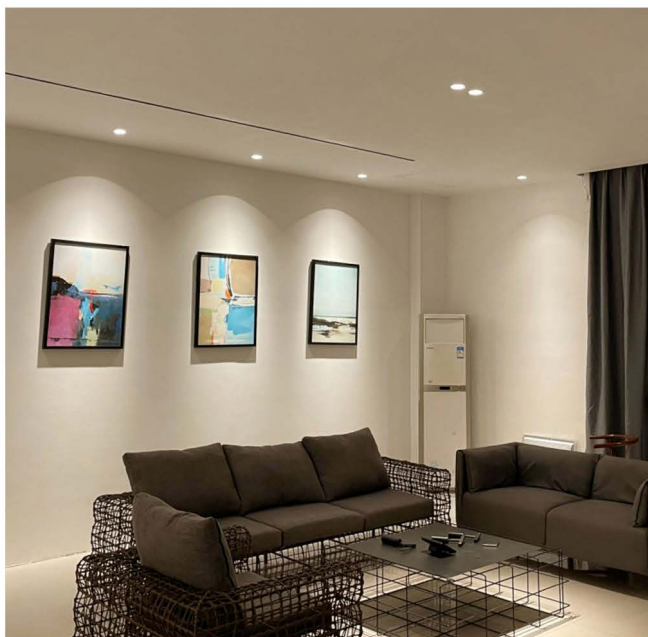





- Ra  $\geq$  92, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury

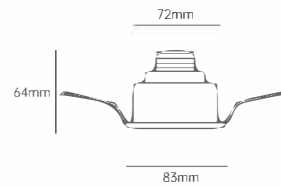

7Wattage/10Wattage size


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
WELL	7W 10W	$\geq$ 602lm $\geq$ 860lm	Embedded (Cutout 75mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	10-40 degree	White+Black	 honeycomb

- Application scenarios: ceiling lighting, desktop, decorative lighting, photo painting

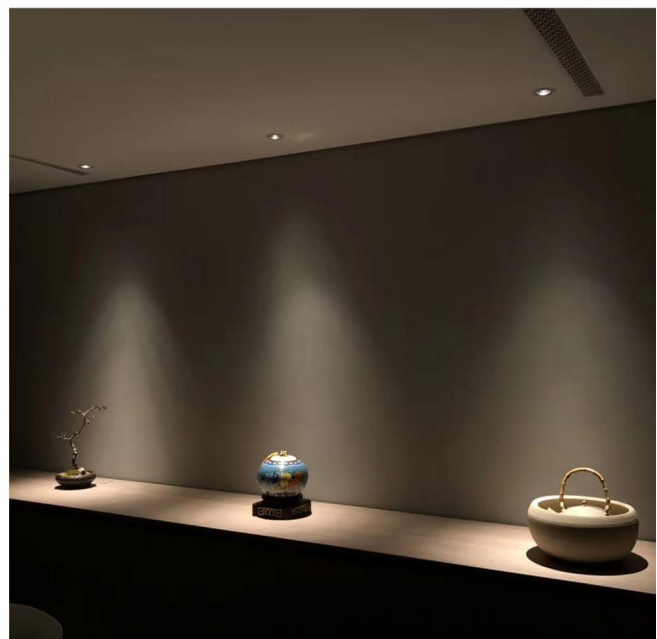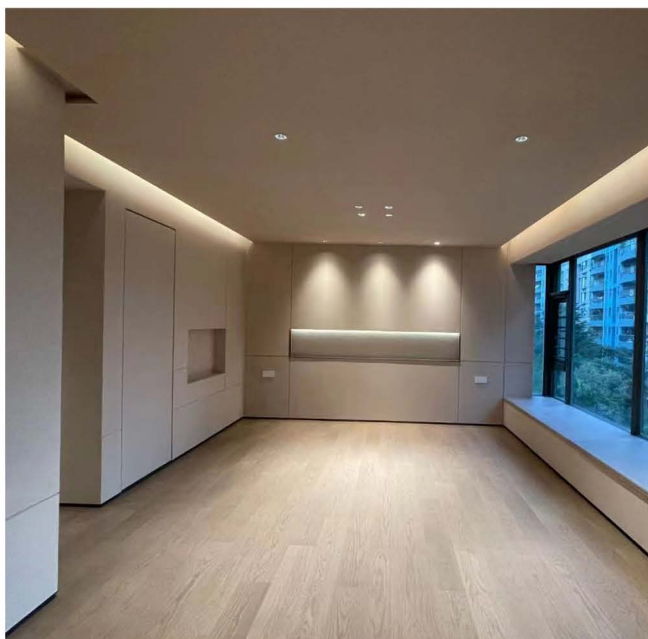





- Ra  $\geq$  92, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury



7Wattage/10Wattage size


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
WELL	7W 10W	$\geq$ 602lm $\geq$ 860lm	Embedded (Cutout 75mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	10-40 degree	White+Black	 honeycomb

- Application scenarios: ceiling lighting, desktop, decorative lighting, photo painting

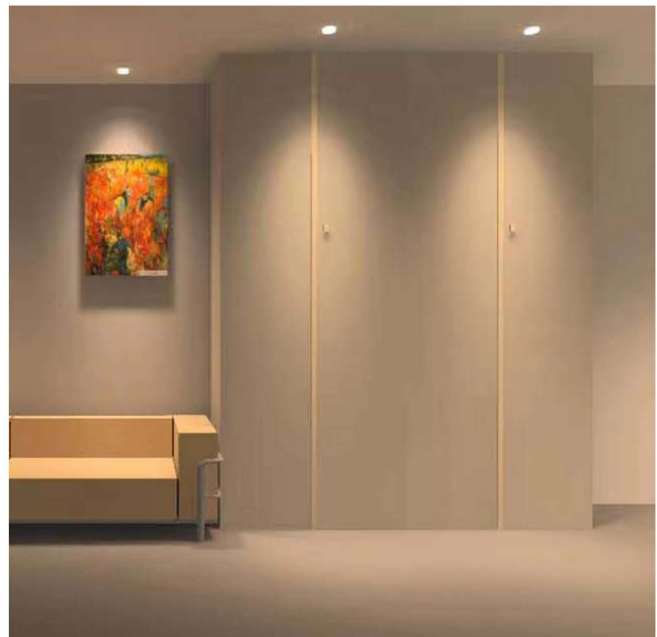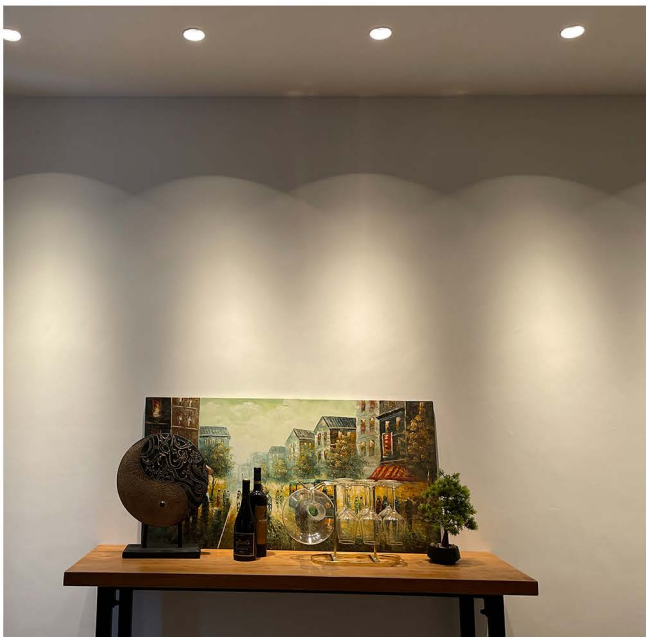





- Ra  $\geq$  92, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury

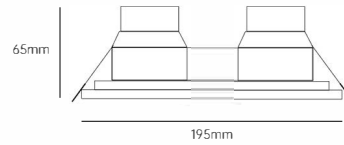


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
WELL	20W	$\geq$ 1600lm	Embedded Cutout 181*83mm	non dimming 220V Triac dimming 0-10V Local dimming DALI dimming	3000K 4000K 6000K	10-40 degree	White Black	 honeycomb

- Application scenarios: commercial, home furnishings.

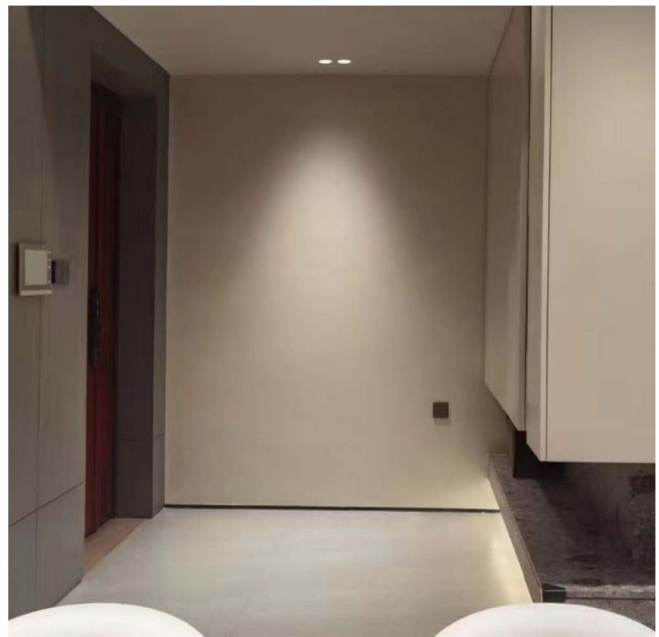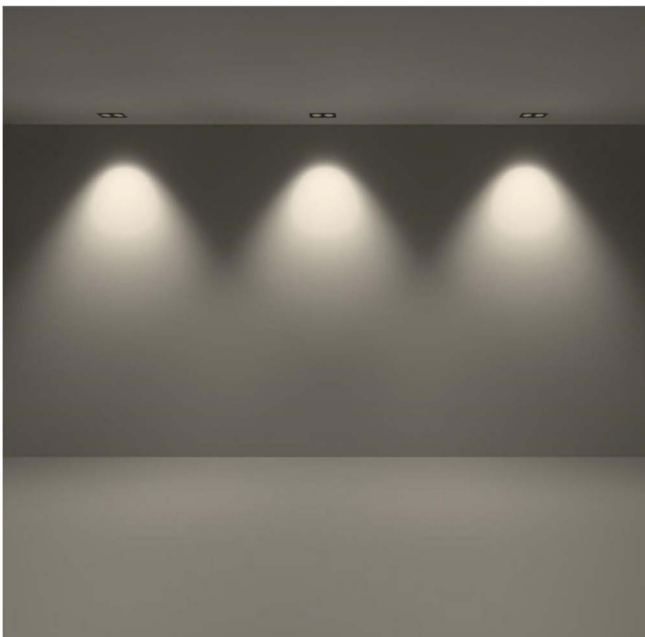




- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury

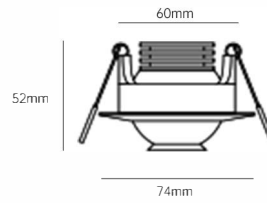


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
EYE	3W 5W	$\geq$ 240lm $\geq$ 400lm	Embedded (Cutout 40-70mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	10-50 degree	White Black	no

- Application scenarios: art galleries, tea spaces, shopping malls, etc.

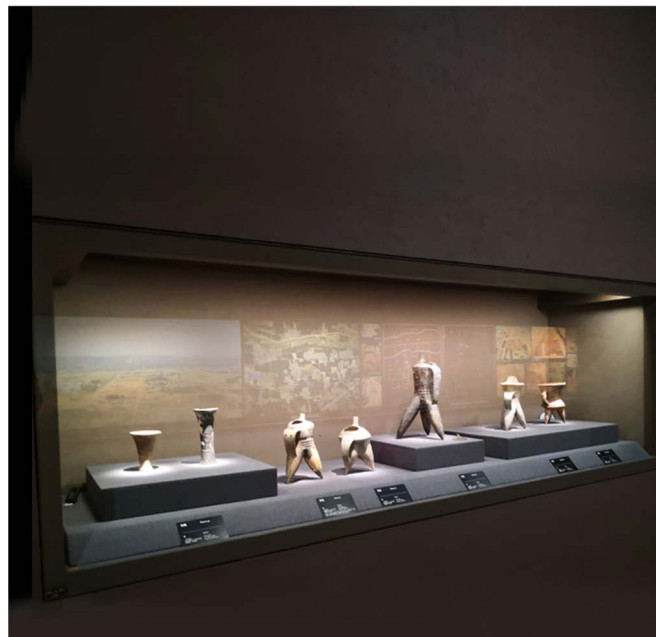





- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- 12-54degree zoom
- Anti glare, avoiding injury

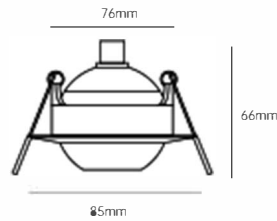


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Aple	7W	$\geq$ 420lm	Embedded (Cutout 75mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	12-54degree zoom	White Black	no

- Application scenarios: high-altitude lighting, desktop, decorative lighting, and lighting.

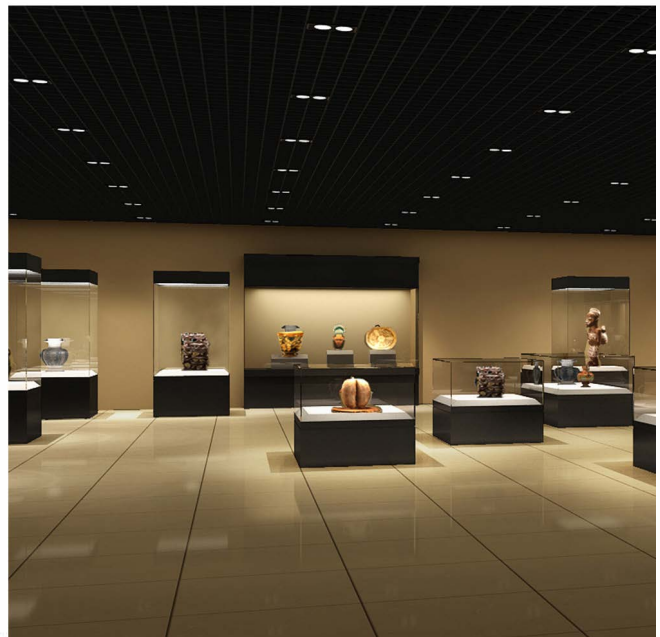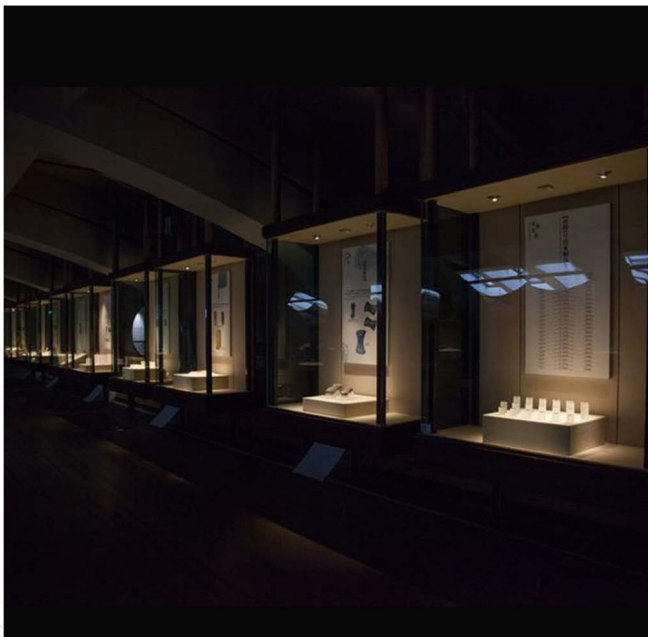




- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- 10-60 degree light zoom
- Anti glare, avoiding injury

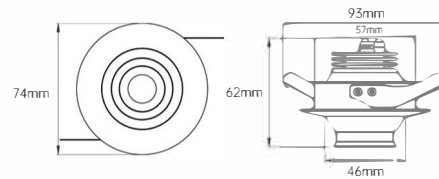


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
GP006	3W 5W	$\geq$ 240lm $\geq$ 400lm	Embedded (Cutout 65mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	10-60 degree	White Black Silvery	no

- Application scenarios: exhibition cabinets, hallways.

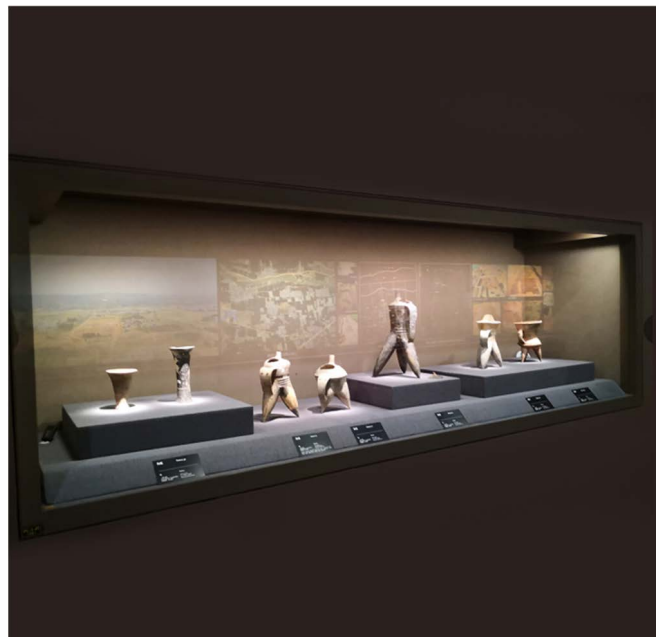




- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- 10-50 degree light zoom
- Anti glare, avoiding injury

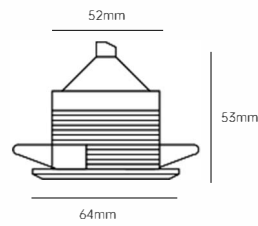


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Deep-Push	3W 5W	$\geq$ 240lm $\geq$ 400lm	Embedded (Cutout 55mm)	220V Triac dimming	3000K 4000K 6000K	10-40 degree	White Black	No

- Application scenarios: exhibition cabinets, hallways.

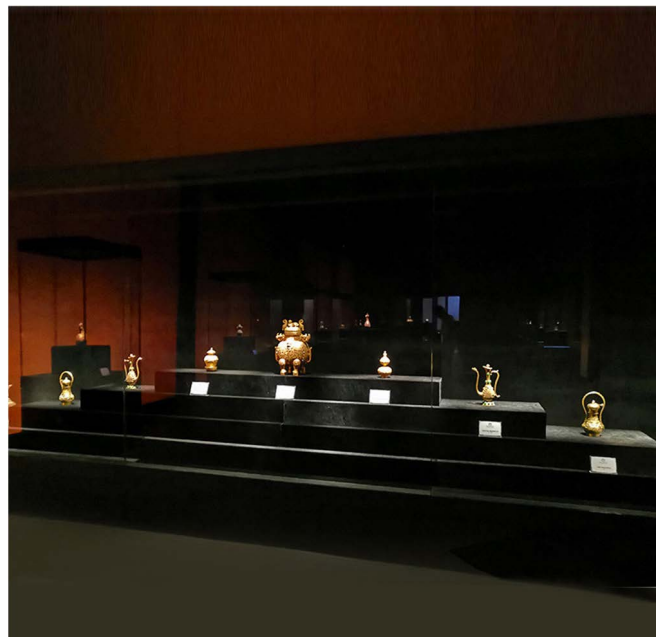



- Ra  $\geq$  95, high color rendering
- 10-50 degree push pull zoom
- Horizontal 360 degree rotating light
- Soft and comfortable lighting
- Lamp holder can be deformed and multifunctional

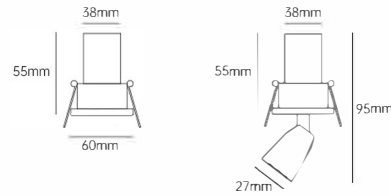


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Belka -3W-3	1W	$\geq$ 60lm	Embedded (Cutout 50mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	10-50 degree	White Black	no

- Application scenario: exhibition cabinets, wall cabinets







- Ra  $\geq$  95, high color rendering
- 10-50 degree push pull zoom
- Horizontal 360 degree rotating light
- Soft and comfortable lighting
- Lamp holder can be deformed and multifunctional

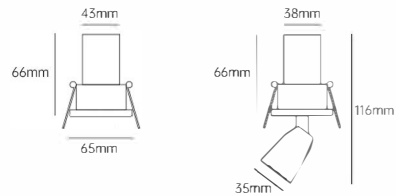


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
BELKA	3W	$\geq$ 180lm	Embedded (Cutout 55mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	10-50 degree	White Black	no

- Application scenario: exhibition cabinets, wall cabinets

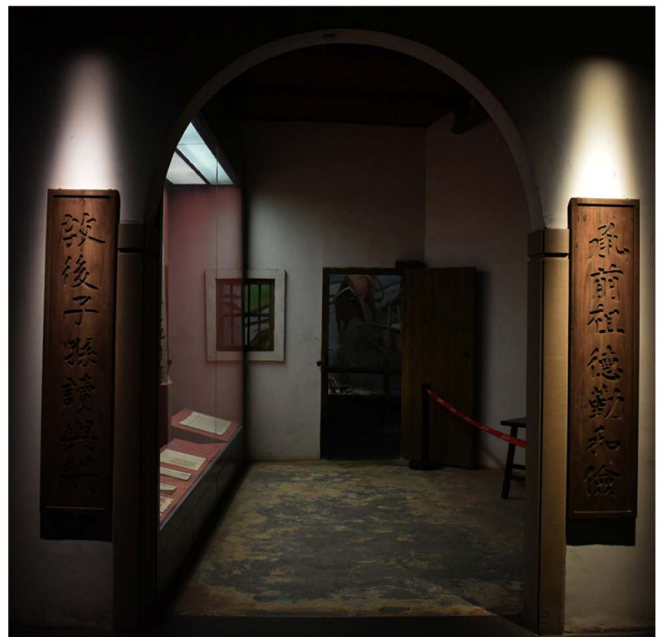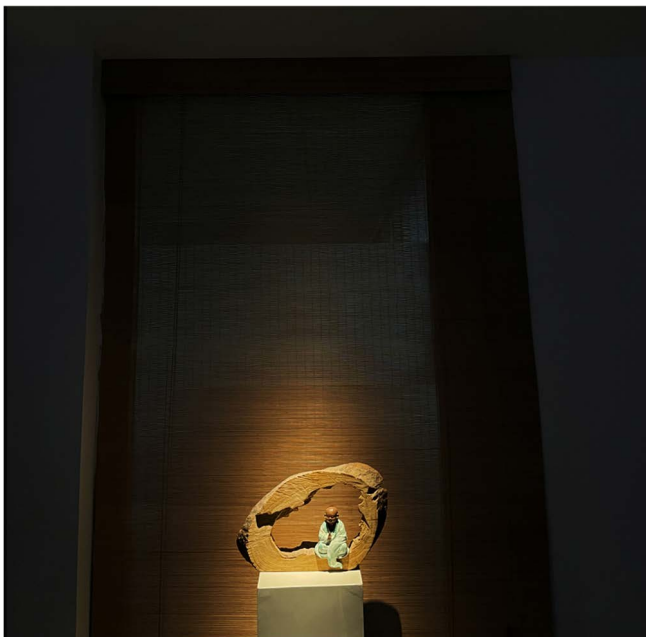



- Ra  $\geq$  95, high color rendering
- 10-50 degree push pull zoom
- Horizontal 360 degree rotating light
- Soft and comfortable lighting
- Lamp holder can be deformed and multifunctional




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
BELKA	1W 3W	$\geq$ 60lm $\geq$ 180lm	Embedded (Cutout 45mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	10-40 degree	White Black	no


- Application scenario: exhibition cabinets, wall cabinets





- Ra  $\geq$  92, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
SOLO-Deep	3W	$\geq$ 180lm	Embedded (Cutout 40mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	10-40 degree	White Black	 honeycomb


- Application: Best- suited for showcase cabinet





- Ra  $\geq$  90, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- 24V safe voltage




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Cinema	1.5W	$\geq$ 90lm	Mini track	customized 0-10v	3000K 4000K 6000K	10-40 degree	White Black	 Shading fan leaf

- Application : exhibition cabinets, flat cabinets, and bar counters.






- Ra  $\geq$  90, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- 24V safe voltage




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Cinema	3W	$\geq$ 180lm	Mini track	customized 0-10v	3000K 4000K 6000K	10-40 degree	White Black	no

- Application : exhibition cabinets, flat cabinets, and bar counters.

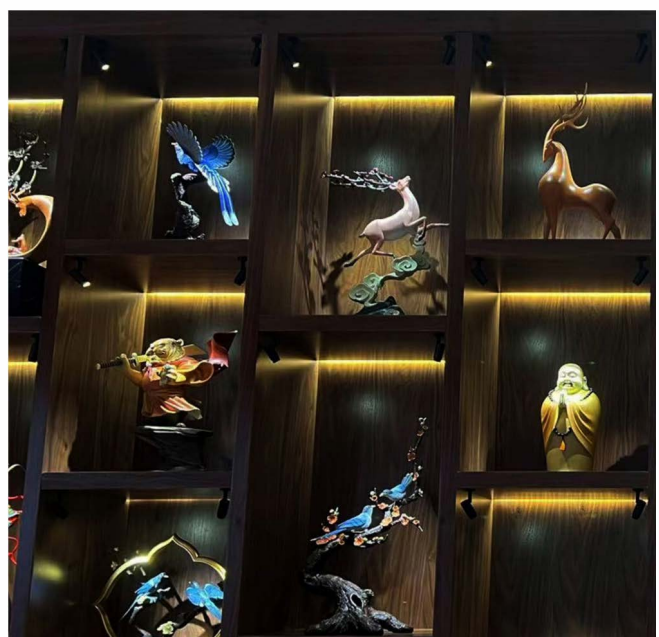




- Ra  $\geq$  90, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- 24V safe voltage




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Mini-Spot	1W	$\geq$ 80lm	Surface Mounted	non dimming 220V Triac dimming	3000K 4000K 6000K	10-40 degree	White Black	 Second optical lens

- Application scenarios: art galleries, tea spaces, shopping malls, etc.

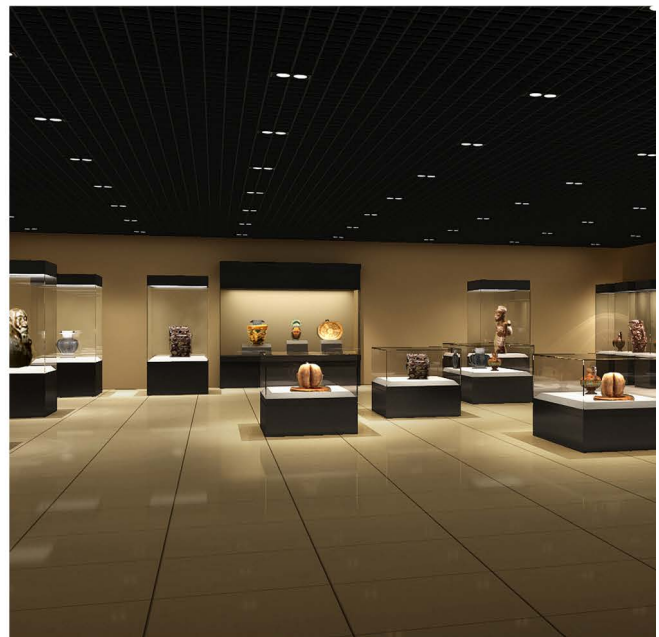




- Ra  $\geq$  90, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- 24V safe voltage




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Mini-Spot	3W	$\geq$ 240lm	Surface Mounted	non dimming 220V Triac dimming	3000K 4000K 6000K	10-40 degree	White Black	 Second optical lens

- Application scenarios: art galleries, tea spaces, shopping malls, etc.

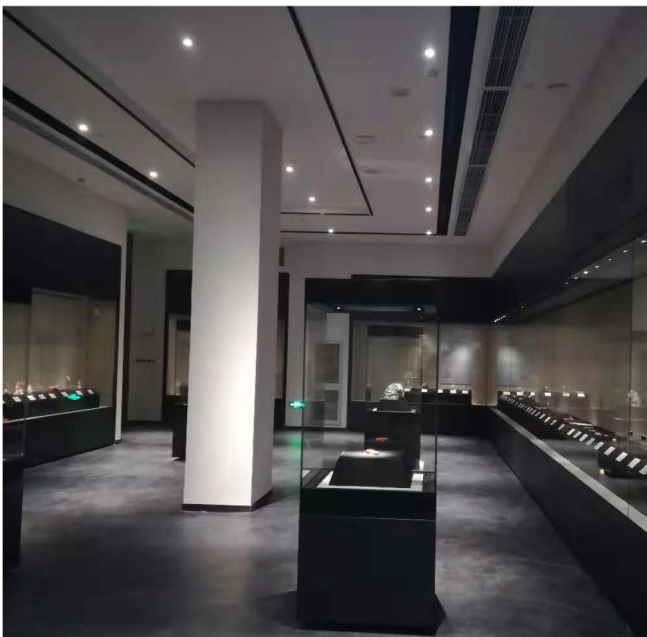





- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- The zoom range is 10 °~50 °, and lighting can be adjusted according to the application scenario.




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
EMNBE	1W	$\geq$ 80lm	Embedded (Opening46-52mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	10-50 degree	White Black	no

- Application scenario: independent cabinet

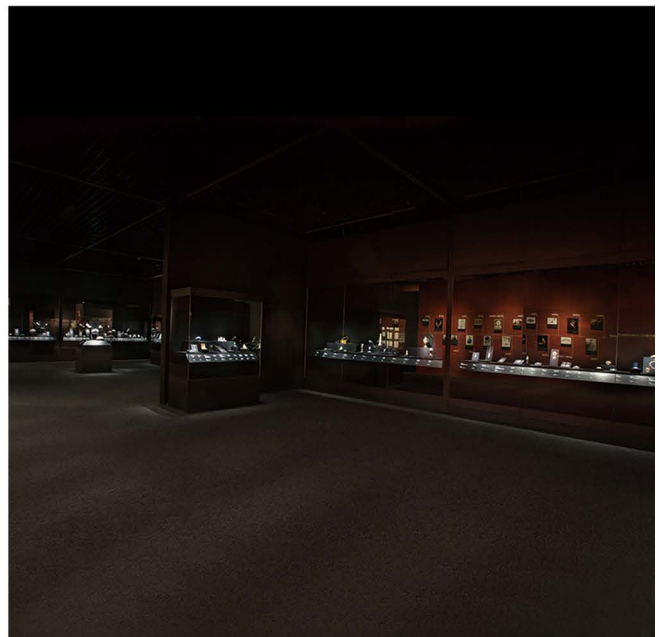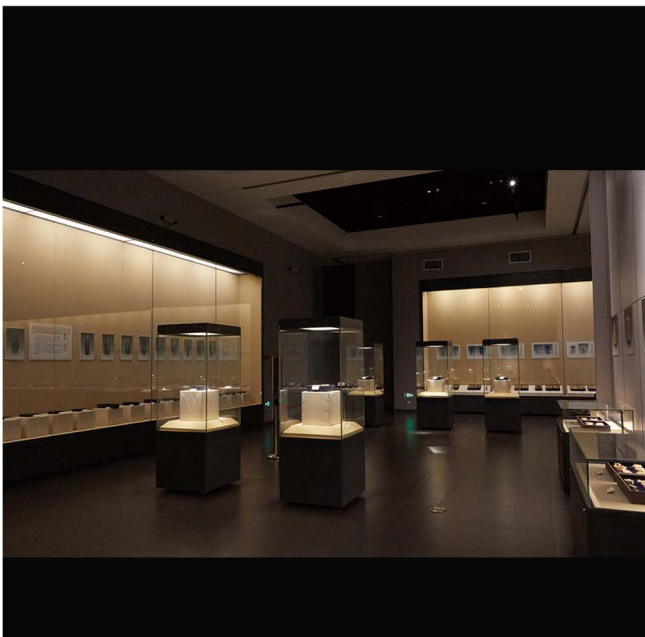





- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- The zoom range is 10 °~50 °, and lighting can be adjusted according to the application scenario.




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
EMBE	1W	$\geq$ 80lm	Embedded (Opening35mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	10-50 degree	White Black	no

- Application scenario: independent cabinet

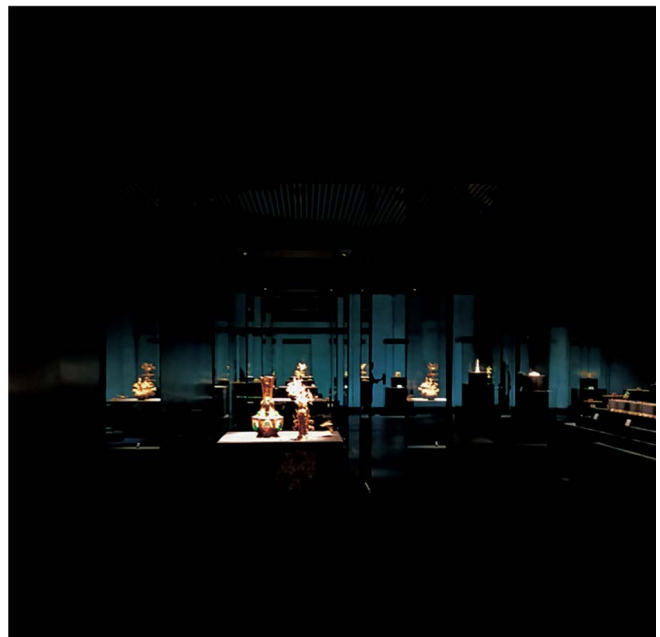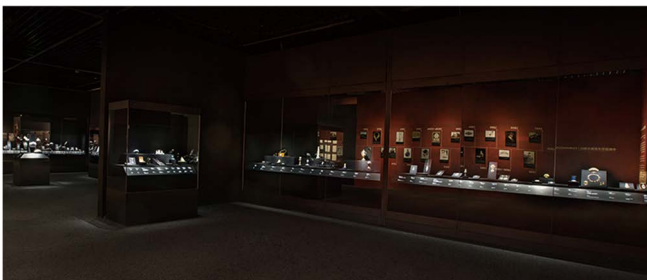




- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury

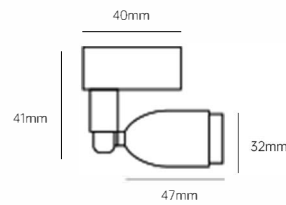


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Mini-Cam	3W	$\geq$ 240lm	Surface Mounted	non dimming 220V Triac dimming	3000K 4000K 6000K	10-40 degree	Black	no

- Application scenario: Exhibition cabinet.

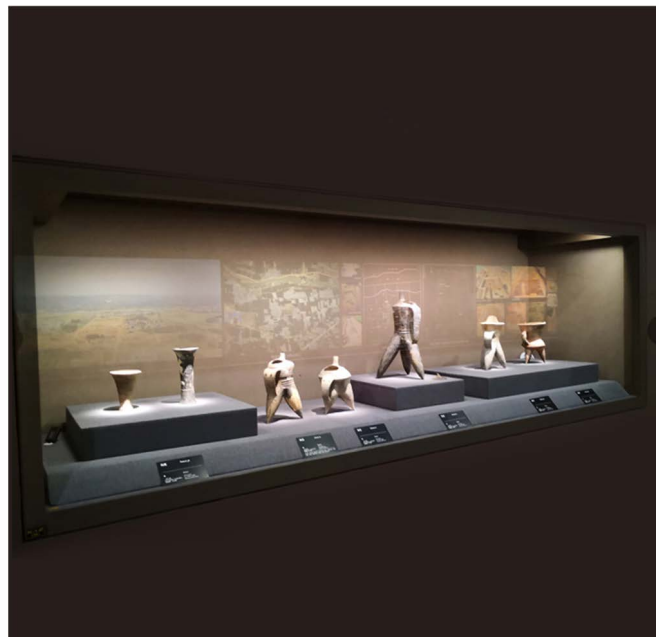




- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury

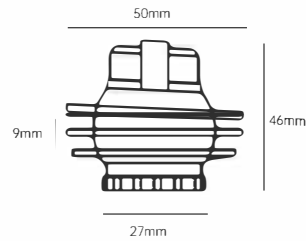


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
EMBED	1W 3W	$\geq$ 80lm $\geq$ 240lm	Embedded (Opening45mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	8-40 degree	Black	no

- Application scenario: Exhibition cabinet.

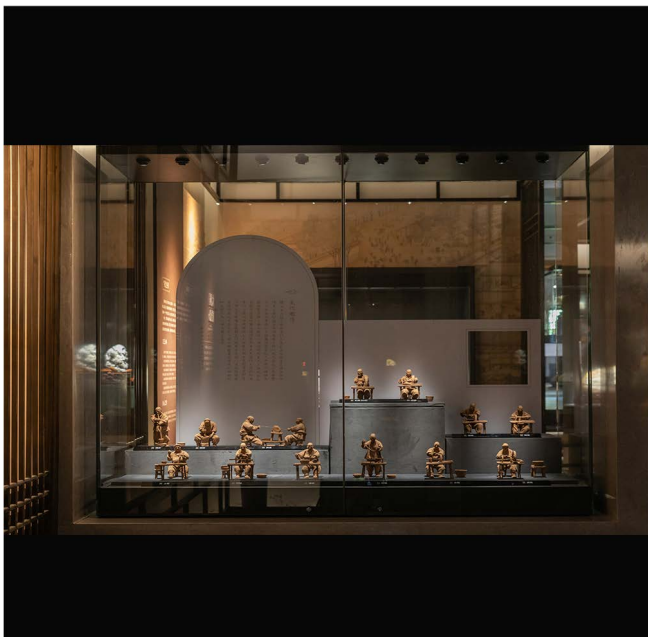




- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- 24V safe voltage




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Mini-Spot	1W	$\geq$ 80lm	Surface	non dimming 220V Triac dimming	3000K 4000K 6000K	10-40 degree	White Black	 second optical design


- Application scenarios: art galleries, tea spaces, shopping malls, etc.

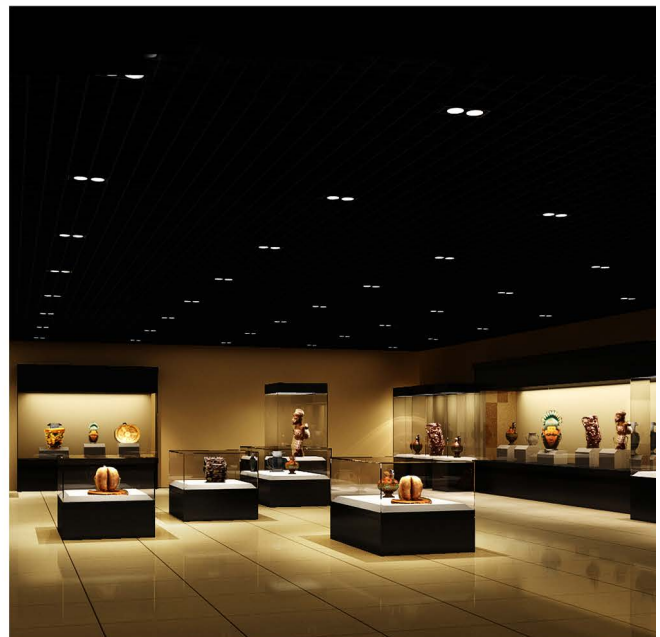




- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- 24V safe voltage




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Mini-spot	3W	$\geq$ 240lm	Surface	non dimming 220V Triac dimming	3000K 4000K 6000K	10-40 degree	White Black	 second optical design

- Application scenarios: art galleries, tea spaces, shopping malls, etc.

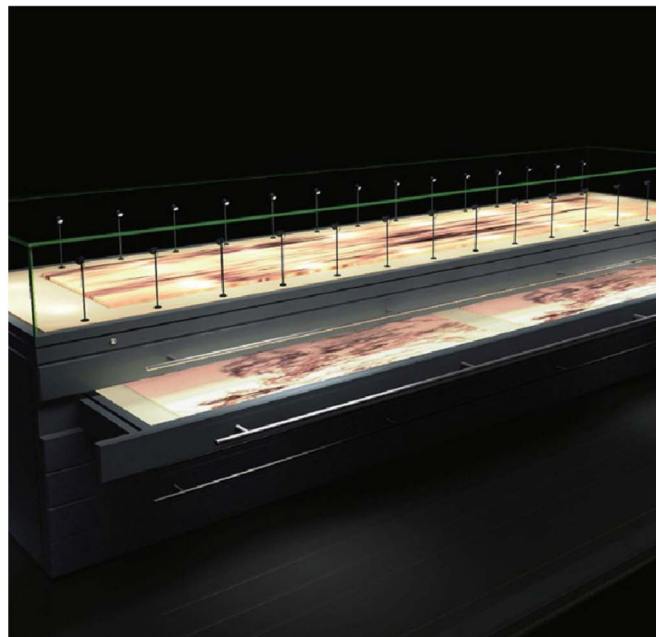




- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- 24V safe voltage




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Mini-Spot	1W	$\geq$ 80lm	Embedded (opening22mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	10-40 degree	White Black	 second optical design


- Application scenarios: exhibition cabinets, flat cabinets, niche cabinets.

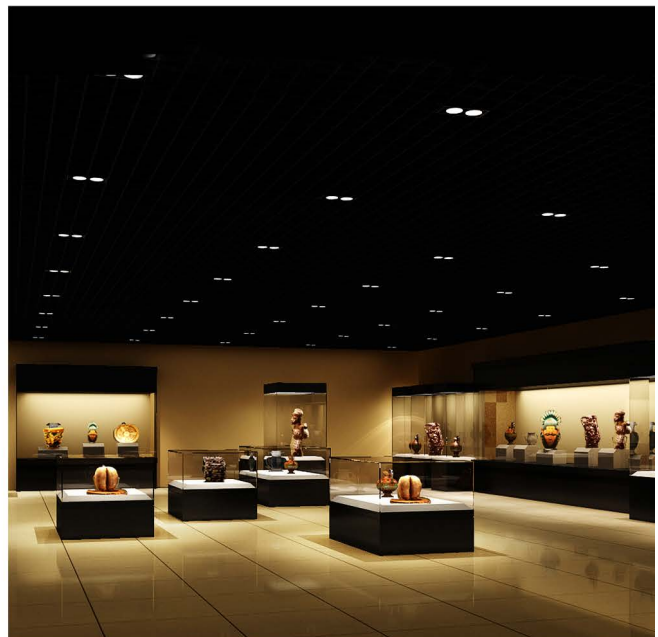



- Zoom design & Accent lighting
- Surface treatment for housing
- 3-Way dimmable & More than 16hours
- CRI>90 (Color Rendering Index)
- TYPE-C charging port

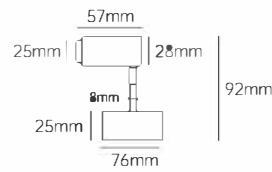


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
ReSpot 003	3W	≥240lm	portable charge	3rd gear dimming	3000K 4000K 6000K	10-40 degree	White Black	 second optical design


- Application scenarios: display cabinets, small item illumination, temporary exhibitions.






- Zoom design & Accent lighting
- Surface treatment for housing
- 3-Way dimmable & More than 16hours
- CRI>90 (Color Rendering Index)
- TYPE-C charging port

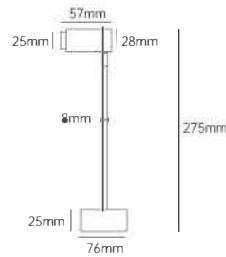


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
ReSpot	3W	≥240lm	portable charge	3rd gear dimming	3000K 4000K 6000K	10-40 degree	White Black	 second optical design


- Application scenarios: display cabinets, small item illumination, temporary exhibitions.

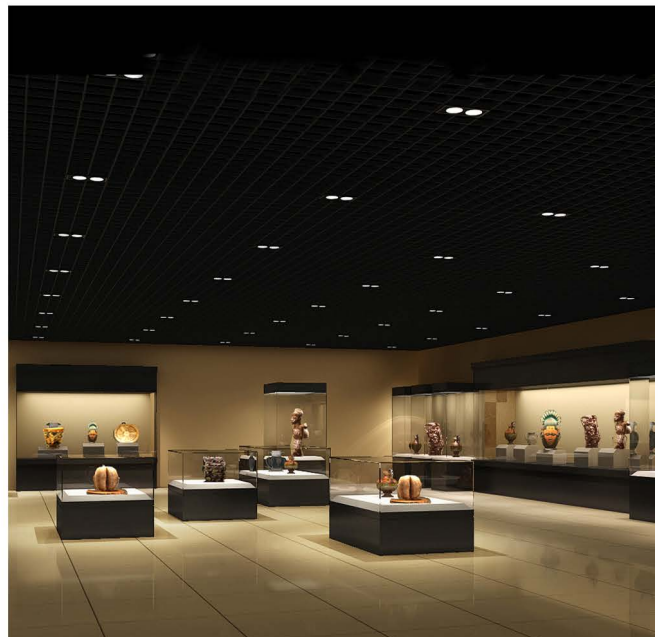




- Zoom design & Accent lighting
- Surface treatment for housing
- 3-Way dimmable & More than 16hours
- CRI>90 (Color Rendering Index)
- TYPE-C charging port

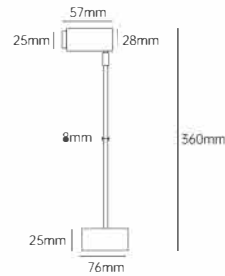

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
ReSpot	3W	≥240lm	portable charge	3rd gear dimming	3000K 4000K 6000K	10-40 degree	White Black	 second optical design

- Application scenarios: display cabinets, small item illumination, temporary exhibitions.



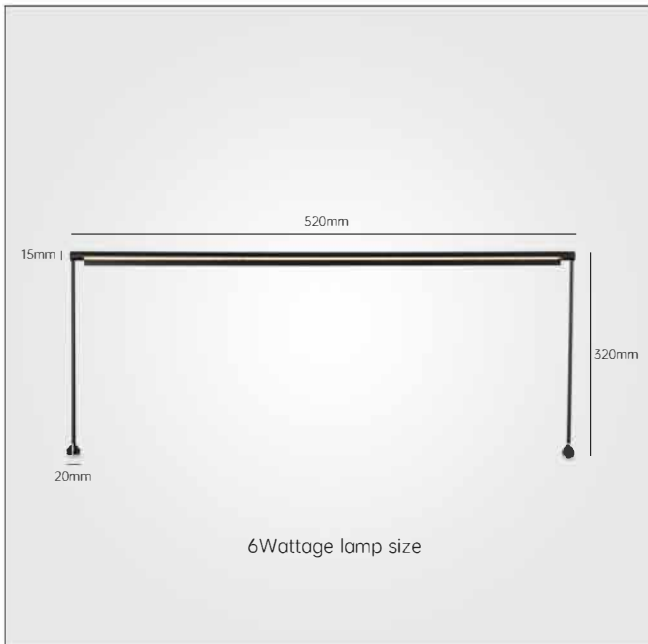


- Ra  $\geq$  93, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Customized length of 1000mm~1900mm.



Model number	Wattage	Luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Line-Polar	1M=12W	1M=60LM	Embedded (Opening10mm)	Non dimming 220V Triac dimming	3000K 4000K 6000K	60 Degree polarized light	Black silver	no

- Application scenarios: exhibition cabinets, flat cabinets.



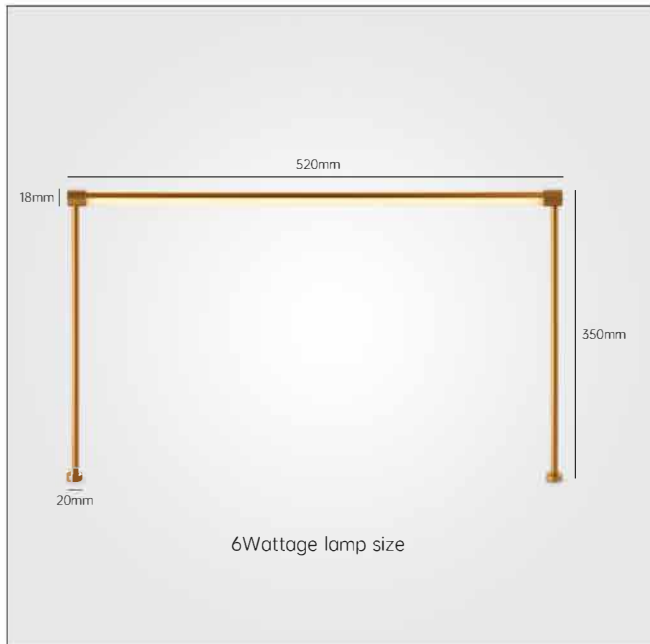

- Ra  $\geq$  93, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Customized length of 1000mm~1900mm.




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Line-Polar	1M=12W	1M=60LM	Embedded (Opening12mm) surface mounted	Non dimming 220V Triac dimming	3000K 4000K 6000K	60 Degree Floodlight	Golden Silvery Black	no

- Application scenarios: exhibition cabinets, flat cabinets.






- Ra  $\geq$  97, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Stepless dimming (customized version)
- Anti glare, avoiding injury




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
GUS-330	10W	$\geq$ 660lm	Portable floor mounted	non dimming Local dimming	2700K 3000K 4000K 6000K	10-60 degree	Black	 honeycomb

- Application scenarios: temporary exhibitions, art galleries, museums

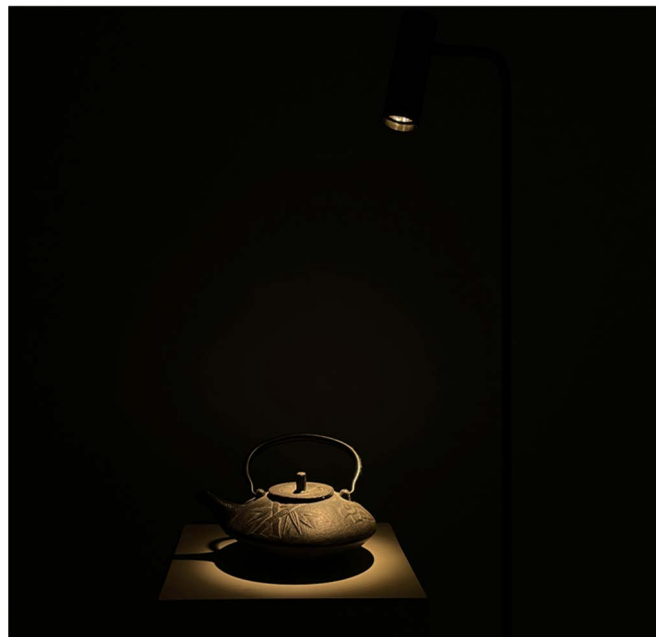




- Ra  $\geq$  97, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Stepless dimming (customized version)
- Anti glare, avoiding injury

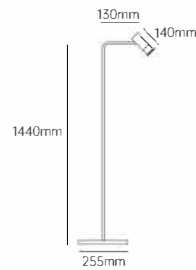


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
GUS	10W	$\geq$ 660lm	Portable floor mounted	non dimming Local dimming	2700K 3000K 4000K 6000K	10-60 degree	Black	 honeycomb

- Application scenarios: temporary exhibitions, art galleries, museums

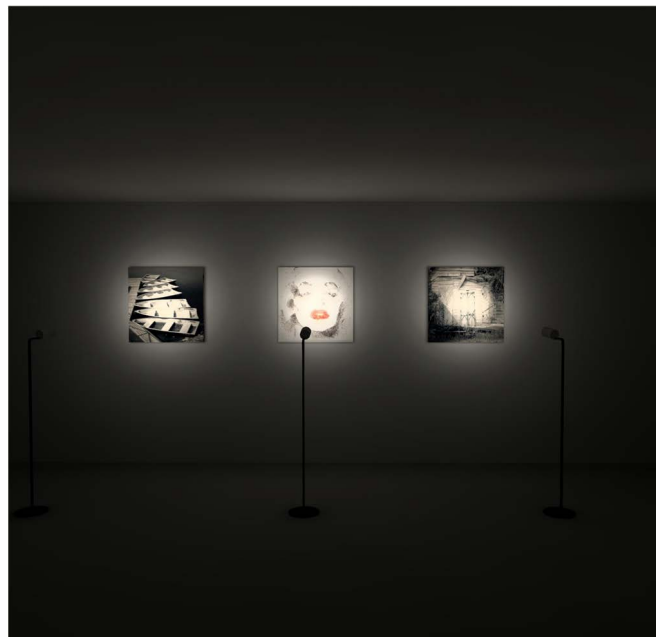



- An optical film that never fades
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury

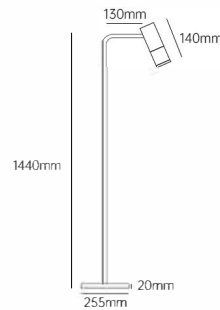


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
GUS	10W	≥660lm	Portable floor mounted	non dimming Local dimming	A style B style C style D style	10-60 degree	Black	

- Application scenarios: internet celebrity stores, Qingba, atmosphere






- An optical film that never fades
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
GSWY 0049	10W	≥660lm	Portable floor mounted	non dimming Local dimming	A style B style C style D style	10-60 degree	Black	

- Application scenarios: internet celebrity stores, Qingba, atmosphere

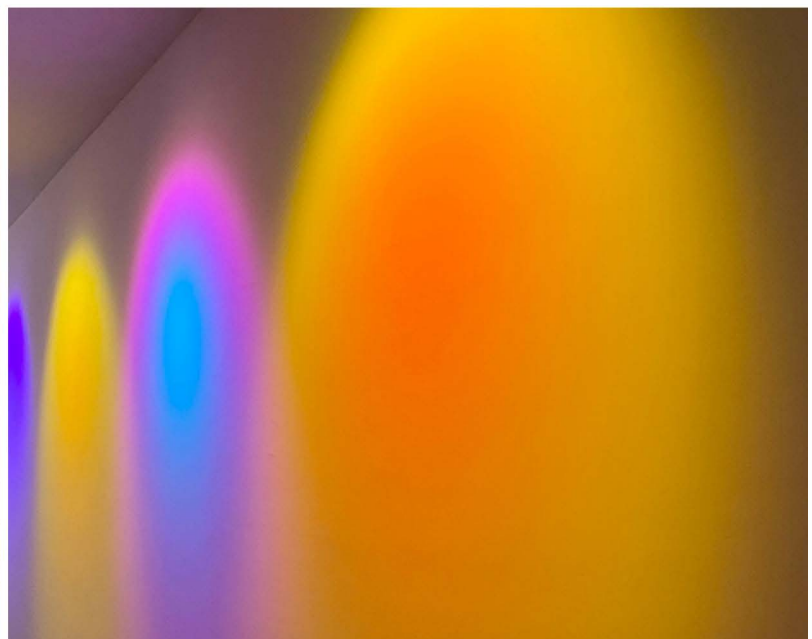




- Ra  $\geq$  97, high color rendering
- Thickened base, sturdy and reliable
- Aluminum alloy lamp body
- Soft and comfortable lighting
- minimal design

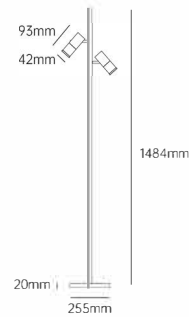


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
FL-GUS-2	5W*2	$\geq$ 350lm*2	Portable floor mounted	non dimming Local dimming	3000K 4000K 6000K	9-50 degree	White Black	no

- Application scenarios: commercial, home, and art spaces.

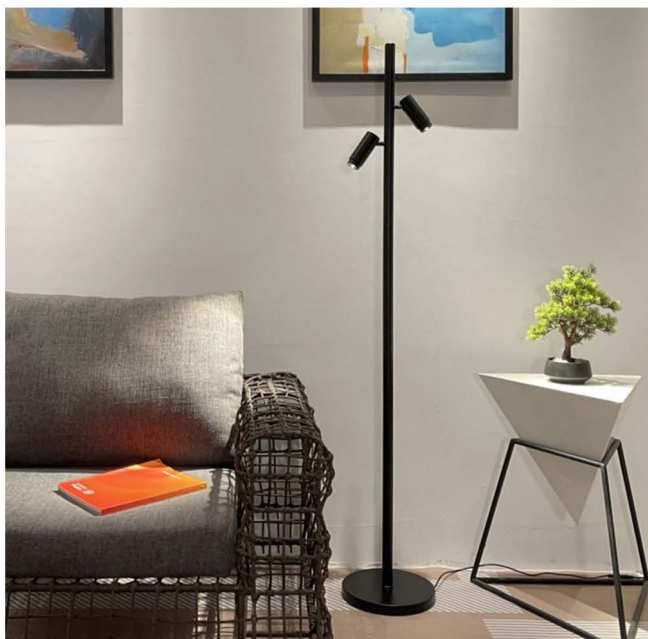




- Ra  $\geq$  97, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, avoiding injury

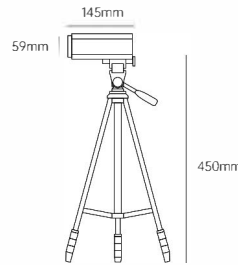


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
CUB-Cinema	12W 18W	$\geq$ 900lm $\geq$ 1080lm	Portable floor mounted	220V Triac dimming DALI dimming	3000K 4000K 6000K	10-40 degree	White Black	 anti-dazzling screen   honeycomb

- Application scenarios: art galleries, tea spaces, shopping malls, etc.

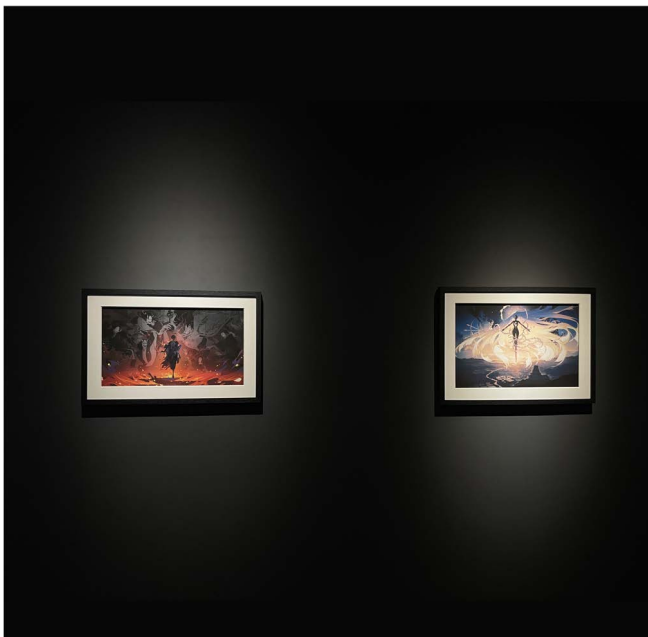



- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, Uniform light effect



Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Deep-Line	20W	$\geq$ 1400lm	Embedded (Opening273*37mm)	non dimming 220V Triac dimming DALI dimming	3000K 4000K 6000K	Floodlight	White Black	no

- Application scenarios: exhibition cabinets, art galleries, museums.





- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, Uniform light effect




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Deep-Line	30W	$\geq$ 2100lm	Embedded (Opening 405*37mm)	non dimming 220V Triac dimming DALI dimming	3000K 4000K 6000K	Floodlight	White Black	no

- Application scenarios: exhibition cabinets, art galleries, museums.






- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- Anti glare, Uniform light effect




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Deep-Line-10W-1	10W	$\geq$ 700lm	Embedded (Opening140*37mm)	non dimming 220V Triac dimming	3000K 4000K 6000K	Floodlight	White Black	no

- Application scenarios: exhibition cabinets, art galleries, museums.

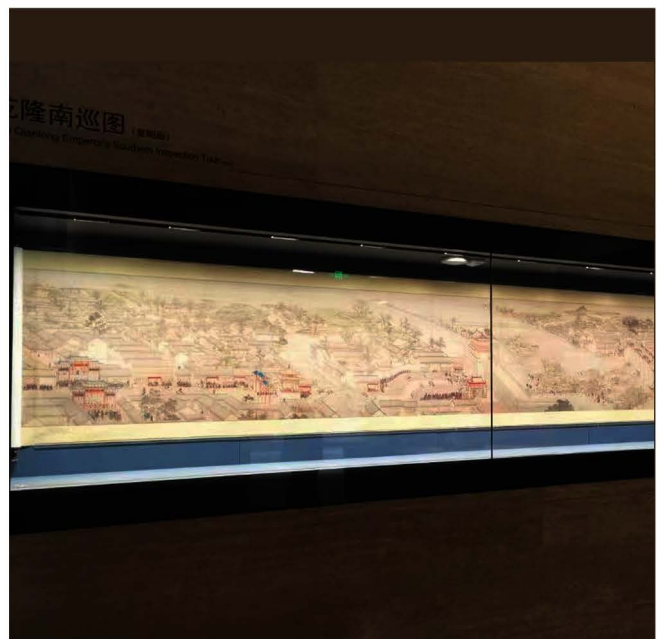




- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- 24V low-voltage safety current
- The anti glare polarized grille design provides excellent wall washing effect.




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
ARSL	5W	$\geq$ 560lm	surface mount	non dimming 0-10V dimming	3000K 4000K 6000K	Floodlight	Black	no

- Application scenarios: exhibition halls, art galleries, museums.

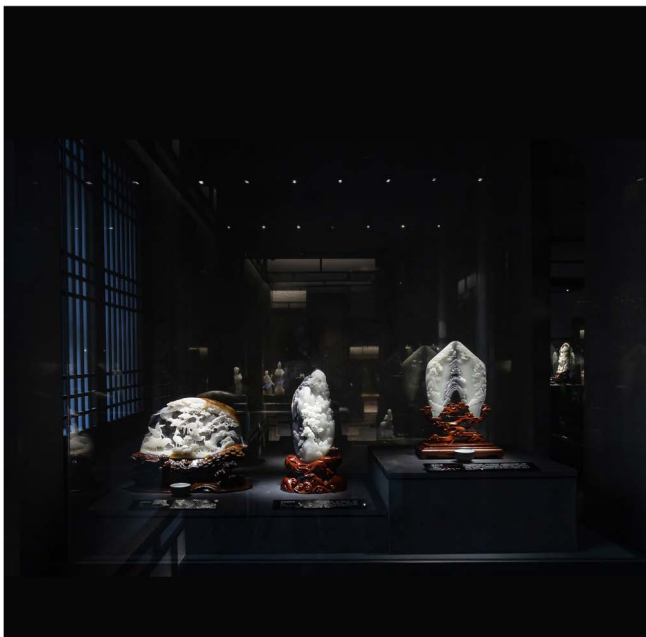





- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- 24V low-voltage safety current
- The anti glare polarized grille design provides excellent wall washing effect.

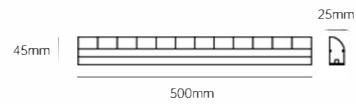


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
ARSL	12W	$\geq$ 1344lm	surface mount	non dimming 0-10V dimming DALI dimming	3000K 4000K 6000K	Floodlight	Black	no

- Application scenarios: exhibition halls, art galleries, museums.

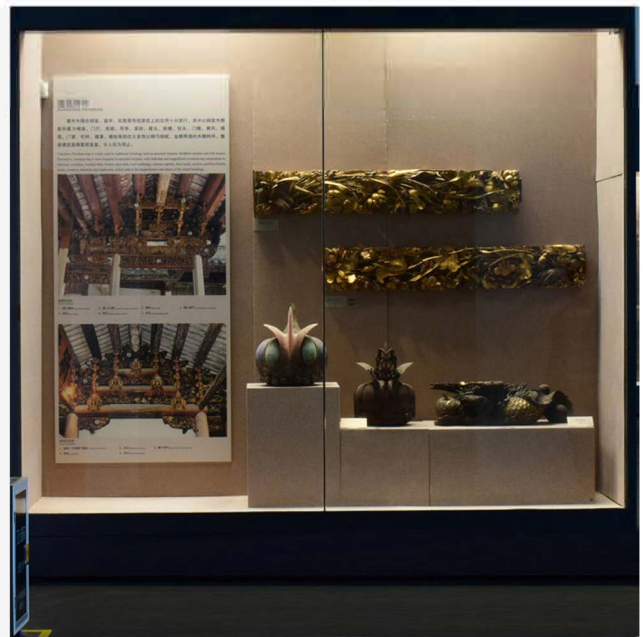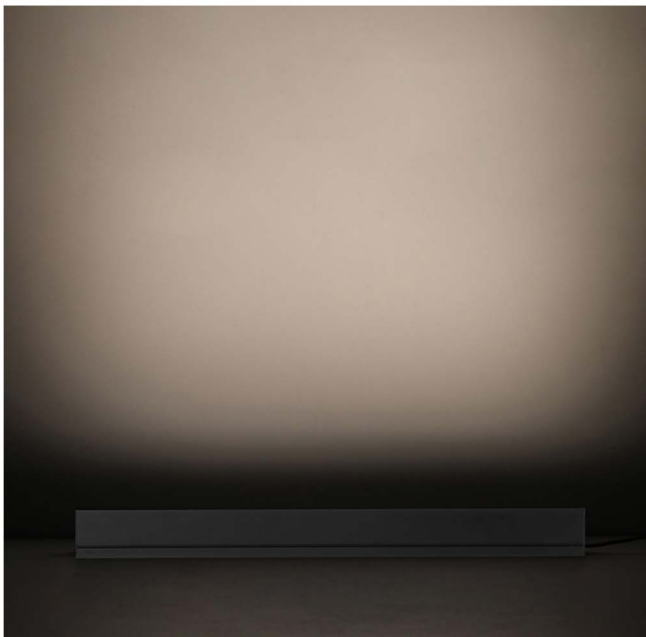





- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- 24V low-voltage safety current
- The anti glare polarized grille design provides excellent wall washing effect.

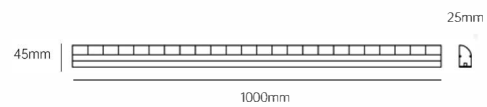

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
ARSL	24W	$\geq$ 2688lm	surface mount	non dimming 0-10V dimming DALI dimming	3000K 4000K 6000K	Floodlight	Black	no

- Application scenarios: exhibition halls, art galleries, museums.

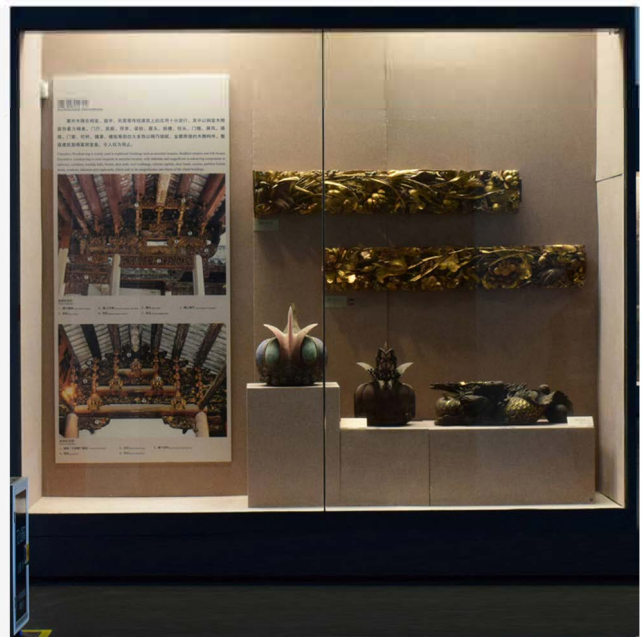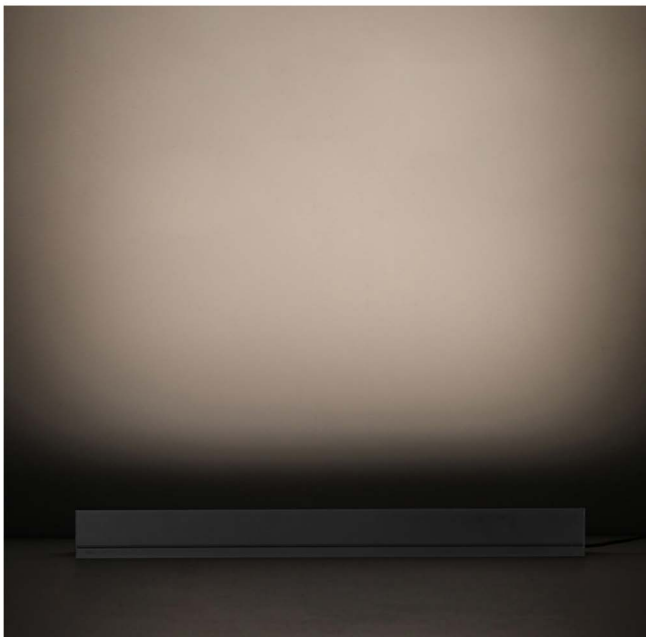




- 60 degree swing angle adjustment
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- 24V low-voltage safety current
- The anti glare polarized grille design provides excellent wall washing effect.




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
ARS-B-250	6W	≥560lm	surface mount	non dimming 0-10V dimming	3000K 4000K 6000K	120 degree	Black	no

- Application scenarios: exhibition halls, art galleries, photo washing walls

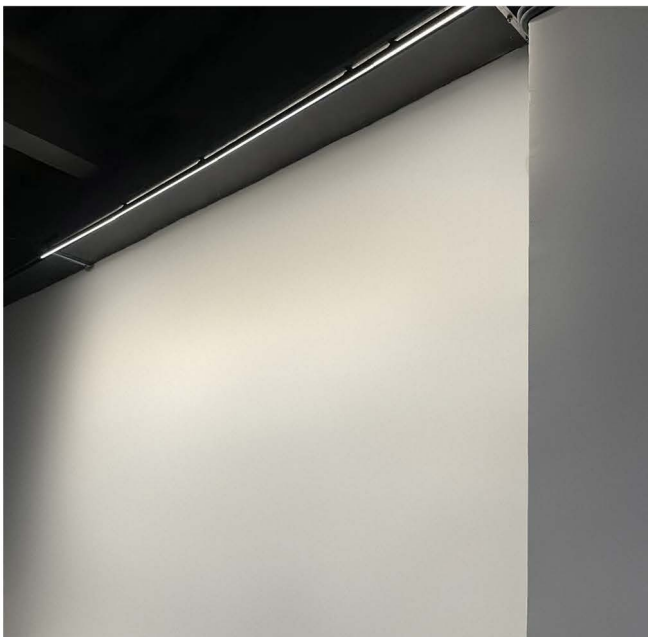




- 60 degree swing angle adjustment
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- 24V low-voltage safety current
- The anti glare polarized grille design provides excellent wall washing effect.



Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
ARS-B-500	12W	≥1000lm	surface mount	non dimming 0-10V dimming	3000K 4000K 6000K	120 degree	Black	no

- Application scenarios: exhibition halls, art galleries, photo washing walls

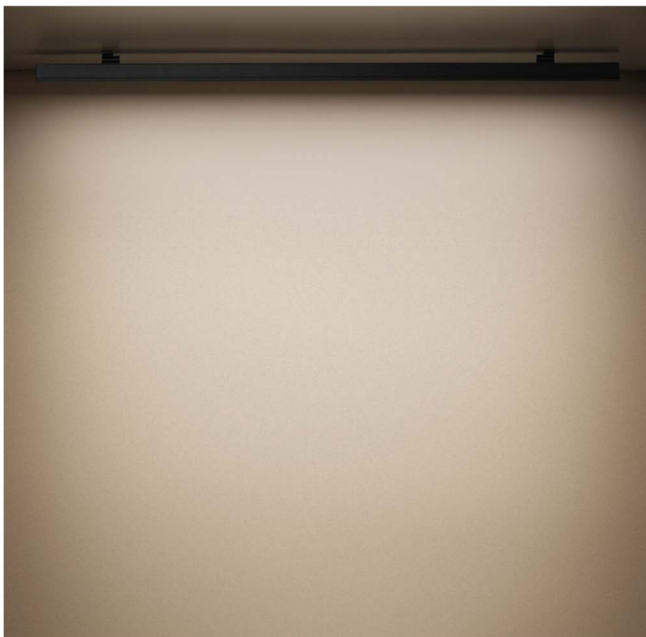




- 60 degree swing angle adjustment
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- 24V low-voltage safety current
- The anti glare polarized grille design provides excellent wall washing effect.




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
ARS-B-1000	30W	≥ 3300lm	surface mount	non dimming 0-10V dimming	3000K 4000K 6000K	120 degree	Black	no

- Application scenarios: exhibition halls, art galleries, photo washing walls

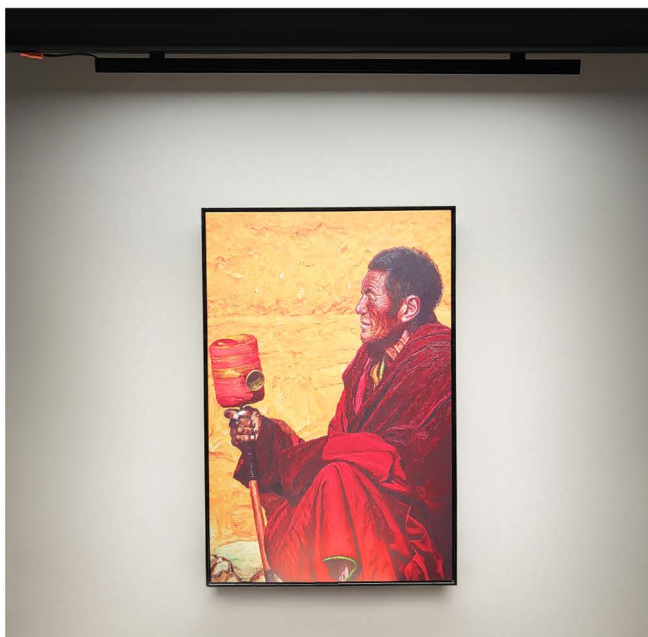




- 60 degree swing angle adjustment
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- 24V low-voltage safety current
- The anti glare polarized grille design provides excellent wall washing effect.




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
ARS-B-250	6W	≥560lm	Embedded	non dimming 0-10V dimming	3000K 4000K 6000K	120 degree	Black	no

- Application scenarios: exhibition halls, art galleries, photo washing walls

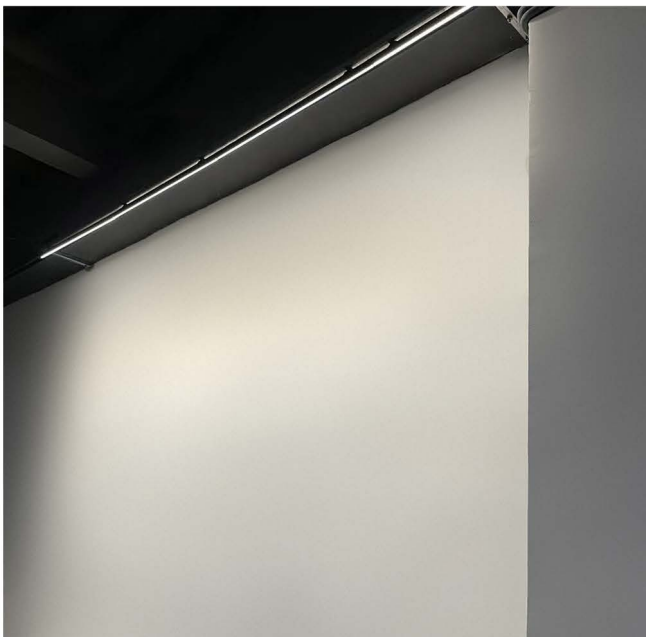




- 60 degree swing angle adjustment
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- 24V low-voltage safety current
- The anti glare polarized grille design provides excellent wall washing effect.



Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
ARS-B-500	12W	≥1000lm	Embedded	non dimming 0-10V dimming	3000K 4000K 6000K	120 degree	Black	no

- Application scenarios: exhibition halls, art galleries, photo washing walls

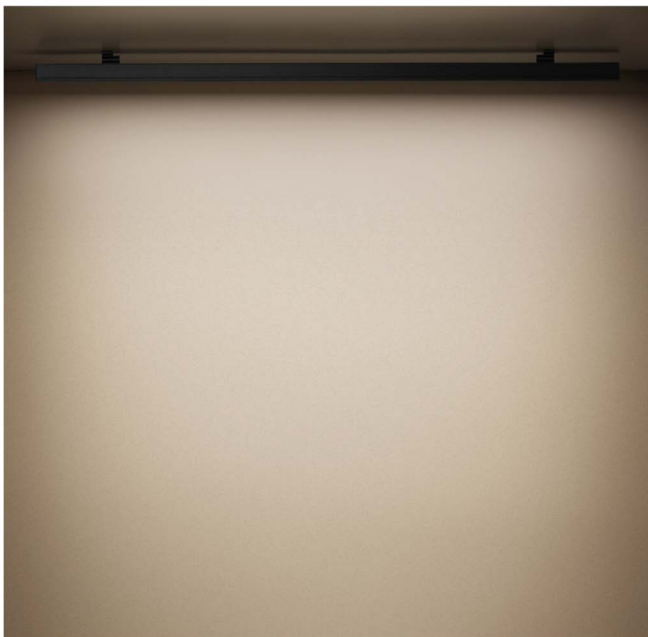





- 60 degree swing angle adjustment
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- 24V low-voltage safety current
- The anti glare polarized grille design provides excellent wall washing effect.



Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
ARS-B-1000	30W	≥3300lm	Embedded	non dimming 0-10V dimming	3000K 4000K 6000K	120 degree	Black	no

- Application scenarios: exhibition halls, art galleries, photo washing walls

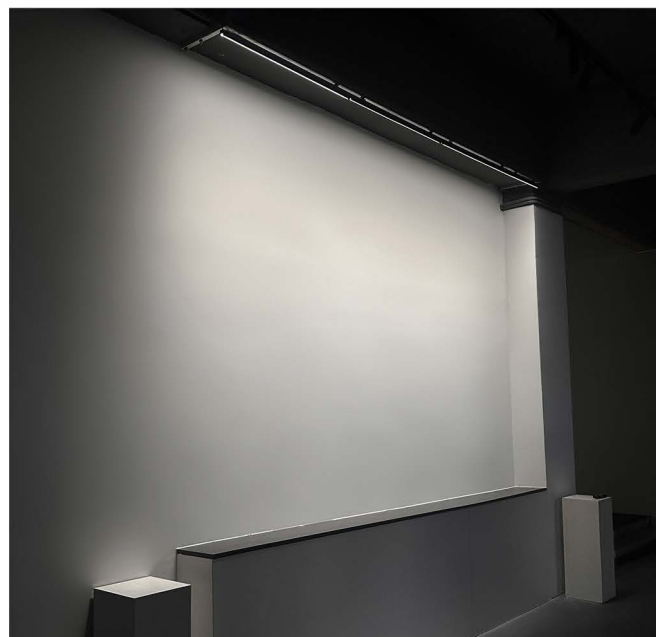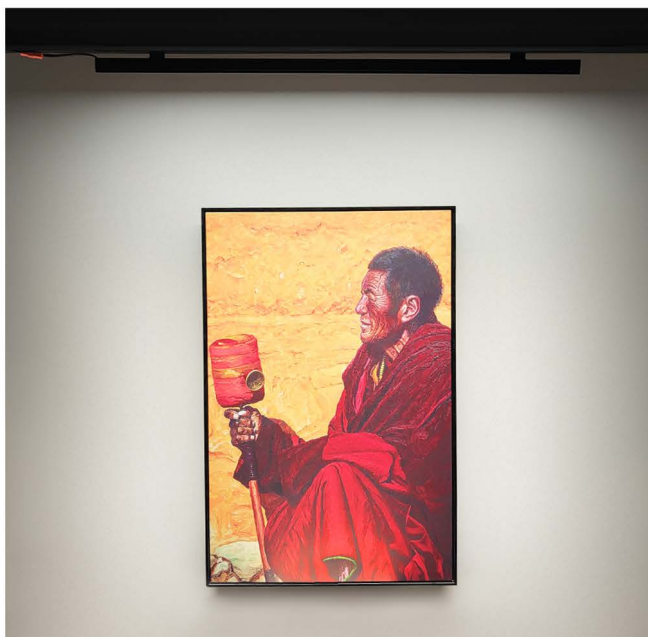




- IP65 waterproof rating
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- 24V low-voltage safety current
- 10~42 ° zoom



Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Out~Spot	7W	≥560lm	surface mount	non dimming	2700K 3000K 4000K	10~42 degree	Black	 honeycomb

- Application scenario: Outdoor landscape

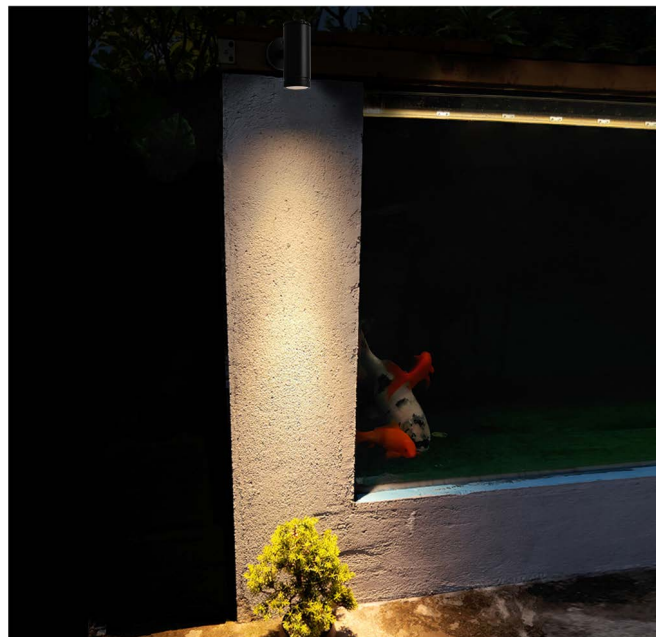





- IP65 waterproof rating
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- 24V low-voltage safety current
- 10~42 ° zoom




Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Out~Spot	7W	≥560lm	surface mount	non dimming	2700K 3000K 4000K	10~42 degree	Black	 honeycomb

- Application scenario: Outdoor landscape

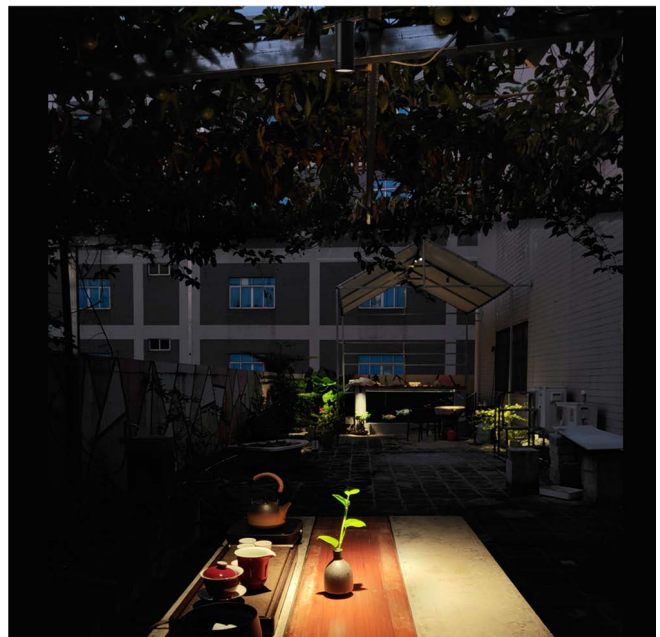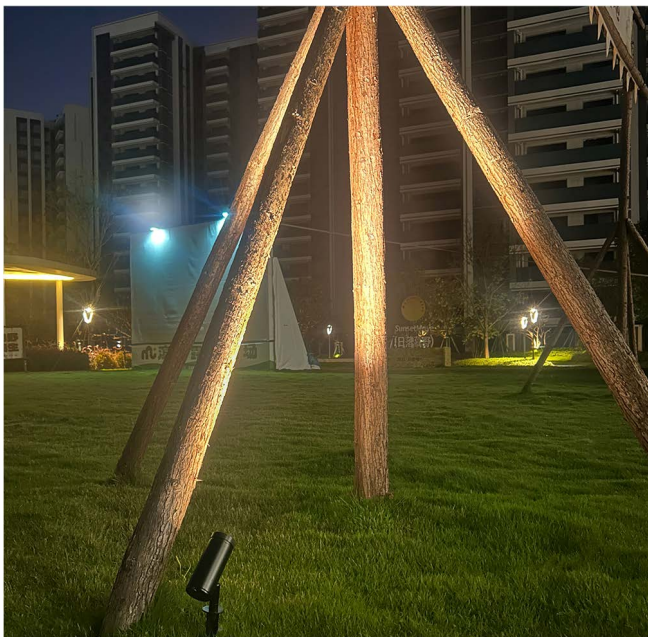




- Ra  $\geq$  90, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Uniform light effect
- Professional optical lens, with uniform light emission and no dark areas.

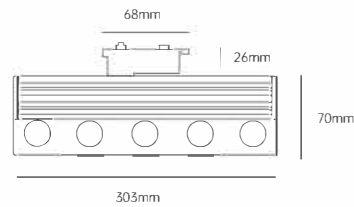


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
BankoY 0420	20W	$\geq$ 1200lm	3wires track 4wires track	non dimming 0-10V dimming DALI dimming	3000K 4000K 6000K	Floodlight	Black	no

- Application scenarios: layout, calligraphy and painting.

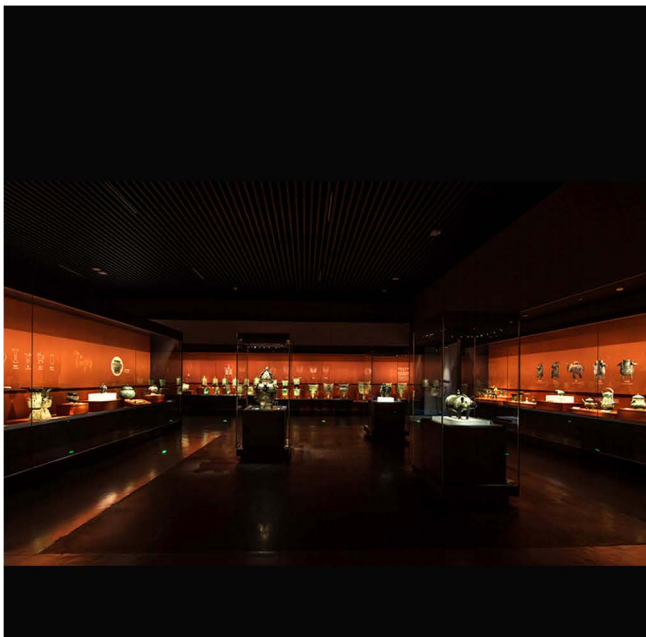





- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- beam angle : fix angle 142\*75 degree

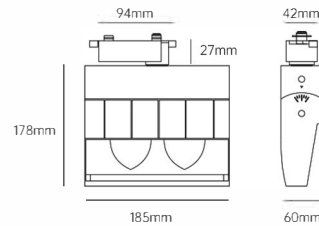


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Banko -24W	24W 35W	$\geq$ 2400lm $\geq$ 3500lm	3wires track 4wires track	non dimming 220V Triac dimming DALI dimming	3000K 4000K 6000K	142*75 degree	White Black	no

- Application scenarios: layout, painting, sculpture.

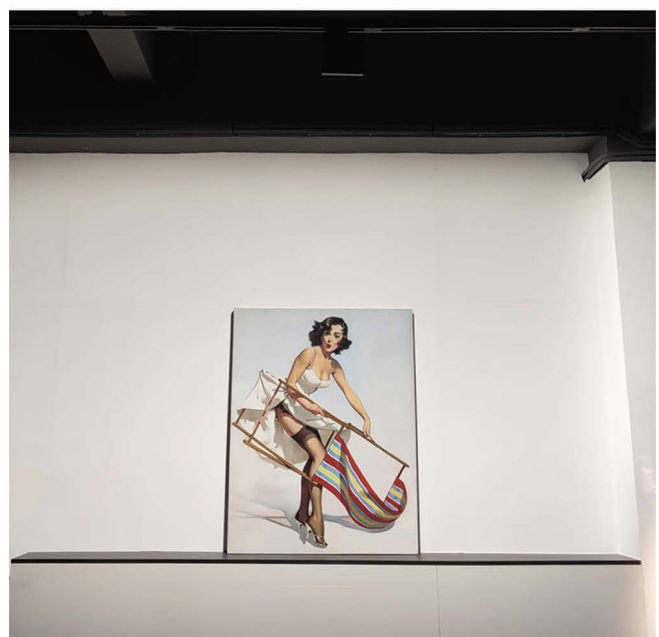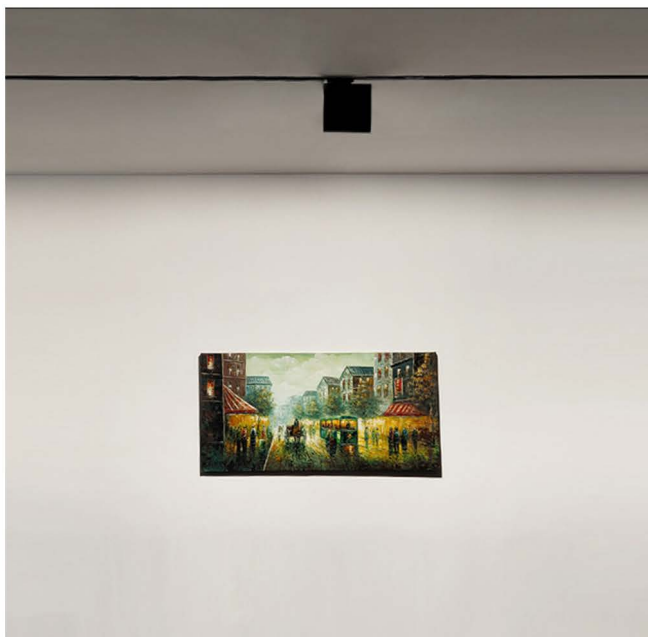




- Ra  $\geq$  95, high color rendering
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- Soft and comfortable lighting
- beam angle : fix angle 142\*75 degree

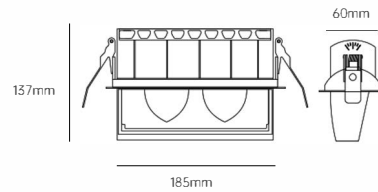


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
BANKO -24W-Q	24W	$\geq$ 2400lm	Embedded (Opening 77*205mm)	non dimming	3000K	142*75 degree	White Black	no
	35W	$\geq$ 3500lm		220V Triac dimming	4000K			
				DALI dimming	6000K			
				0-10V dimming				

- Application scenarios: layout, painting, sculpture.

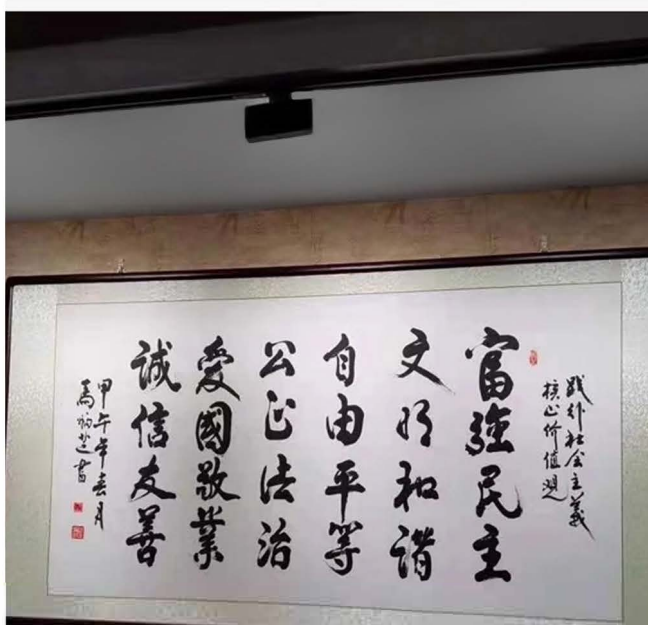



- 360 degree horizontal rotation
- 180 degree vertical swing
- Projection pattern customization
- Soft and comfortable lighting
- High quality aluminum alloy lamp body

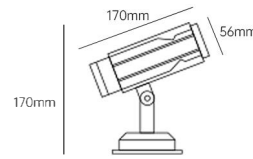

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
Promo	12W	≥1200lm	Surface	Non dimming	No	Floodlight	Black	No


- Application scenario: Logo projection street advertising

### Spot effect






- 24V safety
- Good flexibility
- Uniform light color and soft light
- High brightness, dustproof and waterproof
- 3M adhesive for more stable adhesion

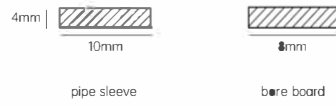


Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
cob 5051	5W/1M	≥ 900lm/m	Surface	Non dimming	3000K 4000K 6500K	180 degrees	White	No

- Application scenarios: home, commercial, and hotel

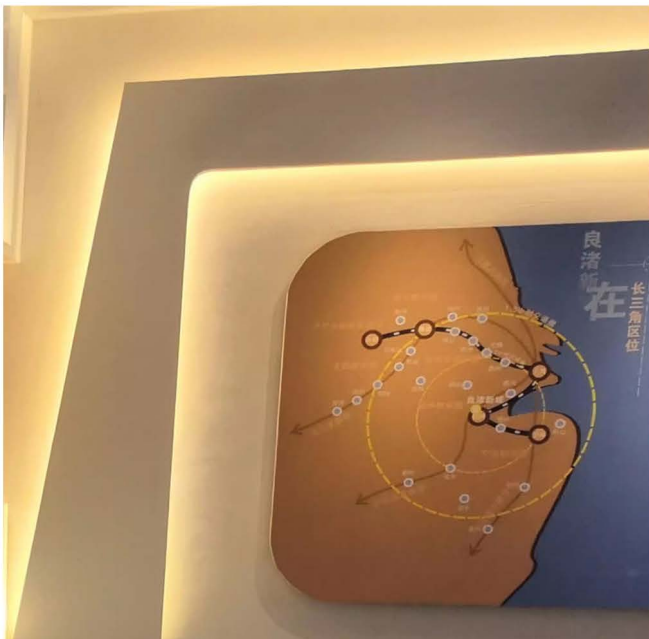





- Bright anti glare lighting
- Compact structure, high-quality and delicate.
- Aluminum alloy lamp body
- High color rendering index
- Energy saving and high efficiency

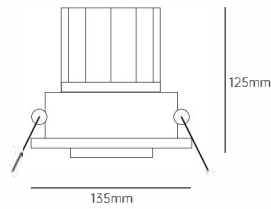

Model number	Wattage	luminous flux	Installation	Dimming	Color temperature	Beam angle	Housing color	Optional Accessories
DD	30-35W	≥1680lm	Embedded (Cutout 120mm)	DMX	RGBWW	38 Degree 60 Degree	White Black	no

- Application: Best- suited for accent lighting

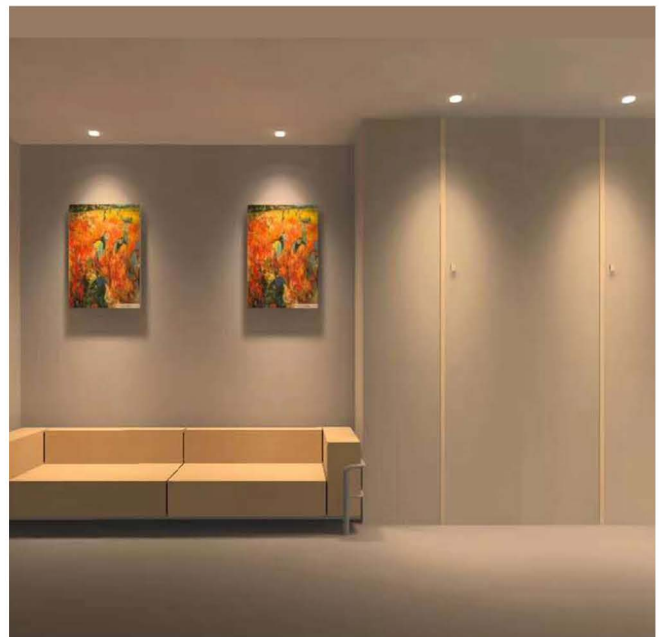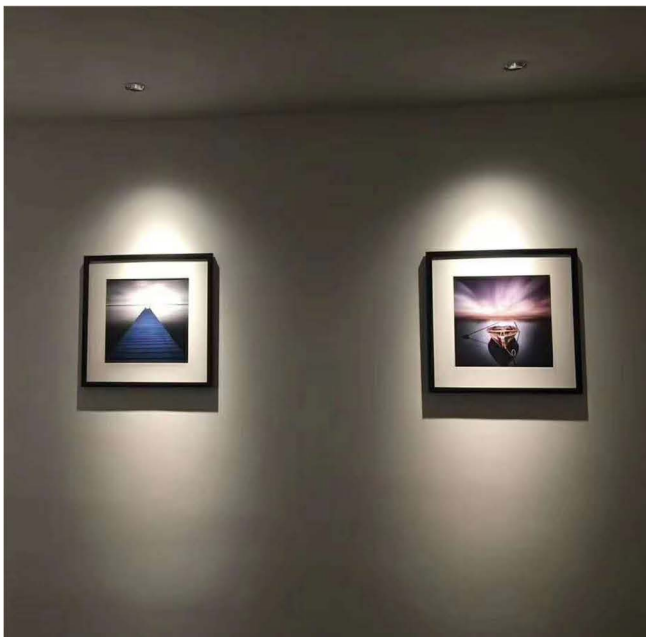



**Arasvet**

---

Artur Dubrovskii +79629854993